WIRELESS ENGINEER

THE JOURNAL OF RADIO RESEARCH & PROGRESS

AUGUST 1955

VOL. 32 No. 8 · THREE SHILLINGS AND SIXPENCE

AVO

WIDE RANGE *Signal* GENERATOR

WE SHALL BE AT THE **RADIO SHOW** EARLS COURT AUG 24 - SEPT 3

Stand No. **116**

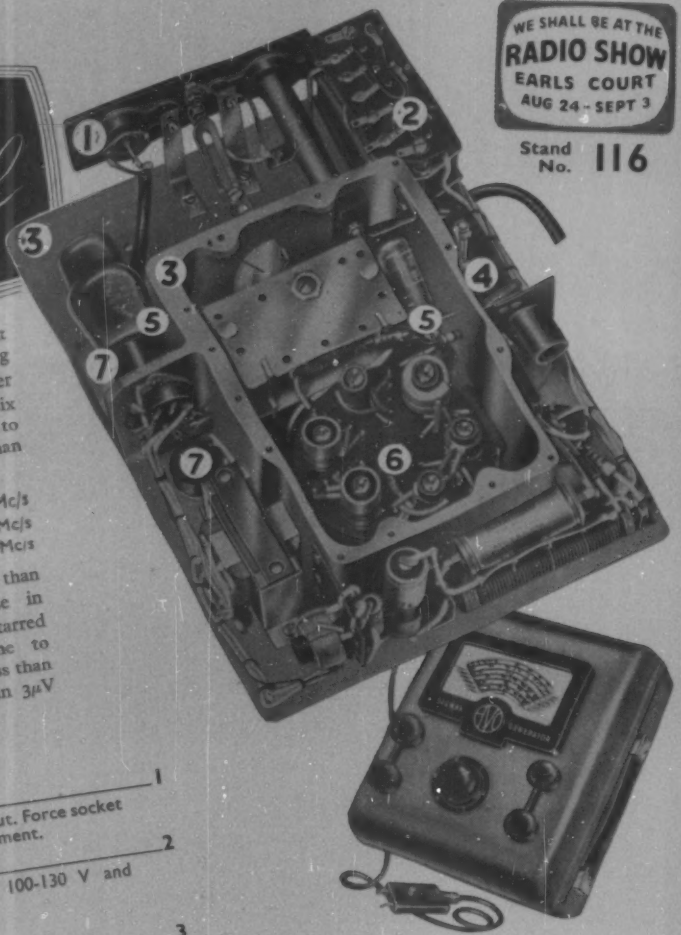

An inexpensive yet precision instrument designed specially to meet the exacting needs of the modern service engineer and laboratory technician. With six frequency ranges covering 50 Kc/s to 80 Mc/s, its accuracy is better than ±1% of the scale reading.

50 Kc/s-150 Kc/s	1·5 Mc/s-5·5 Mc/s
150 Kc/s-500 Kc/s	5·5 Mc/s-20 Mc/s
500 Kc/s-1·5 Mc/s	20 Mc/s-80 Mc/s

Scale sub-divisions provide more than adequate discrimination for use in television circuits. Note the starred features below, which combine to maintain a minimum signal of less than 1μV up to 20 Mc/s and less than 3μV between 20 Mc/s and 80 Mc/s.

1 **★OUTPUT**
Co-axial socket for attenuated output. Force socket located totally within H.F. compartment.

2 **MAINS TRANSFORMER**
Marked tagboard for inputs of 100-130 V and 200-260 V, A.C. 50/60 c/s.

3 **★CAST ALUMINIUM H.F. COMPARTMENT and CHASSIS**
Large number of fixing holes for H.F. compartment cover ensures excellent electrical bonding and good screening.

4 **FUSE**
Easily accessible when replacement is necessary.

5 **VALVES**
Standard types run at a rating to ensure long life.

6 **TURRET COIL SWITCHING**
Standard "AVO" practice.

7 **★ATTENUATOR SYSTEM**
Employs close tolerance, high stability midget carbon resistors, low reactance rotary potentiometer modified for H.F. operation with carefully designed screening.

Other features include:

ILLUMINATED SPOT RANGE SELECTOR
Gives rapid identification of operational band with intensified lighting round precise frequency. Fine hair line gives close discrimination, particularly on high frequencies.

STOPS
Separate stops prevent turning of dial with respect to condenser.

★MAINS FILTER SYSTEM
This is screened from main electrical assembly.

BUSHING PLATES
provide additional rigidity for rotary controls.

SLOW MOTION DRIVE
Substantially free from backlash.

MAINS MODEL 100-130 V and 200-260 V, A.C., 50-60 c/s
OR BATTERY MODEL.....£30

Regd. Trade Mark

THE AUTOMATIC COIL WINDER & ELECTRICAL EQUIPMENT CO. LTD.
AVOCET HOUSE · 92-96 VAUXHALL BRIDGE ROAD · LONDON · S.W.1
Telephone: VICtoria 3404 (9 lines)

S.G.2

A NEW-PRINCIPLE A-C AUTOMATIC VOLTAGE STABILISER

We have now had released to us by a Government Department the design of our "A.C. Mains Regulator, Automatic, Step, Mark II", and are therefore manufacturing this unit for general sale. It ideally fills the need for a cheap, small and light Stabiliser. Although it measures only 8½in. x 4½in. x 5in., weighs as little as 11 lbs., and costs only £24 net, it has a performance fully equal to any similarly rated Automatic Stabiliser of the resonated, saturated core type, without any of the disadvantages.

ASR-1150 has a pure output waveform, is unaffected by changes in mains frequency, and works equally well from no-load to full load, which is 1150 VA. It has a stabilised output at 230V unless otherwise ordered.

Many other Automatic Voltage Stabilisers are now manufactured by us, and all are available for immediate delivery. In some cases the constancy of output is as high as 0.15%. Models are available from 200 VA to 30 kVA, single phase. 3-Phase Stabilisers are also available. Prices are *extremely* competitive.

We can supply from stock all types of American tubes, condensers, valves, potentiometers, etc.

MEMO: If you are interested in infinitely-variable Transformers, do not forget the almost indispensable "VARIAC" (Reg'd. Trademark). Models are available from 170VA to 21kVA. Our Catalogue V-549 (3rd Edition) tells the whole story and will gladly be mailed free and post free, on request.

The *NEW "ASR-1150"* costs only *£24* net

Complete information is obtainable from:

CLAUDE LYONS LTD., *STABILISER DIVISION,*
HEAD OFFICES & WORKS: 76 OLDHALL STREET, LIVERPOOL 3, LANCS.
SOUTHERN FACTORY: VALLEY WORKS, WARE ROAD, HODDESDON, HERTS.
(A10 main London/Cambridge Road, at Junction of A602)

'Frequentite' is the most suitable insulating material for all high frequency applications. Seventeen years ago we introduced the first British-made low-loss ceramic, and consultation with us before finalising the design of new components is a wise precaution.

STEATITE & PORCELAIN PRODUCTS LTD.

Head Office: Stourport-on-Severn, Worcestershire. Telephone: Stourport 111. Telegrams: Steatain, Stourport

S.P.66

Valves for Industry
R.F. Heating

The increasing use of R.F. Heating in industry has shown the need for units to provide outputs between 10 and 50 kW

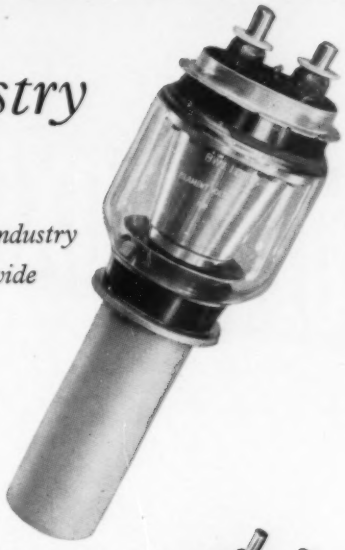

To meet this demand, the English Electric Valve Company have developed two new valves for R.F. generators of 10 kW and upwards. These new products are not modifications of valves used for communications, but are designed expressly for operation under the less favourable conditions imposed by factory use. They are rugged and will withstand severe overloads; they are low in first cost and have a long service life. Both types are available in air-cooled or water-cooled versions and a suitable range of rectifying valves for use in conjunction with them is also available.

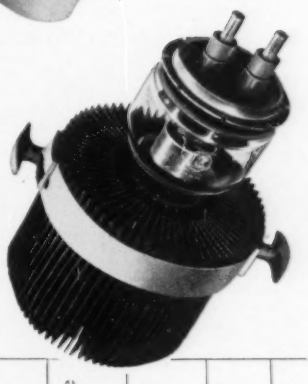

'ENGLISH ELECTRIC'

Type	Maximum Operating Frequency at Full Rating (Mc/s)	Cathode	Dimensions (*maximum*)		Filament		Maximum Anode Voltage kV.(D.C.)	Maximum Anode Dissipation (Kilowatts)	Useable Emission (Amperes)	Amplification Factor	Mutual Conductance (mA/V)
			Length mm.	Diameter mm.	Volts	Amperes					
BR. 1102	50	Th.	483	241	8·2	230	12·0	20·0	45	42	20·0
BW.1102	50	Th.	473	152	8·2	230	12·0	20·0	45	42	20·0
BR. 1103	100	Th.	356	203	6·0	120	8·5	10.0	16	25	8·3
BW.1103	100	Th.	343	116	6·0	120	8·5	10·0	16	25	8·3

NOTE: CATHODE:—Th. *denotes* THORIATED TUNGSTEN. BW. *denotes* WATER-COOLED.
BR. *denotes* AIR-COOLED. *Technical data sheets are available on request.*

ENGLISH ELECTRIC VALVE CO. LTD. *Waterhouse Lane, Chelmsford*
Telephone: Chelmsford 3491

AP 300-20

for all Good Instruments S·E·I

COPPER OXIDE RECTIFIERS

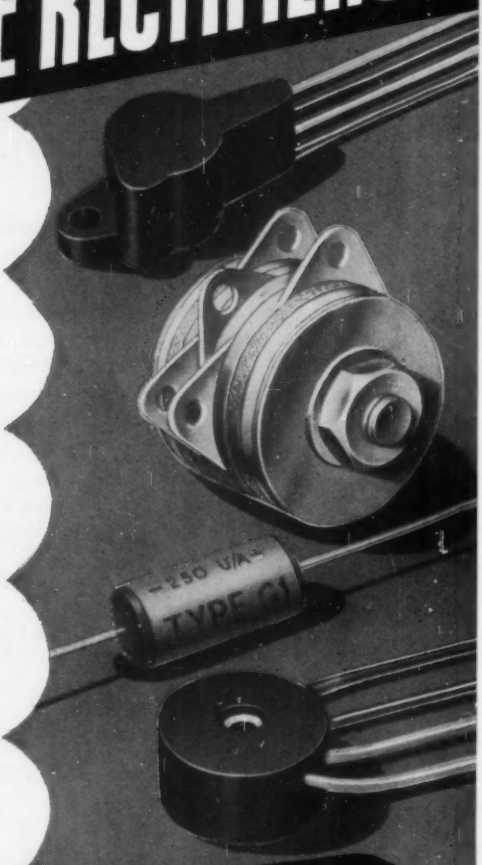

A range of rectifiers designed to suit all types of instrument movements.

The performance data and details of the types available are given in our publication No. C.O.R. 5305/2.

Please apply to the following address:—

SALFORD ELECTRICAL INSTRUMENTS LIMITED

PEEL WORKS · SILK STREET · SALFORD 3 · LANCASHIRE

A Subsidiary of THE GENERAL ELECTRIC CO. LTD. OF ENGLAND.

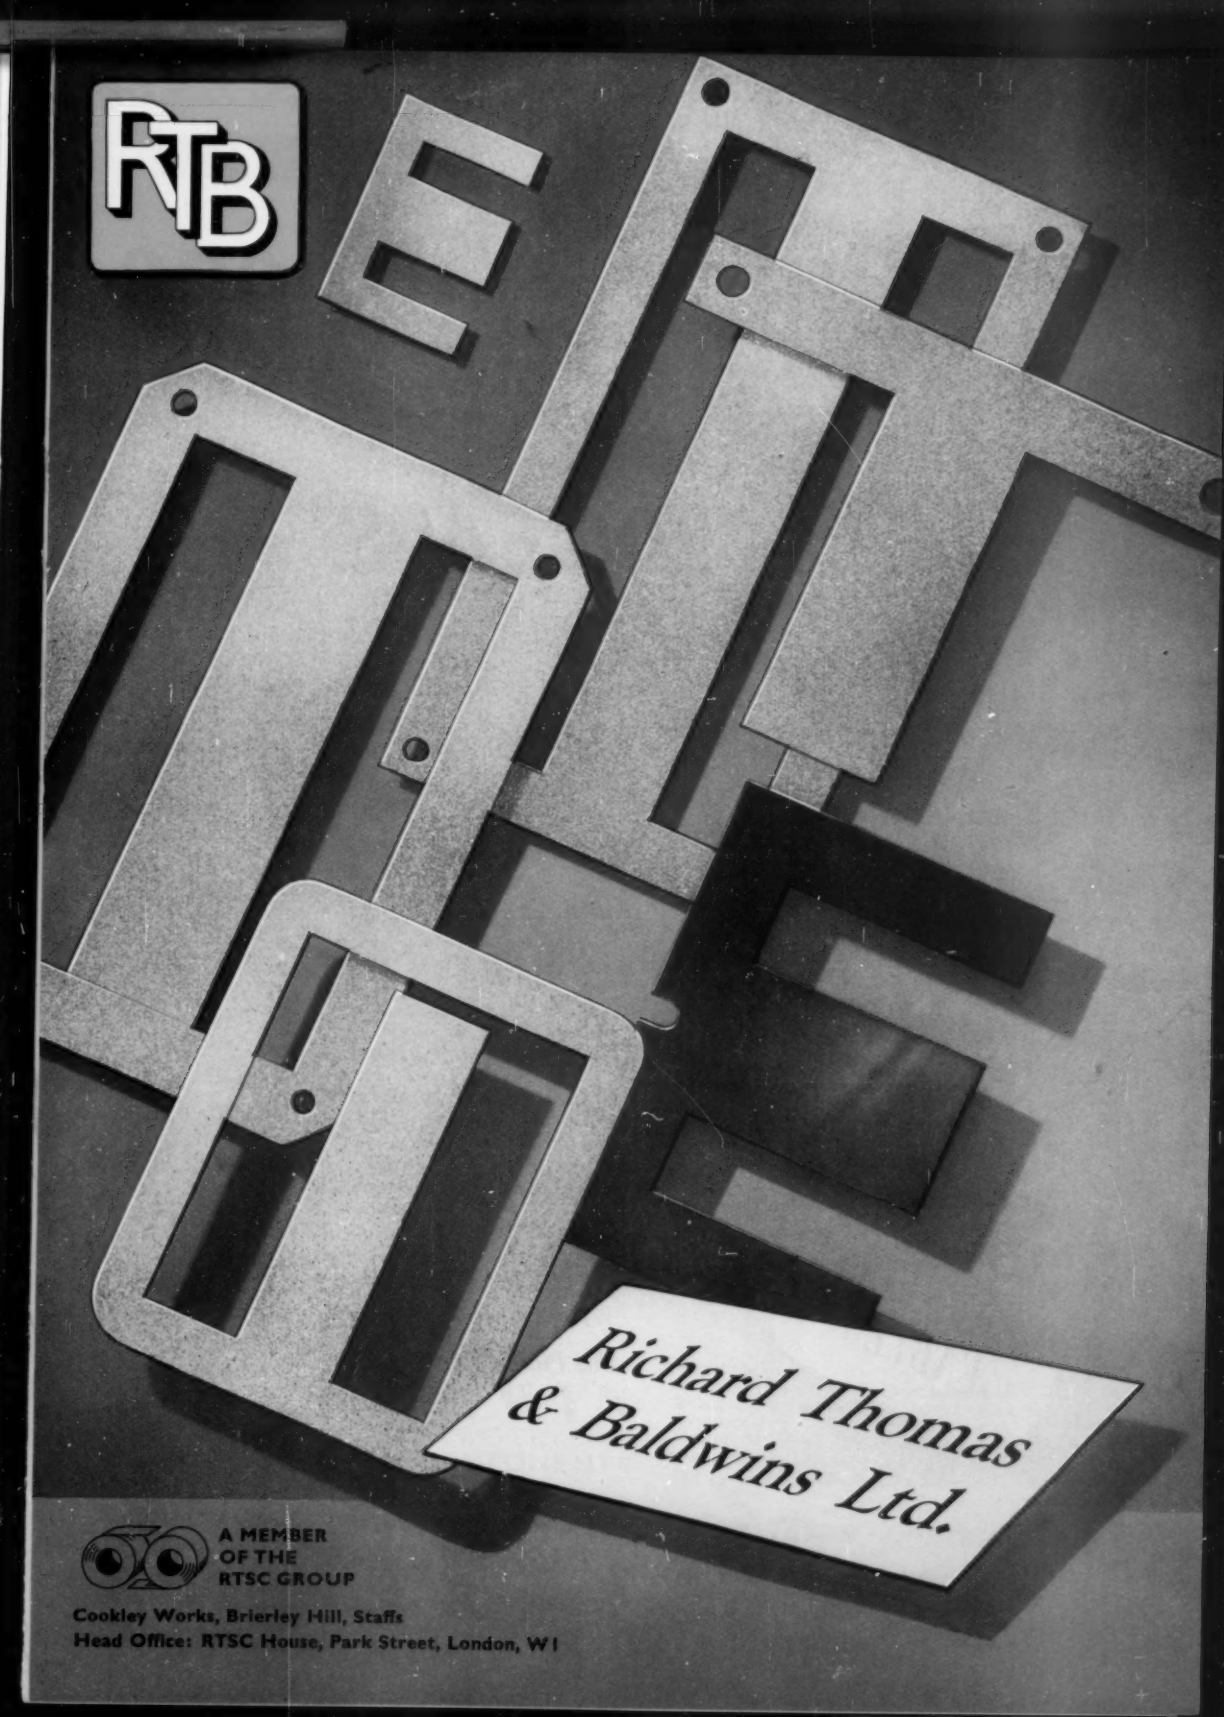

A MEMBER
OF THE
RTSC GROUP

Cookley Works, Brierley Hill, Staffs
Head Office: RTSC House, Park Street, London, W1

BICC Cellular Polythene

T/V DOWNLEADS

A new range of television downleads is described in this booklet. They have been developed by BICC using Cellular Polythene as the dielectric to provide minimum attenuation, and resistance to moisture ingression.

Write to-day for your copy of this Publication (*No. 357*).

BRITISH INSULATED CALLENDER'S CABLES LIMITED
21 BLOOMSBURY STREET, LONDON, W.C.1

Consistency of Performance

Just one of a bunch...

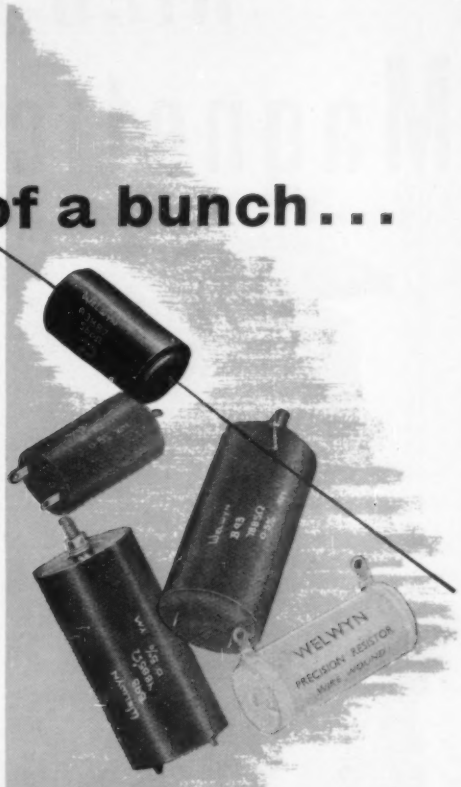

WE test our precision resistors on a sampling basis. Here's the performance of one little fellow, taken at random from a batch and loaded at its full rated power for close on 1,000 hours. You'll see from the chart how it stood up to the treatment: *a total excursion of* 0.036% and an absolute change of only 0.01%.

...and they're all much alike!

Even our miniature precision resistors are guaranteed a standard tolerance of 0.1%.
Welwyn Precision Wirewound Resistors for
LONG TERM STABILITY · FREEDOM FROM NOISE · FINE PERFORMANCE IN TROPICAL CONDITIONS

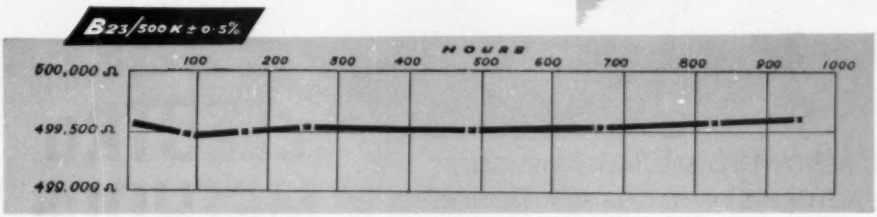

MANUFACTURERS OF
WELWYN
ELECTRICAL
COMPONENTS

Products include:
- Toroidally Wound Power Potentiometers
- Panclimatic High Stability Carbon Resistors
- Vitreous Enamelled Wirewound Resistors
- Carbon Composition and Wirewound Potentiometers
- Insulated High Stability Carbon Resistors
- High Voltage Composition Resistors

WELWYN ELECTRICAL LABORATORIES LTD · BEDLINGTON · NORTHUMBERLAND

On Admiralty, Ministry of Supply, (A.I.D. Approved) and Post Office Lists

HIGH-STABILITY
Magnetic Amplifiers

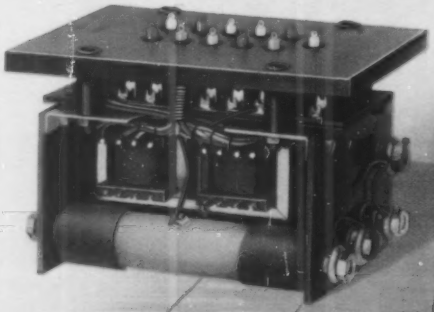

SINGLE-STAGE OR PUSH-PULL

An extensive range of standard types always available for prompt delivery

SPECIAL TYPES DESIGNED TO SUIT *YOUR* NEEDS

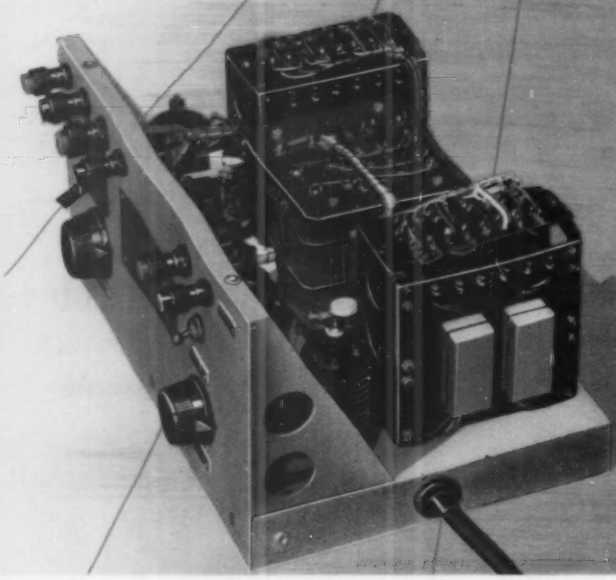

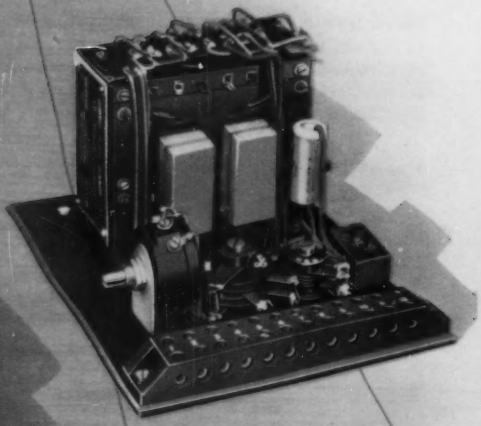

THE WORLD-RENOWNED SPECIALIST DESIGNERS AND MANUFACTURERS OF MAGNETIC AMPLIFIERS

ELECTRO METHODS LTD OF STEVENAGE

Now FREE to all!

THE E-M TECHNICAL ADVISORY SERVICE

Regardless of whether your magnetic amplifier problem is simple or complex, the fact remains that the only reliable solution is that which entirely eliminates risk.

We therefore respectfully invite you to avail yourself of the wide resources of technical knowledge and practical experience possessed by the specialist technicians of our Magnetic Amplifier Division

Full technical data and illustrated leaflets promptly forwarded on request!

ELECTRO METHODS LTD., 22-46 CAXTON WAY, STEVENAGE, HERTS · Phone: STEVENAGE 780

G.E.C.

EW54 Germanium Junction Power Diode

NOW AVAILABLE TO ELECTRONIC EQUIPMENT MANUFACTURERS

The EW54 p-n junction germanium diode is intended for use in rectifier circuits at medium voltage and current. The diode is hermetically sealed in a copper container. This is particularly important because of the deleterious effects of moisture on germanium devices.

The main features of this type of diode are high rectification efficiency and small size; the former results primarily from the very low forward resistance of the diode.

The diode is of value in applications requiring outputs up to the order of 20A at voltages up to 50 (at 20°C), using a full-wave bridge arrangement.

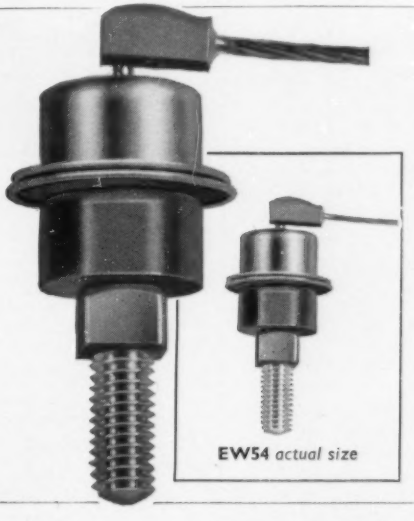

EW54 *actual size*

For a typical diode, at an ambient temperature of 20°C:

Current at $+0.5V = 8A$
at $-100V = 6mA$

Other recent G.E.C. Semi-Conductors are the
EW53 **EW58** **EW59**

Details of all the above devices may be obtained from

THE OSRAM VALVE AND ELECTRONICS DEPARTMENT

THE GENERAL ELECTRIC CO. LTD., MAGNET HOUSE, KINGSWAY, LONDON, W.C.2

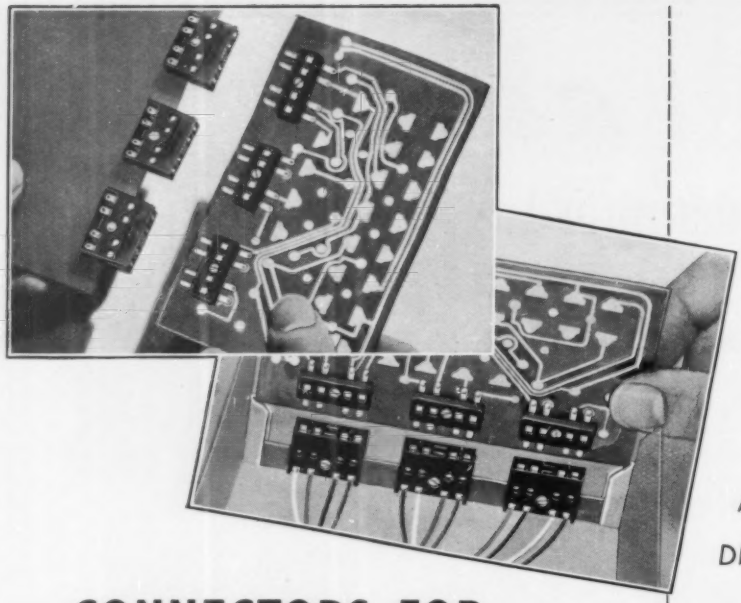

CONNECTORS FOR PRINTED CIRCUITS

These connectors offer a very wide choice of mounting arrangements and will cover most known applications. Designed specifically for versatility and easy fixing, they can be mounted side-by-side in multiples of four connector strips to produce a practically unlimited number of contacts or they can be "stacked" (with spacers between) for compound mounting. They can also be mounted direct to plates, printed or otherwise, and are suitable for mounting on ceramic and laminated plastic printed circuits. On small-sized printed circuits the connector socket will often give mechanical support as well as electrical connection.

Ribbon contact strips are gold-plated for prolonged storage life and are provided with holes in the tag to permit the anchoring of wires before soldering. A unique feature of the socket is the method by which the contact "teeth" are looped back into the moulding, thus retaining their sprung position. The strips retain sufficient flexibility to allow them to be inserted into drilled or punched holes in mating circuits and can be bent or formed as required.

Connectors can be mounted in the plane of, or at right angles to the plane of the supporting surface without the use of additional brackets or supporting structures, a centrally placed mounting hole permitting easy and direct attachment of the plug or socket to the circuit plate. Plugs and sockets are both mounted with standard 8BA screws, and the length of the screw is governed only by the thickness of the mounting plate.

BELLING & LEE LTD
GREAT CAMBRIDGE ROAD, ENFIELD, MIDDX., ENGLAND

HEAVY CURRENT LOW VOLTAGE FUSE LINK

for use on D.C. supplies in AIRCRAFT, BATTERY DRIVEN VEHICLES, &c.



The fuse is intended as a direct replacement for the American "Current Limiter" used on 28V d.c. aircraft power supplies, and for this purpose has received the approval of the Air Registration Board under their reference No. E.3217.

It is also suitable for the protection of battery operated vehicles, heavy current rectifier output circuits, low voltage furnaces and other similar d.c. applications.

SPECIFICATION: The fuselink is capable of breaking currents of up to 3,000 amperes at 30V d.c. (2,500 amperes at 30V d.c. for the 35A and 50A ratings) without any external disturbance. The arcing time does not exceed 0.003 seconds at 3,000 amperes.

RATINGS: 35A, 50A, 80A, 100A, 130A, 150A, 200A, 225A, and 275A. The range will be extended in four further steps to 500A maximum.

FOR SOUND REPRODUCTION

We are proud of the vast number of our loudspeakers incorporated in radio and television receivers used throughout the world. Their quality of reproduction and unfailing performance have been amply proved over many years in every climate and condition of service.

Rola Celestion Ltd.

FERRY WORKS, THAMES DITTON, SURREY
TELEPHONE: EMBerbrook 3402/6

Lines of communication . . .

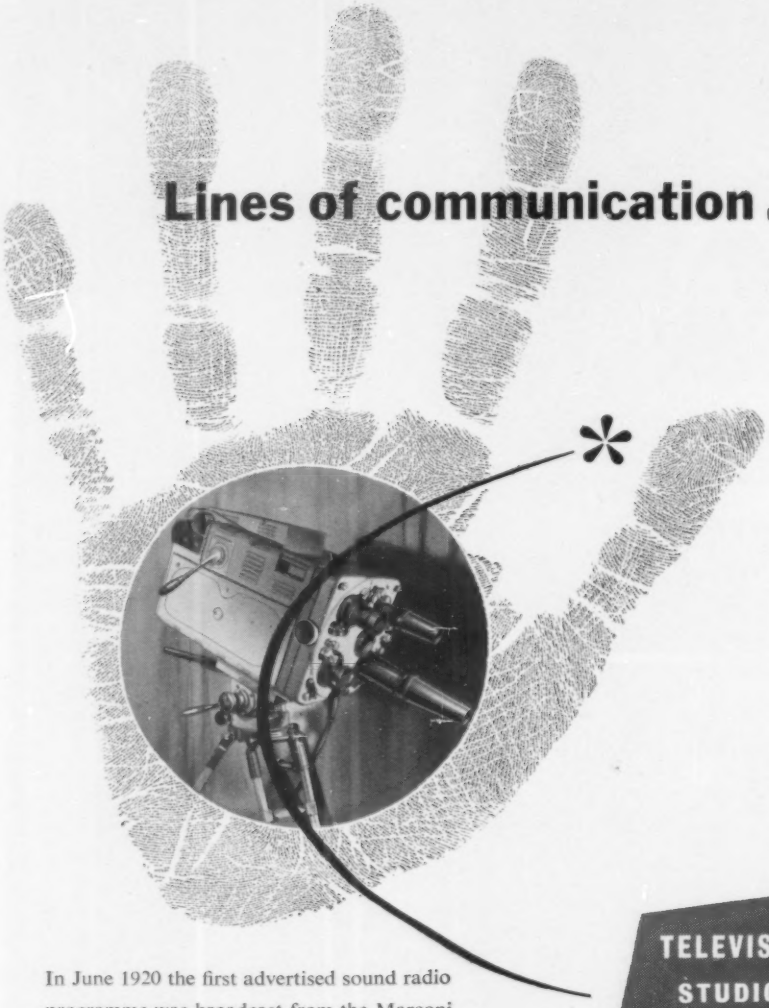

In June 1920 the first advertised sound radio programme was broadcast from the Marconi transmitter at Chelmsford. To-day Marconi high or medium power transmitters and high power aerials are installed in every one of the B.B.C.'s television transmitter stations and Marconi television systems are being supplied to countries in North and South America, Europe and Asia.

TELEVISION CAMERAS
STUDIO EQUIPMENT
RADIO LINKS AND TRANSMITTERS
AERIAL SYSTEMS
COLOUR TELEVISION
INDUSTRIAL TELEVISION

MARCONI

Complete Television and Sound Broadcasting Systems

MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED · CHELMSFORD · ESSEX
LG 3

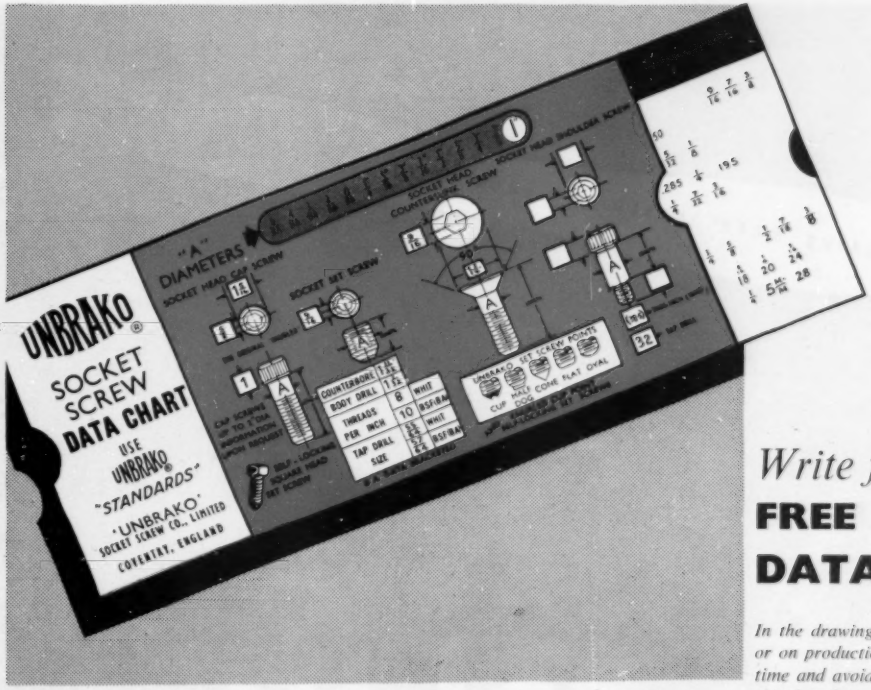

Write for this FREE DATA CHART

In the drawing office, in the toolroom or on production—you'll save valuable time and avoid costly guess-work with this free data chart.

It not only gives you details and dimensions of the standard types of Unbrako screws, but most important of all, it cuts out all physical measurement or calculation of drill and tap sizes, threads per inch, and counterbore sizes, etc., for any given size of screw—literally at a glance.

SEND FOR YOUR FREE DATA CHART TODAY!

ONE GLANCE BANISHES CHANCE

UNBRAKO

Unbrako Screws make a better job of it . . .

Where top-quality counts, Unbrako socket screws score every time. These tremendously tough, high-tensile socket screws, rigidly controlled at every stage of manufacture, are made to hairline-tolerance engineering standards, by the best equipped specialist screw organisation in the world. Their superior strength usually means that when you specify Unbrako, you can use a smaller number of screws to take the same stress. They help to speed production too. There are Unbrako stockists all over the world.

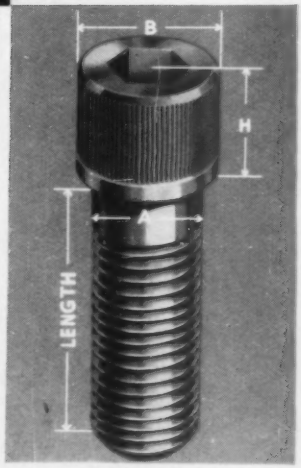

UNBRAKO SOCKET SCREW CO., LTD., COVENTRY

EPOXY RESINS MEAN 'ARALDITE'!—NOW AVAILABLE AT LOWER COST

Araldite

EPOXY RESINS

These versatile resins have a remarkable range of characteristics and uses. They combine excellent adhesion with insignificant shrinkage on setting, flexibility with toughness, outstanding electrical properties with resistance to chemicals and exposure.

They are used

- *for bonding metals and ceramics*
- *for potting and sealing electrical components*
- *for producing glass cloth laminates*
- *for producing jigs, fixtures, patterns and tools*
- *as fillers for sheet metal work*
- *as protective coatings for metal surfaces*

May we send you full details?

'ARALDITE' is a Regd. Trade Mark.

Aero Research Limited

Duxford, Cambridge.
Telephone: Sawston 187. A Ciba Company

20 Mc/s FREQUENCY MONITOR

The Automatic Frequency Monitor (20 Mc/s) is but one of a series of high grade monitors now in course of manufacture for the accurate measurement of frequency.

Employing hard valve techniques throughout, it will measure any frequency in the range 10 c/s to 20 Mc/s to an accuracy within ± 1 part in 10^6.

The result, in decimal notation, is presented on eight panel mounted meters each scaled from 0 to 9 and the unknown frequency is automatically remeasured every few seconds.

This new equipment presents a considerable advance in frequency measuring techniques and apart from normal laboratory applications, is ideally suited for incorporation in production testing routines.

Full technical information on this and other frequency measuring equipment is available on request.

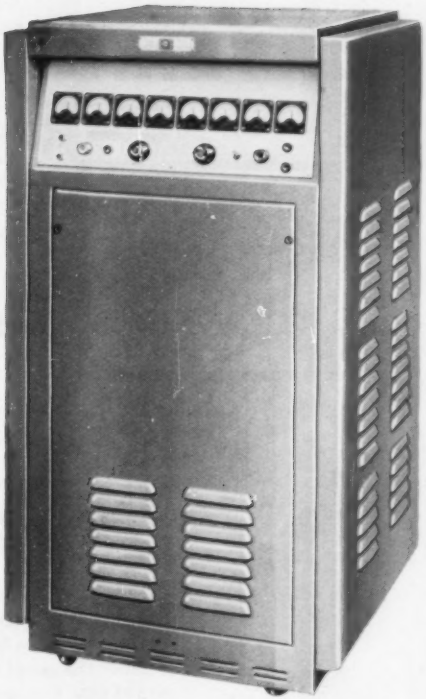

CINEMA TELEVISION LTD

A COMPANY WITHIN THE J. ARTHUR RANK ORGANISATION

WORSLEY BRIDGE ROAD · LONDON · S.E.26
HITHER GREEN 4600

SALES AND SERVICING AGENTS :

Hawnt & Co. Ltd., 59 Moor St. Birmingham, 4

Atkins, Robertson & Whiteford Ltd., 100 Torrisdale Street. Glasgow, S. 2

F. C. Robinson & Partners Ltd., 122 Seymour Grove, Old Trafford, Manchester, 16

Improved filter units

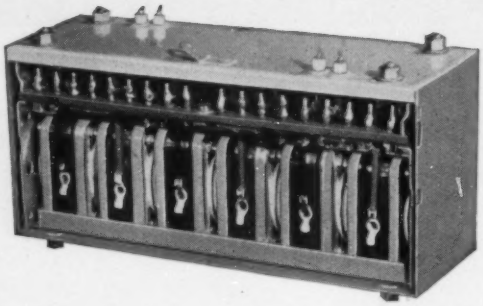



with Ferroxcube pot cores

1 *High performance combined with small size and light weight.*

2 *Designed and built to customers' individual requirements.*

3 *Long term stability, even under conditions of temperature variation.*

High quality electrical filter units built around Ferroxcube cores can now be supplied to communications equipment designers' individual specifications. These filter units have significant advantages over comparable types designed without the use of Ferroxcube, particularly in the frequency range 300 c/s to 500 kc/s. For audio frequencies the use of Ferroxcube cores permits the winding of compact coils with very high inductances. This results in a considerable reduction in the size and cost of the associated condensers and hence of the filter unit as a whole. The high Q values obtained for a given volume, especially above 10 kc/s, enable sharp cut off characteristics and low pass-band losses to be achieved, while negligible stray flux facilitates the production of compact and mechanically robust filters. Electrical filter units are among a number of high quality components now being made available by Mullard. Full details of the complete series of components will be gladly supplied upon request.

Mullard

'Ticonal' alloy permanent magnets
Magnadur permanent ceramic magnets
Ferroxcube ferro-magnetic cores.

MULLARD LTD · COMPONENTS DIVISION · CENTURY HOUSE · SHAFTESBURY AVENUE · WC2

(M1463A)

WIRELESS ENGINEER

The Journal of Radio Research and Progress

ESTABLISHED 1923

Managing Editor: HUGH S. POCOCK, M.I.E.E. Editor: W. T. COCKING, M.I.E.E.

Technical Consultant: Professor G. W. O. HOWE, D.Sc., LL.D., M.I.E.E.

Editorial Advisory Board:

Professor E. B. MOULLIN, Sc.D., M.I.E.E.; A. H. MUMFORD, O.B.E., B.Sc.(Eng.), M.I.E.E. (G.P.O. Engineering Department); A. R. A. RENDALL, Ph.D., B.Sc., M.I.E.E. (British Broadcasting Corporation); R. L. SMITH-ROSE, C.B.E., D.Sc., Ph.D., M.I.E.E. (Department of Scientific and Industrial Research)

Volume 32 · Number 8

CONTENTS

AUGUST 1955

Editorial: Ultra-Linear Amplifiers **199**

Tunable Temperature-Compensated Reference Cavity
by M. S. Wheeler **201**

Stability of Oscillation in Valve Generators
by A. S. Gladwin, Ph.D., D.Sc. **206**

Active Ladder Network Analysis
by Haim D. Polishuk, M.Sc. **215**

Low-Frequency Crosstalk in Pulse-Phase Modulation
by J. G. Little, B.Sc.(Eng.) **220**

Radiation from Aerials
by Giorgio Barzilai **223**

New Books **226**

Standard-Frequency Transmissions **226**

Abstracts and References. Nos. 2174-2491 .. .. **A.171-A.194**

Published on the fifth of each month

Annual Subscription: Home and overseas £2 7s. 0d.; Canada and U.S.A. $7.50
(*Including Annual Index to Abstracts and References*)

Editorial, Advertising and Publishing Offices: Dorset House, Stamford Street, London, S.E.1

Telephone: Waterloo 3333 (60 *lines*) · *Telegrams: Wirenger, Sedist, London*

BRANCH OFFICES AT BIRMINGHAM · MANCHESTER AND GLASGOW

RECTIFIERS *to meet your* HIGH VOLTAGE *requirements*

XENON RANGE

. . . quick heating-up time . . . freedom from effects of ambient temperature . . . any mounting position . . . suitable for fixed and mobile equipment.

MERCURY VAPOUR RANGE

. . . zirconium coated anode . . . minimum bombardment of cathode . . . extremely long life.

ABRIDGED DATA (All Half-wave Rectifiers)

	Type No.	British Services Type No.	Base	V_f (V)	i_f (A)	P.I.V. Max. (kV)	i_a (pk) Max. (A)	I_a (av) Max. (A)	Ambient Temperature Range (°C)
XENON	RR3—250	CV1835	4-pin UX	2.5	5.0	10 5	1.0 2.0	0.25 0.5	−55 to +75
	RR3—1250	CV2518	B4F	5.0	7.1	10	5.0	1.25	−55 to +70
MERCURY VAPOUR	RG1—240A	CV1626/1072	British 4-pin	4.0	2.7	6.5	1.25	0.25	+10 to +40
	RG3—250	CV1625	Medium Edison Screw	2.5	5.0	10	1.0	0.25	+10 to +40
	RG3—250A	CV32	4-pin UX	2.5	5.0	10	1.0	0.25	+10 to +40
	RG3—1250	CV1629/152	Goliath Edison Screw	4.0	7.0	13	5.0	1.25	+10 to +40
	RG4—1250	CV5	Goliath Edison Screw	4.0	11	13	5.0	1.25	+10 to +40
	* 872A	CV642	B4F	5.0	7.5	10	5.0	1.25	+10 to +40

* Supplied for replacement purposes

Mullard

MULLARD LTD · COMMUNICATIONS AND INDUSTRIAL VALVE DEPARTMENT
CENTURY HOUSE SHAFTESBURY AVENUE LONDON W.C.2

MVT 159

WIRELESS ENGINEER

Vol. 32 AUGUST 1955 No. 8

Ultra-Linear Amplifiers

IN recent years, and particularly in the U.S.A., the so-called ultra-linear amplifier has become popular among quality enthusiasts. A great deal has been written about it and a good many performance figures have been published which do seem to show some reduction of non-linearity distortion as compared with similar triode, tetrode or pentode amplifiers[1]. No serious attempt at explaining why this result should occur seems to have been made, however.

The arrangement is shown in Fig. 1 applied to a single output valve (a pair in push-pull is usually adopted) and it can be seen that it differs from a normal output stage only in that the screen grid is connected to a tapping on the output transformer primary. If this tapping were at the h.t. end of the winding, the screen-grid would be joined to h.t. and the stage would be an ordinary tetrode or pentode one. If it were at the anode end of the winding, the screen-grid would be joined to the anode, and the stage would be a normal triode one.



Fig. 1



Fig. 2

What happens is that a portion of the alternating voltage developed on the anode is fed back to the screen grid and the amount of feedback depends on the position of the tapping on the winding. By varying the amount of feedback, a gradual transition between the limiting triode and tetrode conditions is obtainable. Now a triode is generally thought to be more linear than a pentode and it is sometimes said that this can be accounted for by the linearizing action of feedback. A triode can be regarded as merely a tetrode with 100% feedback to the screen-grid.

If this were all, the ultra-linear stage would represent an intermediate condition between the triode and the tetrode and one would expect it to be less linear than the triode and more linear than the tetrode. On this basis, there is nothing to account for its being more linear than either.

The flaw in this argument is the supposition that the ordinary ideas about negative feedback hold good when they are applied to this special case of feedback to an electrode other than the input electrode. The normal ideas have been developed on the basis of the feedback and the input being applied to a common electrode so that the feedback voltage and the input voltage are additive. It is well known that feedback then always tends to improve the linearity. When separate electrodes are used, however, it can be shown that feedback will introduce curvature into an otherwise straight characteristic.

[1] "Amplifiers and Superlatives" by D. T. N. Williamson [2] P. J. Walker, *Wireless World*, September 1952, p. 387.

A modified form of the ultra-linear amplifier is shown in Fig. 2; in this, a fraction β of the anode voltage is applied through the CR coupling to the suppressor grid. It is well known that in a pentode the cathode current is

$$i_k = a_1 + b_1 V_1$$

within the limits of a linear approximation. It is also well known that it is independent of V_3 which serves only to control the division of current between screen-grid and anode, so that

$$i_a = i_k (a_3 + b_3 V_3)$$

Therefore, we can write

$$i_a = (a_1 + b_1 V_1)(a_3 + b_3 V_3) \quad \ldots \quad (1)$$

In Fig. 2, the anode voltage is $-i_a R_a$, where R_a is the anode load, and so $V_3 = -\beta i_a R_a$, and (1) becomes

$$i_a = \frac{a_3(a_1 + b_1 V_1)}{1 + \beta b_3 R_a (a_1 + b_1 V_1)}$$

$$= A[a_1 + b_1 (1 - a_1 B) V_1 - b_1{}^2 B (1 - a_1 B) V_1{}^2 + b_1{}^3 B^2 (1 - a_1 B) V_1{}^3 \ldots \ldots] \quad \ldots \quad (2)$$

where $A = a_3/(1 + a_1 b_3 \beta R_a)$

and $B = b_3 \beta R_a/(1 + a_1 b_3 \beta R_a)$

Feedback to the suppressor grid thus introduces curvature into an otherwise linear characteristic. If the input V_1 is a sine wave, the anode current will contain all harmonics of it.

Feedback to the screen-grid of a valve is, of course, not quite the same thing as feedback to the suppressor grid. However, as is well known, the mutual conductance does depend upon the screen voltage and so the equation for this condition must be rather like (1); there must be a term involving the product of the control- and screen-grid voltages. If this product term is present, then the equation for screen-grid feedback will be of the same general form as (2).

It would thus appear that feedback to an electrode other than the input electrode is a bad thing. However, we have only so far shown that it makes an otherwise linear stage non-linear. There is the possibility that the kind of non-linearity which it introduces is inverse to that which occurs naturally in valves. If this possibility is a reality, then a critical degree of feedback to screen or suppressor grid would improve the linearity of a stage.

Let us suppose that the input grid has a non-linear action, but the feedback grid is still linear, so that the equation for anode current is

$$i_a = (a_1 + b_1 V_1 + c_1 V_1{}^2 + d_1 V_1{}^3)(a_3 + b_3 V_3)$$

and, as before, $V_3 = -\beta i_a R_a$. Then

$$i_a = \frac{a_3(a_1 + b_1 V_1 + c_1 V_1{}^2 + d_1 V_1{}^3)}{1 + \beta b_3 R_a (a_1 + b_1 V_1 + c_1 V_1{}^2 + d_1 V_1{}^3)}$$

$$= A \frac{a_1 + b_1 V_1 + c_1 V_1{}^2 + d_1 V_1{}^3}{1 + B(b_1 V_1 + c_1 V_1{}^2 + d_1 V_1{}^3)}$$

where A and B have the same values as before. This equation can be expanded to the form

$$i_a = A [a_1 + (b_1 - a_1 B) V_1 - (1 - a_1 B)(b_1{}^2 B - c_1) V_1{}^2 + \{B^2 b_1{}^3 (1 - a_1 B) - B b_1 c_1 (1 - 2 a_1 B) - B(a_1 d_1 + b_1 c_1) + d_1\} V_1{}^3 \ldots]$$

retaining terms only up to the cube.

It is at once evident that it may be possible to choose β so that the coefficient of $V_1{}^3$ is zero. It is not worth while to attempt to work out the condition for this. The equation would be complex and of little practical utility because we have assumed a linear control of anode current by the feedback grid and this is unlikely to be present in practice.

With feedback to a grid other than the signal grid, however, the possibility exists of being able so to adjust the amount of feedback that a particular harmonic can be eliminated from the output. In the ultra-linear amplifier, two valves are used in push-pull so that all even harmonics are, ideally, eliminated.

The third harmonic, which is normally the most important remaining one, can, again ideally, be eliminated by a critical adjustment of feedback to the screen-grids. The distortion present should thus be confined to odd-order harmonics higher than the third. Superficially, therefore, the ultra-linear amplifier would appear to be an improvement on ordinary types. We say superficially because we have not examined the amplitudes of the residual harmonics and the ability to eliminate a third harmonic would confer no benefit if it meant that the higher harmonics became of comparable amplitude.

There is no reason to suppose that this is the case, however, for the evidence of measurement does support the claims made for the ultra-linear amplifier. Our aim here has been merely to show the mechanism by which this improvement is achieved, for we have felt that it has remained too long unexplained.

W. T. C.

TUNABLE TEMPERATURE-COMPENSATED REFERENCE CAVITY

With Separate Tuning and Compensating Mechanisms

By M. S. Wheeler

SUMMARY.—A geometry is proposed for a tunable temperature-compensated microwave cavity having mechanically-separate actions in tuning and in compensation. The compensation is considered first at one frequency where it is shown that, in using practical materials, the compensated frequency change with temperature is non-linear. By the proper choice of such materials, however, the characteristics may be made linear, allowing for greater perfection in frequency compensation. Based on this linear characteristic, the requirements for compensation over a frequency range are derived. An equivalent circuit, which is justified by experimental results, is described giving information about this type of mechanism.

Introduction

FIXED-TUNED frequency reference cavities, having good frequency stability, have been made in production numbers since World War II. The principal example of this type of device is the 1Q* series of 3-cm valves, having a vacuum seal to make atmospheric effects upon frequency negligible and a bimetal temperature compensator to minimize thermal effects. As more and more fixed frequencies are required, it is reasonable to ask if similar precision could be attained in a tunable cavity.

Of the many ways in which it would be possible to achieve this end, engineering compromise may lead one to separate the functions of tuning and temperature compensation, producing the tuning action in a low-sensitivity region of the cavity where relatively large motion is required per Mc/s of temperature compensation. This condition gives the maximum precision of control in tuning but allows for a physically-small compensating mechanism from which only small motions are possible. One might also choose a nosed-in resonator giving small physical size, and freedom from unwanted modes as compared with straight cylindrical geometry. A vacuum envelope is, of course, required because of the importance of atmospheric changes upon frequency.

The major design problem is temperature compensation across the tuning range. But in order to describe the theory of operation, let us first consider a fixed-tuned device, and later find the effects of changing the design frequency.

1. Fixed-Tuned Cavity

It has been shown[1] that if a cavity of resonant frequency f is made of arbitrary geometry of a material having a linear coefficient of expansion, a change in temperature Δt produces a frequency change given by:

$$\Delta f = - \alpha f \, \Delta t \qquad (1)$$

In addition, the cavity may be temperature-compensated by having a frequency-sensitive surface that can be distorted, producing an opposing linear frequency change of R Mc/s per mil† of motion. This action may be produced by a bimetal of temperature coefficients α_1 and α_2 and of effective length l, resulting in a total frequency change given by:

$$\Delta f = - \alpha f \, \Delta t + Rl \, (\alpha_2 - \alpha_1) \, \Delta t \qquad (2)$$

Equation (2) predicts a linear relation between temperature change and the resulting frequency change. By design, then, it would be possible to choose the bimetal length l, for metals of given expansion coefficients, α_1 and α_2, such that Δf would vanish in equation (2). For a fixed frequency device, the compensation would be perfectly accomplished and no frequency change would be observed. It is known, however, that metal expansion is not precisely linear. For the precision required in this case, it becomes necessary to describe more accurately the bimetal behaviour. This is understandable when it is noted that the separate terms in equation (2) amount to about 12 Mc/s for copper devices used at 9,000 Mc/s over 75°C temperature range, and yet we are to ask that the difference remain within a few tenths of a Mc/s of zero.

With this is mind, the temperature coefficients may be expanded in a Taylor series about room temperature:

$$\left.\begin{aligned} \alpha &= \alpha_0 + \beta \, \Delta t + \ldots\ldots \\ \alpha_1 &= \alpha_{01} + \beta_1 \, \Delta t + \ldots\ldots \\ \alpha_2 &= \alpha_{02} + \beta_2 \, \Delta t + \ldots\ldots \end{aligned}\right\} \qquad (3)$$

where the α_0 terms are the normal linear temperature coefficients at room temperature, and the β are second-order‡ coefficients, which are

* The 1Q23 for example is a 9280-Mc/s transmission cavity with a loaded Q of 2000 and 5 db of insertion loss. Frequency change is limited to ± 0·3 Mc/s for a 75°C temperature change.

MS accepted by the Editor, September 1954

† Mil is used in this case as one thousandth of an inch.

‡ Note that β as defined in Equation (3) is twice as great as the 2nd-order coefficient used in some handbooks, such as "Handbook of Chemistry and Physics", 35th edition, Chemical Rubber Publication Company, p. 2835.

usually much smaller than the α_0. If equation (2) is written in differential form with the substitution of two terms of the expansion of equation (3) and the result integrated, one finds upon rewriting in the form of equation (2):

$$\Delta f = -f\left(\alpha_0 + \beta\frac{\Delta t}{2}\right)\Delta t + lR\left(\alpha_{02} + \beta_2\frac{\Delta t}{2} - \alpha_{01} - \beta_1\frac{\Delta t}{2}\right)\Delta t. \quad (4)$$

In this equation, Δf and Δt are again the frequency and temperature change respectively, with respect to room temperature. It may be seen that the frequency shift is no longer linear with the temperature change but it is a quadratic through the origin as illustrated by curve 1 in Fig. 1.

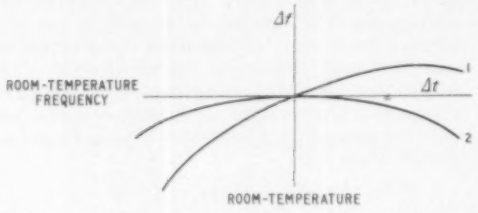

Fig. 1. *Frequency change with temperature:* 1, *General cavity having both* 1*st- and* 2*nd-order error in compensation;* 2, *Cavity having correct* 1*st-order compensation.*

Following the same procedure as before, the bimetal length may be chosen such that the linear terms in equation (4) vanish leaving a quadratic residual:

$$\Delta f = -\beta f\frac{\Delta t^2}{2} + lR\left(\beta_2 - \beta_1\right)\frac{\Delta t^2}{2}, \quad \ldots \quad (5)$$

where

$$l = \frac{f\alpha_0}{R\left(\alpha_{02} - \alpha_{01}\right)} \quad \ldots \quad \ldots \quad \ldots \quad (6)$$

This is symmetrical about room temperature, as shown by curve 2 in Fig. 1. Equation (5) may be written in a more useful form:

$$\Delta f = \frac{\alpha_0\left(\beta_2 - \beta_1\right) - \beta\left(\alpha_{02} - \alpha_{01}\right)}{\alpha_{02} - \alpha_{01}} f\frac{\Delta t^2}{2}. \quad (7)$$

It can be seen that by the proper selection of temperature coefficients, the quadratic residual could also be made to vanish. Thus,

$$\frac{\alpha_0}{\beta} = \frac{\alpha_{02} - \alpha_{01}}{\beta_2 - \beta_1} \quad \ldots \quad \ldots \quad \ldots \quad (8)$$

A useful terminology might be introduced to speak of the linearly-perfect compensation, defined by equation (6), as first-order temperature compensation and the quadratic correction, defined by equation (8), as the second-order temperature compensation. From the above, it can be seen that first-order compensation depends upon cavity dimensions and materials, but that second-order compensation depends only upon the materials used. In practice, one will first choose a combination of metals satisfying equation (8) because there will be no bimetal length which will eliminate the second-order effect. The bimetal length will then be set by equation (6). In a group of production cavities having the normal accumulation of mechanical tolerances, the first-order frequency shift will not be precisely zero, sometimes being slightly positive and sometimes slightly negative. The frequency-temperature relation will then be, as a result, a family of approximately straight lines through the origin.

One interesting result of equation (7), in which correct first-order compensation is assumed, is that the residual frequency change of a copper cavity compensated with, say copper and invar, is identical with the residual frequency change of an invar cavity, compensated with copper and invar. This shows that, except for the fact that first-order compensation is easier to control with a low-expansion cavity, there is no improvement in optimum performance over the higher-expansion cavity compensated with the same materials.

Let us assume, now, that materials for a reference cavity have been properly chosen by equation (8) resulting in a negligible second-order frequency shift over the temperature range that is required of the design. We may then return to the linear frequency-shift equation and inquire what errors are introduced when frequency is added as a variable.

2. Tunable Cavity Requirements

At any one frequency, the device might be compensated perfectly by equation (6) as in any fixed-tuned cavity. Considering this a design centre, then, one might inquire how compensation will change as the valve is tuned away from this point. As described in the introduction, the tuning and compensating mechanisms are being considered separately, so there will be no change in the effective length of the bimetal during tuning. The sensitivity of the cavity to the compensation action, R, however, is a complicated frequency function depending upon cavity dimensions. Using the subscript, 0, to indicate design centre, substitutions in equation (2) give

$$\Delta f = -f\alpha\,\Delta t + \frac{R}{R_0} f_0\alpha\,\Delta t \quad \ldots \quad \ldots \quad (9)$$

where

$$R_0 = \frac{f_0\alpha}{l\left(\alpha_2 - \alpha_1\right)} \quad \ldots \quad \ldots \quad \ldots \quad (10)$$

and R is a frequency function.

The ideal variation of R, then, to give good compensation at all frequencies would be

$$R = \frac{f}{f_0} R_0 \qquad \ldots \quad \ldots \quad \ldots \quad \ldots \quad (11)$$

Considerable experimental work on a modified double-nosed cavity showed that it is possible to choose a cavity geometry that will approximate equation (11) over a 5% or 10% band. Such a design is shown in Figs. 2 and 3. The upper part of the reference cavity containing the compensating mechanism is similar to the 1Q series of fixed-frequency valves[2]; that is, the entire structure, except for the invar centre rod in the upper section, is made of copper and metals having expansion coefficients equal to copper. The invar rod is mounted rigidly at the top of the drawing and flexes the thin copper diaphragm forming the upper radio-frequency boundary of the resonator proper. Frequency compensation is thus achieved by relative motion of the cavity nose and side wall. The frequency sensitivity R of the cavity to this motion is relatively high, so that motion here is limited to the order of one thousandth of an inch for a 75°C temperature change.

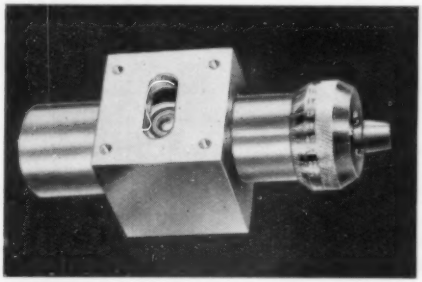

Fig. 2. *Westinghouse experimental tunable reference cavity WX-3339.*

To give mechanical tuning in a region of low-frequency sensitivity, the lower section is moved axially by a screw mechanism acting through a metal bellows. The frequency sensitivity to this motion is relatively low, so that motion here is of the order of a half an inch for a 10% tuning range. The rather specialized geometry of this tuner has been chosen, mostly by trial and error, in a manner to best approximate equation (11) over the design bandwidth. Considerable help may be had, however, in the choice of the tuner geometry by an equivalent circuit consideration which will be given briefly.

3. Tunable Cavity Equivalent Circuit

The frequency variable R is a microwave characteristic of the radio-frequency cavity. It is the rate of change of resonant frequency with respect to small cavity distortion produced by the bimetal in compensation action. Because of the complex cavity geometry, it is impractical to find a field solution for R. An equivalent circuit can be deduced from the appearance of the

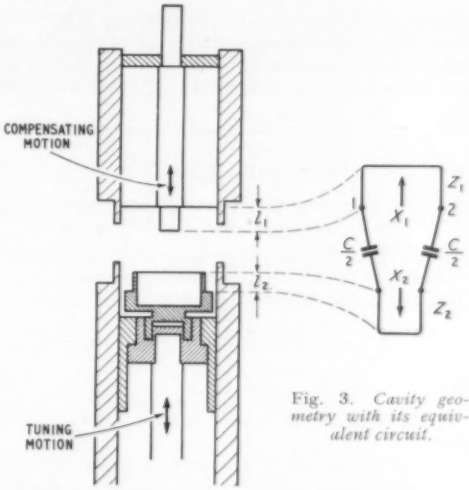

Fig. 3. *Cavity geometry with its equivalent circuit.*

geometry which gives numerical results close to those which are actually measured. As in any equivalent circuit, this is then the justification of its use. Fig. 3 shows that equivalence and defines the circuit constants including two shorted transmission lines of lengths l_1 and l_2 and characteristic impedances Z_1 and Z_2.

An initial feeling for the equivalence of the above circuit and geometry may be had by noting that the upper cavity nose is a short piece of shorted coaxial line. With the lower tuner completely withdrawn, this has a resonant frequency of its own ($\lambda_1 = 4l_1$). This is understandable if it is explained that the circular waveguide section below the nose is cut off to all modes in the tuning range. The lower nose (call it a nose, if you please, from its electrical similarity with the upper nose) also has resonance of its own ($\lambda_2 = 4l_2$) which is independent of the tuner position. This is similarly a shorted length of coaxial line having a lower characteristic impedance than the upper section and generally a slightly lower resonant wavelength. The large hole in the centre of the lower nose is below cut off for all modes and contributes only to C, the nose-to-nose capacitance. In compensation, the action of the bimetal alters the position of the upper nose by flexing a diaphram in the upper wall. Predominantly, this is equivalent to a change in the line length. In addition, but to a

lesser order, the motion of the upper nose changes the nose-to-nose capacitance. The frequency sensitivity, then, is given by the sum of these two effects.

$$R = \frac{df}{dm} = \frac{\delta f}{\delta l_1}\frac{dl_1}{dm} + \frac{\delta f}{\delta C}\frac{dC}{dm} \quad \ldots \quad \ldots \quad (12)$$

where m is linear motion of the upper nose.

To derive R, one first writes an expression for resonance of the entire system by equating the susceptance at the terminals (1, 2) Fig. 3 to zero.

$$B_{12} = \frac{1}{x_1} + \frac{1}{x_2 - 1/\omega C} = 0 \quad \ldots \quad \ldots \quad (13)$$

Solving for the resonant angular frequency;

$$\omega = 1 \Big/ \left[C \left\{ Z_1 \tan \frac{\omega l_1}{v} + Z_2 \tan \frac{\omega l_2}{v} \right\} \right] \quad (14)$$

Here ω is the angular frequency and v is the wave velocity in the shorted transmission lines.

The two required partial derivatives of ω are

$$\frac{\delta\omega}{\delta l_1} = \frac{\omega Z_1}{v} \frac{\sec^2 \frac{l_1\omega}{v}}{C\left(Z_1 \tan \frac{l_1\omega}{v} + Z_2 \tan \frac{l_2\omega}{v}\right)^2 + \frac{l_1 Z_1}{v}\sec^2\frac{l_1\omega}{v} + \frac{l_2 Z_2}{v}\sec^2\frac{l_2\omega}{v}} \quad \ldots \quad \ldots \quad \ldots \quad (15)$$

and

$$\frac{\delta\omega}{\delta C} = \frac{-\left(Z_1 \tan \frac{l_1\omega}{v} + Z_2 \tan \frac{l_2\omega}{v}\right)}{C^2\left(Z_1 \tan \frac{l_1\omega}{v} + Z_2 \tan \frac{l_2\omega}{v}\right)^2 + C\left(\frac{l_1 Z_1}{v}\sec^2\frac{l_1\omega}{v} + \frac{l_2 Z_2}{v}\sec^2\frac{l_2\omega}{v}\right)} \quad \ldots \quad \ldots \quad \ldots \quad (16)$$

The equivalent circuit capacitance, C, is considered to be variable to give the mechanical tuning of the device just as tuner motion varies the nose-to-nose capacitance in the actual cavity without affecting the line lengths. It is convenient, however, to use wavelength, λ_0, as the independent variable in these equations and eliminate capacitance with the aid of equation (14). This gives

$$\frac{\delta\omega}{\delta l_1} = \frac{4\pi^2 v}{{\lambda_1}^2} \frac{\left(\frac{\lambda_1}{\lambda_0}\right)^2 \sec^2\left(\frac{\lambda_1}{\lambda_0}\frac{\pi}{2}\right)}{\left\{\tan\left(\frac{\lambda_1}{\lambda_0}\frac{\pi}{2}\right) + \frac{\lambda_1}{\lambda_0}\frac{\pi}{2}\sec^2\left(\frac{\lambda_1}{\lambda_0}\frac{\pi}{2}\right)\right\} + \frac{Z_2}{Z_1}\left\{\tan\left(\frac{\lambda_2}{\lambda_0}\frac{\pi}{2}\right) + \frac{\lambda_2}{\lambda_0}\frac{\pi}{2}\sec^2\left(\frac{\lambda_2}{\lambda_0}\frac{\pi}{2}\right)\right\}} \quad \ldots \quad \ldots \quad (17)$$

and

$$\frac{\delta\omega}{\delta C} = \frac{4\pi^2 v^2 Z_1}{{\lambda_1}^2} \frac{-\left(\frac{\lambda_1}{\lambda_0}\right)^2 \left\{\tan\left(\frac{\lambda_1}{\lambda_0}\frac{\pi}{2}\right) + \frac{Z_2}{Z_1}\tan\left(\frac{\lambda_2}{\lambda_0}\frac{\pi}{2}\right)\right\}}{\left\{\tan\left(\frac{\lambda_1}{\lambda_0}\frac{\pi}{2}\right) + \frac{\lambda_1}{\lambda_0}\frac{\pi}{2}\sec^2\left(\frac{\lambda_1}{\lambda_0}\frac{\pi}{2}\right)\right\} + \frac{Z_2}{Z_1}\left\{\tan\left(\frac{\lambda_2}{\lambda_0}\frac{\pi}{2}\right) + \frac{\lambda_2}{\lambda_0}\frac{\pi}{2}\sec^2\left(\frac{\lambda_2}{\lambda_0}\frac{\pi}{2}\right)\right\}} \quad \ldots \quad (18)$$

The two parts of equation (12) should be discussed separately. It was indicated that the first member $\frac{\delta f}{\delta l_1}\frac{dl_1}{dm}$ was the first-order term and practice finds this so. In fact, the second-order term vanishes at one extreme of the tuning range. In the first term, $\frac{dl_1}{dm}$ is constant and would appear to be about 1/2 from inspection of the compensating mechanism. That is, motion of the bimetal mechanism effectively increases the outside diameter of the coaxial line but not that of the centre conductor. Measurements on a Westinghouse experimental valve, WX-3339, show the constant to be close to 1/3. The variable factor in the first-order term, $\delta f/\delta l_1$, with two arbitrary parameters, λ_1/λ_2 and Z_2/Z_1, may be plotted, giving families of curves as shown in Figs. 4 and 5.

That the first-order term is the type of relation required to minimize equation (9) is demonstrated from equation (17). Consider the two lines to be of equal length and the tuning range limited to the asymptotic region where the tangent terms become negligible and the secant terms approach unity. This is typical of the characteristics shown in Fig. 5. Equation (17) reduces to

$$\frac{\delta\omega}{\delta l_1} = \frac{4\pi^2 v}{{\lambda_1}^2} \frac{\lambda_1/\lambda_0}{\pi/2\,(1 + Z_2/Z_1)} \quad \ldots \quad \ldots \quad (19)$$

This shows that compensation rate, R, is proportional to frequency, which is all that is required by equation (11).

The second-order term, then, should be looked upon as a source of error and something to minimize. This is the reason for the large cup in the centre of the WX-3339 tuner nose. It can be seen from physical reasoning that this would reduce, to a large extent, the rate of change of

capacitance with respect to compensating motion. To get a quantitative measure of this error term is not so simple as in the case of the first-order term. The difficulty is that, unlike the first-order term, the total derivative is not constant. In fact, calculation shows it to be the principal variable in the second-order term and like the total derivative in the first-order term, this factor is not obtainable from the equivalent circuit. If it becomes necessary to know the rate of change of capacitance with respect to compensating motion, quantitatively, it can be determined by measurement of resonant frequency with respect to tuner position. It is noticed that, with the geometrical arrangement shown in Fig. 3, an increment of compensating motion has an identical effect upon the capacitance as the same increment of tuner motion. The rate of change of capacitance with respect to tuner motion could then be calculated from the resonant frequency versus tuner position characteristic with the help of equation (14).

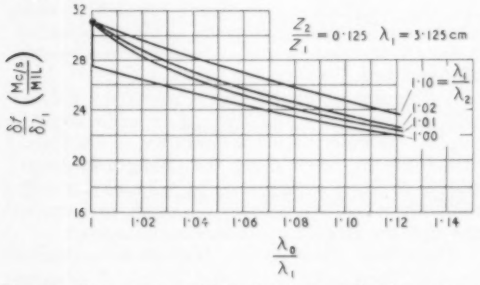

Fig. 4. *Frequency sensitivity for constant line impedance.*

4. Experimental Results

It is found experimentally that the inclusion of the second-order term in the compensation formula equation (7) is well justified. The second-order residual may be predicted to within 10% or 20% from hand-book values of expansion coefficients. With the proper choice of materials to minimize to second-order error, the compensation sensitivity (R Mc/s per mil) has been measured mechanically over a 10% tuning range in the 3-cm band. This predicted a cavity with no frequency shift at the design centre and a maximum of 0·5 Mc/s for 75°C temperature rise at two frequency extremes. Actual temperature measurements justified this calculation to within 15%. Of course, over a smaller tuning range a corresponding improvement can be made in the temperature compensation. It is likely that this does not represent optimum performance, although this result comes from a year's search for the preferred tuner nose geometry.

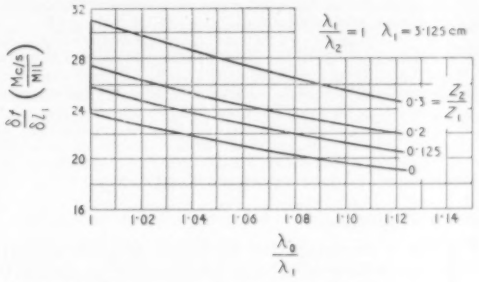

Fig. 5. *Frequency sensitivity for equal nose lengths.*

Finally, it is found that, if dl_1/dm and dC/dm are obtained by measurement (it has been explained that they are not derivable from the equivalent circuit) and used to calculate the frequency sensitivity by equation (12), this result agrees with measurements to within 5% over the higher-frequency half of a 10% tuning range. Best agreement over this half of the tuning range should be expected because in this region the two noses are physically well separated, avoiding as much as possible higher-order waves on the short transmission lines.

Acknowledgment

Curve plotting for this paper was done by Miss S. Hamalian and some of the experimental results were obtained by E. R. Mittelman of the Westinghouse Electron Tube Division.

REFERENCES

[1] C. G. Montgomery, "Technique of Microwave Measurements", Radiation Laboratory Series Vol. 11, p. 384.

[2] R. R. Read and M. S. Wheeler, "A Microwave Frequency Standard for Radar Applications", *Tele-Tech*, December 1949, p. 26.

STABILITY OF OSCILLATION IN VALVE GENERATORS

By A. S. Gladwin, Ph.D., D.Sc.

(*University of Sheffield*)

SUMMARY.—A comprehensive theory of stability is developed which is applicable to a large class of harmonic oscillators. The paper is concerned mainly with the 4-terminal regenerative type of oscillator with grid-leak bias but the analysis applies also to circuits with fixed grid-bias and to 2-terminal oscillators. All known forms of instability appear as special cases of the general theory and some new forms are predicted.

Stability is determined by the nature of the roots of a characteristic equation and stability criteria are obtained in the form of inequalities between the parameters of the amplifier and feedback network. A modified form of Nyquist locus-diagram can also be used. When the feedback network is symmetrical with respect to the oscillation frequency the characteristic equation can be factorized to give independent criteria for frequency and amplitude stability.

Hysteresis effects and periodic instability are analysed in detail. In addition to the general treatment, specific forms of the various parameters which appear in the stability criteria are worked out for a three-halves-law amplifier with a semi-linear or exponential grid-current characteristic. Quantitative experimental confirmation is provided.

1. Introduction

THIS investigation concerns the dynamical stability of free oscillations in generators producing a nearly-sinusoidal voltage waveform (harmonic oscillators) and is limited to those types known as 'separable' oscillators, which consist of a non-linear amplifier or resistance whose behaviour is independent of time, and a passive linear impedance network. Under certain conditions the frequency or amplitude of oscillation may become unstable and change to a new value or vary over a range of values. The object of this inquiry is to elucidate these conditions in their most general form.

Over the past 35 years the subject has attracted much attention. Early work on discontinuous amplitude changes was carried out by Appleton and van der Pol[1] and by Greaves[2]. Van der Pol also studied a form of discontinuous frequency instability[3]. Accounts of later work are given in recent publications[4–8].

All the early work, and most of the later, dealt with simple types of circuits, and it was usually assumed that the behaviour of the amplifier or non-linear resistance could be represented by a few terms of a power series. It was also supposed that the working point of the amplifier was independent of oscillation amplitude; i.e., the non-oscillatory part of the voltage wave was of fixed amplitude.

In modern oscillators the amplifier characteristic can seldom be represented by a low-degree polynomial. Moreover, grid-leak bias or some other form of amplitude control is invariably used. This causes the amplifier working point to vary with oscillation amplitude and may also give rise to a periodic instability sometimes known a 'squegging'.

MS accepted by the Editor, August 1954

Van Slooten[9, 10] examined this type of instability by setting up a second-order differential equation for the oscillation amplitude, stability being determined by the roots of the auxiliary equation. A simple form of circuit and valve characteristic was assumed.

A different approach was proposed by Edson[11] who suggested that the Nyquist criterion could be applied to determine the stability of oscillation amplitude by considering the changes in magnitude and phase experienced by a small sinusoidal modulation of the amplitude when transmitted through the amplifier and feedback network.

These two methods are limited to oscillators having feedback networks with a response characteristic symmetrical about the oscillation frequency; e.g., a high-Q antiresonant circuit. In asymmetrical networks, amplitude changes are accompanied by frequency changes which the methods are unable to take into account. Other suggestions, some of which are considered later, have been put forward. An account of these can be found in Edson's book[12].

In their different ways all the methods so far proposed are restricted in scope, and the diversity of treatment obscures the fundamental unity of all forms of instability. The piecemeal treatment also suggests that there may exist types of instability hitherto overlooked. A new and more general theory seems desirable which would include all possible types of instability as special cases and be applicable to any kind of network or amplifier. It should also be possible to obtain numerical results for practical oscillators without having to make violent assumptions and drastic approximations. This would allow a theoretical and experimental check to be made on the validity of any proposed stability criterion.

2. List of Symbols

$A(p)$ = Amplitude stability function. See (8.2)
b_a, b_g = Constants of the valve. See (4.19) and (4.21)
$D(p)$ = Stability function for the oscillator. See (6.4)
$F(p)$ = Frequency stability function. See (8.2)
G_n = Fourier coefficients of the grid–anode transconductance. See (5.10)
H = $1 - K + K/Y$
i_a, i_g = Anode and grid currents
i_{a1}, i_{g1} = Anode and grid currents of fundamental frequency
i_{ad}, i_{gd} = Perturbations of anode and grid currents
k = Fraction of total current reaching the anode
K = $-V_g/V_{g1} \mid 1 + Z_I/\mu Z_T \mid$
N = Parameter of the steady state. See (4.13) and (4.14)
p = $a + j\omega_d$, complex frequency
q = $\exp j\theta$
R_a, R_g = Anode and grid circuit d.c. resistances
r_g = Grid input resistance at fundamental frequency
S_n = Fourier coefficients of the grid input conductance. See (5.1)
u_n = Complex amplitudes of transient grid voltage components. See (5.2)
v_a, v_{a1} = Anode voltage, anode voltage of frequency ω_0.
V_e = Amplitude of equivalent grid voltage of frequency ω_0. See (4.5)
v_g, V_g = Grid voltage, mean grid voltage
v_{g1}, V_{g1} = Grid voltage and amplitude of grid voltage at frequency ω_0
v_{ad}, v_{gd} = Perturbations of anode and grid voltages
V_{ca}, V_{cg} = Grid voltages required to cut off anode and grid currents
Y = V_g/V_{ca}
Z_i, Z_0, Z_t = $R_i + jX_i$, etc. Open-circuit input, output and transfer impedances of the feedback network at frequency ω_0
Z_I, Z_θ, Z_T = Modified values of Z_i, etc. See (4.11)
Z_i^+, Z_i^0, Z_i^- = $Z_i(p + j\omega_0)$, $Z_i(p)$, $Z_i(p - j\omega_0)$, etc.
Z_E = $R_E + jX_E = (Z_T + Z_I/\mu)/(1 - kZ_T/r_g)$
θ = Phase angle between cathode current and grid voltage
μ = Amplification factor of the valve
ω_0 = Oscillation frequency. (Fundamental)
$*$ = Complex conjugate value

3. Method of Solution

The method consists in examining the stability of the possible steady states of the oscillator. By a 'possible steady state' is meant a condition in which the system is in equilibrium with a periodic wave of constant amplitude and frequency. Stability is determined by the nature of the disturbance produced when a possible steady state is momentarily perturbed by a small external force, equilibrium being stable if the amplitude of the disturbance decreases with time. If equilibrium is stable, the possible steady state may be an actual steady state but, if equilibrium is unstable, the possible steady state cannot be realized physically.

When the disturbance is small the oscillator behaves towards it like a linear network with time-varying parameters. Now the transients in any linear system can be represented as the sum of a number of independent normal modes and to find the form of these modes in an oscillator it is sufficient to consider the simplest example.

Suppose that the oscillator consists of a 2-terminal linear passive network with an admittance $Y(D)$, $(D = d/dt)$, connected across a suitable non-linear negative-resistance element having a current–voltage relation given by $i = f(v)$. Let ω_0 be the frequency of oscillation and let the steady-state oscillation voltage across the network and non-linear resistance be v_s. If a small disturbance v_d is added to v_s the current in the non-linear resistance becomes $f(v_s + v_d) = f(v_s) + v_d f'(v_s)$. The current due to v_d is therefore $i_d = v_d f'(v_s)$. Since v_s is periodic $f'(v_s)$ is also periodic, and i_d can therefore be written as $i_d = g v_d$, where

$$g = \sum_0^\infty g_r \cos(r\omega_0 t + \phi_r) \quad \ldots \quad \ldots \quad (3.1)$$

Thus the non-linear resistance behaves towards v_d like a linear resistance with a conductance g varying periodically at the oscillation frequency.

By Kirchhoff's law the current flowing into the linear network is equal and opposite to the current entering the non-linear resistance, since the total currents at the branch points must be zero. But the network current due to v_d is $Y(D)v_d$. Hence

$$Y(D)v_d = -g v_d \quad \ldots \quad \ldots \quad \ldots \quad (3.2)$$

In a linear network with constant parameters the general transient is the sum of a number of elementary waves each of the form $\exp.(at) \cos(\omega_d t + \theta)$. Inspection of (3.1) and (3.2) shows that the elementary transient in an oscillator must be different from this, for although the current in the linear network would be of the same form, modified only in amplitude and phase, the current $g v_d$ in the non-linear resistance would be the sum of an infinite number of waves of different frequencies. The inspection also suggests that a possible solution might be

$$v_d = \exp.(at) \sum_{-\infty}^{\infty} V_n \cos\left\{(n\omega_0 + \omega_d)\, t + \theta_n\right\} \quad \ldots \quad \ldots \quad \ldots \quad (3.3)$$

The currents in both linear and non-linear branches would then have components of all the frequencies $n\omega_0 + \omega_d$, and by choosing suitable values for the coefficients in (3.3) these currents could be made equal and opposite to satisfy (3.2).

From the analytical point of view, $Y(D)$ is a rational function of D and so (3.2) is a linear differential equation with periodic coefficients. Floquet's theory of such equations[16] shows that the solutions are of the form (3.3). Solutions in which $n\omega_0$ is replaced by $nk\omega_0/m$, k and m being integers, are also theoretically possible but it can be shown that these require exact relations between

the coefficients g_r and must therefore be excluded on physical grounds.

Equation (3.3) represents the terminal voltage of one transient normal mode but equation (3.2) can usually be satisfied for more than one value of a and ω_d. The general disturbance can therefore be represented as the sum of a set of normal-mode voltages each similar to (3.3). In the more convenient complex notation (3.3) becomes

$$v_d = V_d \sum_{-\infty}^{\infty} u_n \exp.\,(p + jn\omega_0)\,t \qquad (3.4)$$

where $p = a + j\omega_d$ and the coefficients u_n are complex numbers. The actual voltage is the real part of this expression. With each normal mode is associated a characteristic complex frequency p, and the criterion for stability is therefore that all possible values of p should have negative real parts since this ensures that v_d ultimately vanishes.

By writing $n + m$ for n in (3.4) it is seen that if p is a solution then so is $p + jm\omega_0$, m being any integer. The imaginary part of p may therefore be restricted to the range $-\frac{1}{2}\omega_0 < \omega_d < \frac{1}{2}\omega_0$. Also, by writing $-n$ for n it follows that if p is a solution then so is p^* (complex conjugate).

To calculate p, the sums of the currents of like frequencies in the network and non-linear resistance are equated to zero. At any particular (complex) frequency $p + jq\omega_0$, the current in the linear network has the (complex) amplitude $V_d u_q Y\,(p + jq\omega_0)$, but the current in the non-linear resistance depends on all the values of $V_d u_n$, and, in fact, may easily be shown to have the (complex) amplitude

$$\tfrac{1}{2}\sum_{r=0}^{\infty} g_r \left\{ u_{q+r} \exp.\,(-j\phi_r) + u_{q-r} \exp.\,(j\phi_r) \right\}.$$

So, corresponding to every value of q is an equation containing all the values of u_n. Thus an infinite set of linear simultaneous equations for the unknowns u_n is obtained, the coefficients of u_n being functions of p and the quantities g_r and ϕ_r. When these equations are written in canonical form the condition for compatibility[18] is that the infinite determinant formed by the coefficients should vanish. This gives a determinantal equation from which the values of p could in principle be calculated. The equation is a more general form of Hill's determinantal equation[17]. However, to make the calculation practicable the equation must be simplified.

In many oscillators the steady-state voltage is nearly sinusoidal because the network impedance at the harmonic frequencies is very small. In calculating the transient behaviour it is therefore permissible to neglect all terms associated with harmonic frequencies. This means that the expression for v_d can be restricted to three terms

$$v_d = V_d \sum_{-1}^{1} u_n \exp.\,(p + jn\omega_0)\,t \;\ldots \qquad (3.5)$$

Only the first three terms in the Fourier series (3.1) for g need then be taken into account and the infinite determinant is reduced to its three central rows and columns. (A similar approximation was used by Hill in the solution of an astronomical problem.)

When (3.5) is adopted, the previously-noted restriction on the range of ω_d becomes obligatory in order to confine the transient frequencies to the appropriate range.

For regenerative oscillators of the type shown in Fig. 1 (which are the main subject of the paper) the procedure is similar but the algebra is naturally more complicated. The amplifier has input, output, and transfer conductances each of the form (3.1) and three functions are needed to specify the performance of the feedback network, namely, the open-circuit input impedance Z_i between terminals 1 and 3, the open-circuit output impedance Z_0 between 2 and 3, and the open-circuit transfer impedance Z_t between 1–3 and 2–3.



Fig. 1. *Oscillator circuit.*

Both anode and grid transient voltages are of the form (3.5), and since the input and output currents and voltages of the amplifier are related through the network impedances, all currents and voltages can be expressed in terms of a single variable—the amplifier input (grid) voltage.

For simplicity, the power supplies and the grid-bias arrangement are not shown in Fig. 1, and a triode is depicted although the analysis applies equally to tetrodes and pentodes. The values of Z_i and Z_0 for d.c. are taken as R_a and R_g, and these will usually be equal to the h.t. decoupling resistance and the grid-leak resistance. Z_t is zero for d.c.; i.e., there is no path for d.c. between anode and grid except via the cathode terminal.

Before stability can be investigated the possible steady states of the oscillator must be calculated.

4. Steady-State Amplitude and Frequency

The method used here is an extension of a previous analysis [19] and the general procedure—sometimes known as the method of equivalent linearization—is to consider only the constant and fundamental-frequency components of the currents and voltages. When, as is usual, the amplifier input voltage is nearly sinusoidal the method yields a good approximation even when the currents are markedly non-sinusoidal.

The grid–cathode voltage is first considered. Let this be

$$v_g = V_{g1} \cos \omega_0 t + V_g \quad .. \quad .. \quad (4.1)$$

V_g is the grid-bias voltage which may be derived either from a fixed source of e.m.f. or from the flow of grid current through the grid-leak resistance R_g. The second arrangement is examined first. If the anode voltage is not too small or does not vary too greatly, the grid current is well approximated by a single-valued function of v_g only

$$i_g = e\,(v_g).$$

When v_g is periodic i_g is also periodic. Thus

$$i_g = I_g + I_{g1} \cos \omega_0 t + \text{etc.}$$

The constant component I_g flows through R_g to produce the bias voltage. If all the bias is produced in this way Fourier analysis gives

$$V_g = -I_g R_g = -(R_g/\pi) \int_0^\pi e\,(V_{g1} \cos x + V_g)\,dx \quad (4.2)$$

For any given value of V_{g1} this is an equation for V_g. Since i_g has harmonic components, the assumption that v_g is sinusoidal implies that R_g is shunted by a capacitor of suitable size.

Due to the flow of grid current the amplifier has an a.c. input resistance r_g given by the ratio of the fundamental components of grid voltage and current. Thus

$$V_{g1} = r_g I_{g1} = (2r_g/\pi) \int_0^\pi e\,(V_{g1} \cos x + V_g) \cos x\,dx \quad (4.3)$$

from which r_g may be determined. If the function $e\,(v_g)$ is such that V_g is proportional to V_{g1} then r_g is constant and conversely. When the bias voltage is obtained from a fixed source and is sufficient to prevent the flow of grid current, $r_g = \infty$. When the fixed bias voltage is insufficient to stop grid current r_g is still given by (4.3), but (4.2) is not then valid.

To calculate the anode current i_a it is assumed that the cathode current i_k is a function of $v_g + v_a/\mu$, v_a being the anode–cathode voltage and μ a constant. For a triode $i_a = i_k - i_g$ and for multigrid valves i_a is usually a fairly constant fraction of this. Thus in all cases

$$i_a = f\,(v_g + v_a/\mu) - ki_g$$

where $f\,(v)$ is a single-valued function of v. For triodes $k = 1$ and for many pentodes $k \approx 0{\cdot}8$. It is more convenient to write

$$i_a = f\,(v_g + v_{aa}/\mu - V_{ca}) - ki_g \quad .. \quad (4.4)$$

where v_{aa} is the alternating component of v_a, and V_{ca} depends on the mean anode voltage. If the anode circuit contains a decoupling resistance, V_{ca} will vary with the oscillation amplitude. This is discussed in Appendix 3. Meanwhile V_{ca} is assumed to be constant.

The alternating anode voltage is assumed to be sinusoidal.

Let

$$v_g + v_{aa}/\mu = V_g + V_e \cos\,(\omega_0 t + \theta) \quad (4.5)$$

Then

$$i_a = f\,\{V_e \cos\,(\omega_0 t + \theta) + V_g - V_{ca}\} - ki_g \quad (4.6)$$

Let $K = -V_g/V_e$ and $Y = V_g/V_{ca}$. By Fourier analysis the component of i_a of fundamental frequency is

$$i_{a1} = gh\,(K,Y)\ V_e \cos\,(\omega_0 t + \theta) - kV_{g1} \cos \omega_0 t/r_g \quad (4.7)$$

where

$$V_e gh\,(K,Y) = (2/\pi) \int_0^\pi f\,(V_e \cos x + V_g - V_{ca}) \cos x\,dx \quad (4.8)$$

g is an arbitrary positive constant having the measure of conductance which can be chosen to give a suitable scale for the function $h\,(K,Y)$.

The actual currents and voltages are now replaced by their complex amplitudes, the reference quantity being the grid alternating voltage. Using the same symbols as for the real voltages (4.7) becomes

$$i_{a1} = (v_{g1} + v_{a1}/\mu)\,gh\,(K,Y) - kv_{g1}/r_g \quad (4.9)$$

Now in the impedance network of Fig. 1 the currents and voltages are connected by the following relations:

$$\left.\begin{aligned} i_{g1} &= v_{g1}/r_g \\ i_{a1} &= -v_{g1}/Z_t - i_{g1}Z_0/Z_t = -v_{g1}\,(1 + Z_0/r_g)/Z_t \\ v_{a1} &= v_{g1}Z_i/Z_t + Z_n i_{g1} = v_{g1}\,(Z_i/Z_t + Z_n/r_g) \end{aligned}\right\} \quad (4.10)$$

where $Z_n = Z_i Z_0/Z_t - Z_t$

Suppose that the network is modified by connecting a resistance r_g between 2 and 3. The new network could be replaced by a three-element network similar to the original but with modified values for the elements. Denoting the new elements by $Z_I\ Z_\theta\ Z_T$

$$\left.\begin{aligned} Z_I &= Z_i - Z_t^2/(r_g + Z_0) = (Z_i + Z_n Z_t/r_g)/(1 + Z_0/r_g) \\ Z_\theta &= Z_0/(1 + Z_0/r_g) \\ Z_T &= Z_t/(1 + Z_0/r_g) \\ Z_N &= Z_I Z_\theta/Z_T - Z_T = Z_n \end{aligned}\right\} \quad (4.11)$$

It is noted that $Z_\theta/Z_T = Z_0/Z_t$, and if $Z_n = 0$ then also $Z_I/Z_T = Z_i/Z_t$.

From (4.10) and (4.11), $i_{a1} = -v_{g1}/Z_T$ and $v_{a1} = v_{g1}Z_I/Z_T$.

Substituting these into (4.9) gives

$$1 = -gh\,(K,Y)\,(Z_T + Z_I/\mu) + kZ_T/r_g$$

and finally putting

$$Z_E = (Z_T + Z_I/\mu)/(1 - kZ_T/r_g) \qquad (4.12)$$

gives

$$1 = -gh\,(K,Y)\,Z_E$$

This is the equation defining the steady state. Writing $Z_E = R_E + jX_E$, and similarly for Z_I and Z_T, and equating separately the real and imaginary parts of the equation gives

$$1 = Nh\,(K,Y) \qquad (4.13)$$

where

$$N = -gR_E = -g\,(R_T + R_I/\mu)/(1 - kR_T/r_g) \qquad (4.14)$$

and $$X_E = 0$$

$$\text{or } X_T + X_I/\mu + k\,(R_I X_T - R_T X_I)/\mu r_g = 0 \qquad (4.15)$$

If $f\,(v)$ is an increasing function of v then from (4.8) $gh\,(K,Y)$ is always positive. Hence R_E and so also R_T must be negative.

Equation (4.14) gives the amplitude, and (4.15) the frequency of oscillation but the equations are not completely independent. r_g will usually vary more or less with the oscillation amplitude and μ and k may also vary slightly. The frequency of oscillation will generally be affected by all these changes. For the frequency to be independent of amplitude and of changes in the amplifier it is necessary that Z_i, Z_0 and Z_t should be entirely resistive at the frequency ω_0. If this condition is satisfied (4.11) shows that $X_T = X_I = 0$ whatever the value of r_g and the frequency equation (4.15) is then independent of μ, k and r_g.

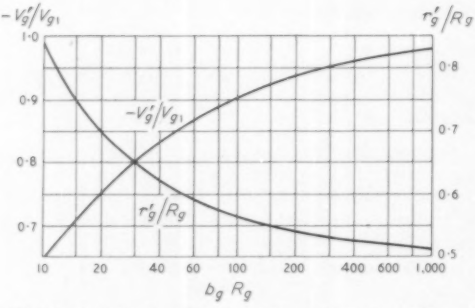

Fig. 2. *Grid bias and grid resistance of diode rectifier.*

In simple oscillators only one frequency is possible but, with more complicated networks, two or more values of ω_0 may be found to satisfy (4.15). These values will be frequencies of possible steady states only if corresponding values of Y can be found to satisfy the amplitude equation (4.14).

The parameters K and θ are found as follows. When expressed in complex form the voltage $V_e \cos(\omega_0 t + \theta)$ has an amplitude $V_e \exp. j\theta$. On comparing (4.7) and (4.9) it is seen that $V_e \exp. j\theta = v_{g1} + v_{a1}/\mu = v_{g1}\,(1 + Z_I/\mu Z_T)$. Hence, by taking the modulus of both sides,

$$K = -V_g/V_e = -V_g/V_{g1}\,|\,1 + Z_I/\mu Z_T\,| \qquad (4.16)$$

Also

$$\left.\begin{aligned} &\text{exp. } j\theta = (1 + Z_I/\mu Z_T)/|\,1 + Z_I/\mu Z_T\,| \\ &\text{and} \\ &\text{exp. } -j\theta = (1 + Z_I^*/\mu Z_T^*)/|1 + Z_I/\mu Z_T| \\ &\qquad \text{(complex conjugate value)} \end{aligned}\right\} (4.17)$$

When Z_T is resistive Z_I must also be resistive [from (4.15)].

Then $$K = -V_g/V_{g1}\,(1 + R_I/\mu R_T) \text{ and } \theta = 0 \qquad (4.18)$$

To obtain working formulae, particular forms of the functions $e\,(v_g)$ and $f\,(v)$ must be studied. The process of solution will therefore be illustrated with reference to those forms which occur most often in practice. Details of the calculations are given in Appendix 1. The results are as follows.

It is first assumed that the grid-bias voltage is obtained by a grid-leak and capacitor arrangement. When the oscillation amplitude is fairly large grid current flows mainly when v_g is positive, and if the minimum anode voltage is well above the maximum grid voltage a fair approximation to i_g is

$$\left.\begin{aligned} i_g = e\,(v_g) &= b_g\,(v_g - V_{cg}) \text{ when } v_g > V_{cg} \\ &= 0 \qquad\qquad\quad \text{when } v_g \leqslant V_{cg} \end{aligned}\right\} (4.19)$$

b_g and V_{cg} are measurable constants. Then

$$\left.\begin{aligned} V_g &= V_g'\,(1 - V_{cg}/V_{g1}) \\ r_g &= r_g'\,(1 + V_{cg}/V_{g1}) \end{aligned}\right\} (4.20)$$

These formulae are valid for small values of V_{cg}/V_{g1}. Fig. 2 shows $-V_g'/V_{g1}$ and r_g'/R_g as functions of $b_g R_g$. These are the familiar curves for the diode rectifier.

When the amplifier operates in the space-charge-limited condition the cathode current follows a three-halves power law

$$\left.\begin{aligned} f\,(v) &= b_a v^{3/2} \text{ when } v > 0 \\ &= 0 \qquad\quad \text{when } v \leqslant 0 \end{aligned}\right\} (4.21)$$

with $$v = V_e \cos(\omega_0 t + \theta) + V_g - V_{ca}$$

b_a is a constant and V_{ca} is the grid voltage required to reduce the anode current to zero when the anode voltage is constant. The quantity g in (4.7) is taken as

$$g = 1\tfrac{1}{2} b_a\,(-V_{ca})^{\frac{1}{2}}$$

Then $$N = -1\tfrac{1}{2} b_a\,(-V_{ca})^{\frac{1}{2}} R_E \qquad (4.22)$$

Fig. 3 shows N as a function of K and Y calculated from (4.8).

To find the amplitude and frequency of oscillation approximate values of V_g/V_{g1} and r_g are found from Fig. 2 by neglecting V_{cg}. Z_I and Z_T are then calculated and ω_0 is found by solving

(4.15). K and N can next be evaluated from (4.16) and (4.22) and finally Y is read off from Fig. 3. A value for V_{g1} is thus obtained from which V_{cg}/V_{g1} can be found, and by repeating the procedure, taking V_{cg} into consideration, better approximations for V_{g1} and ω_0 can be obtained.

The results will be correct only if the expressions for i_a and i_g are valid. Slight departures from the three-halves law at low currents produce little error, but large deviations may occur if the minimum anode voltage approaches the 'knee' in a pentode or is comparable with the maximum grid voltage in a triode.

Large amplitudes require a small value of K, but good regulation is obtained when K is large; i.e., the change of amplitude with load is small. Large values of R_g and small values of μ give large values of K. Since $f(v) = 0$ when $v < 0$ it follows from (4.7) and (4.8) that $V_e + V_g - V_{ca} > 0$ for otherwise the anode current would always be zero. Dividing through by V_e the inequality becomes $1 - K + K/Y > 0$. Hence if $K > 1$ the upper limit of Y is $K/(K-1)$ when the grid current is negligibly small. However the three-halves law would almost certainly not be followed for these extreme values. Other features of the graphs are discussed in later Sections.

When the grid-bias voltage is obtained from a fixed source and is large enough to stop the flow of grid current Fig. 3 can again be used to find V_{g1}. Y is now a constant, N can be evaluated as before and the corresponding value of K read off from the graphs. V_{g1} follows from K.



Fig. 3. *Graphs for oscillation amplitude.*

If the grid-bias voltage is fixed but insufficient to stop grid current a direct solution (by successive approximations) is laborious, but indirect solutions are easily obtained by observing that in an oscillator with grid-leak bias the steady state is unchanged if the grid leak is replaced by a source of e.m.f. equal to $-I_g R_g$.

In studying behaviour at the threshold of oscillation the values of V_g and r_g for vanishingly small amplitudes are required. The grid current characteristic has the exponential form

$$i_g = I_0 \exp.(v_g/V_0) \quad .. \quad .. \quad (4.23)$$

where I_0 and V_0 are positive constants. Then

$$r_g = -R_g V_0/V_g \quad .. \quad .. \quad (4.24)$$

Fig. 4 shows $-V_g/V_0$ as a function of $R_g I_0/V_0$.

It is seen that the value of r_g may be many times less than for the semi-linear form of characteristic.

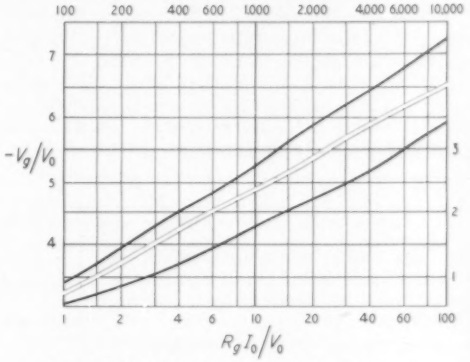

Fig. 4. *Grid bias (exponential characteristic).*

5. Transient Grid and Anode Currents

Let a small disturbance v_{gd} be added to the steady-state grid voltage v_g. The grid current is

$$e(v_g + v_{gd}) = e(v_g) + v_{gd} e'(v_g)$$

The change in grid current produced by v_{gd} is $i_{gd} = v_{gd} e'(v_g)$. Since $v_g = V_{g1} \cos \omega_0 t + V_g$, $e'(v_g)$ can be expressed as a cosine Fourier series in $\omega_0 t$. In complex notation this is

$$e'(v_g) = \sum_{-\infty}^{\infty} S_n \exp. jn\omega_0 t$$

where $S_n = (1/\pi) \int_0^{\pi} e'(V_{g1} \cos x + V_g) \cos nx\,dx$

.. .. .. (5.1)

Following Section 3 the transient voltage is written as

$$v_{gd} = V_d \sum_{-1}^{1} u_n \exp.(p + jn\omega_0)\, t \qquad (5.2)$$

The transient current has an infinite number of terms but only those having the same frequencies as v_{gd} need be considered. Thus

$$i_{gd} = V_d \sum_{-1}^{1} w_n \exp.(p + jn\omega_0)\, t \qquad (5.3)$$

w_n being complex numbers. Equating (5.3) to the terms of like frequencies in the product $v_{gd} e'(v_g)$ gives three equations connecting the values of w_n and u_n. These are conveniently expressed in matrix notation.

$$\begin{bmatrix} w_1 \\ w_0 \\ w_{-1} \end{bmatrix} = \begin{bmatrix} S_0 & S_1 & S_2 \\ S_1 & S_0 & S_1 \\ S_2 & S_1 & S_0 \end{bmatrix} \begin{bmatrix} u_1 \\ u_0 \\ u_{-1} \end{bmatrix} \quad .. \quad (5.4)$$

From (4.2) (4.3) and (5.1) the following relations are obtained.

$$\left.\begin{aligned} (S_0 - S_2)\, r_g &= 1 \\ S_1 R_g &= -(1 + S_0 R_g)\, dV_g/dV_{g1} \\ (1 + S_0 R_g)\,(S_0 + S_2) - 2S_1^2 R_g &= (1 + S_0 R_g)\,(1 - (V_{g1}/r_g)\, dr_g/dV_{g1})/r_g \end{aligned}\right\} \quad .. \quad .. \quad (5.5)$$

The first expression is found by integrating (4.3) by parts, and the second and third by differentiating (4.2) and (4.3) with respect to V_{g1}. These equations are independent of the form of $e\,(v_g)$, but it may be assumed that $e'\,(v_g)$ is always positive, for a negative slope would indicate an unstable form of characteristic. With this restriction it can be shown that

$$\left.\begin{aligned} &S_0 > 0, \quad S_0 + S_2 > 0, \quad S_0 - S_2 > 0, \\ &S_0\,(S_0 + S_2) - 2S_1^2 > 0 \end{aligned}\right\} \quad .. \quad (5.6)$$

The first three inequalities follow at once from the definition of S_n and the fourth can be proved by applying Schwarz's inequality[21]. (5.5) and (5.6) are required for use in later Sections.

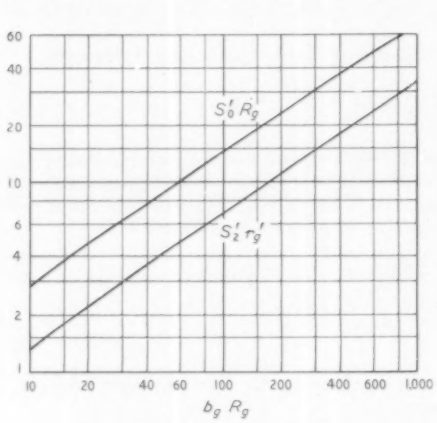

Fig 5. *Grid conductance functions.*

When the grid-bias voltage is supplied from a fixed source and is large enough to stop grid current, $S_0 = S_1 = S_2 = 0$.

If the grid-current characteristic has the semi-linear form of (4.19) it is shown in Appendix 2 that

$$\left.\begin{aligned} S_2/(S_0 - S_2) = S_2 r_g &= (1 + 0{\cdot}72 V_{cg}/V_{g1})\, S_2' r_g' \\ S_2/S_1 &= -(1 - V_{cg}/V_{g1})\, V_g'/V_{g1} + V_{cg}/V_{g1} \\ S_0 R_g &= S_0' R_g\,(1 - 0{\cdot}36 V_{cg}/V_{g1}) \end{aligned}\right\} \quad (5.7)$$

Fig. 5 shows $S_0' R_g$ and $S_2' r_g'$ plotted against $b_g R_g$. S_2/S_1 is found by using Fig. 2.

At the threshold of oscillation when V_{g1} is vanishingly small, the differential coefficients of V_g and r_g appearing in (5.5) are of major importance. It is shown in Appendix 2 that when the grid current has the exponential form (4.23)

$$\left.\begin{aligned} &dV_g/dV_{g1} = nV_{g1}/V_g,\; dr_g/dV_{g1} = mr_g V_{g1}/V_g^2 \\ &n = (V_g/V_0)^2/2(1 - V_g/V_0) \\ &m = -(V_g/V_0)^2\,(1 + V_g/V_0)/4\,(1 - V_g/V_0) \end{aligned}\right\} \quad (5.8)$$

Next the transient anode current is considered. Let small disturbances v_{gd} and v_{ad} be added to the steady-state grid and anode voltages, and let the change in anode current so produced be i_{ad}. Then from (4.4) and (4.5)

$$i_{ad} = (v_{gd} + v_{ad}/\mu)\, f'\,[V_e \cos(\omega_0 t + \theta) + V_g - V_{ca}] - k i_{gd}$$

f' can obviously be expressed as a cosine Fourier series in $\omega_0 t + \theta$. Hence

$$i_{ad} + k i_{gd} = (v_{gd} + v_{ad}/\mu) \sum_{-\infty}^{\infty} G_n \exp.\, jn\,(\omega_0 t + \theta) \quad (5.9)$$

where

$$G_n = (1/\pi) \int_0^{\pi} f'\,(V_e \cos x + V_g - V_{ca}) \cos nx\, dx \quad (5.10)$$

As before, only terms of the three principal frequencies in i_{ad} and v_{ad} need be considered. Let

$$\left.\begin{aligned} i_{ad} &= V_d \sum_{-1}^{1} x_n \exp.\,(p + jn\omega_0)\, t \\ v_{ad} &= V_d \sum_{-1}^{1} y_n \exp.\,(p + jn\omega_0)\, t \end{aligned}\right\} \quad (5.11)$$

Using (5.2), (5.3), and (5.11), $i_{ad} + k i_{gd}$ is equated to the terms of like frequency on the r.h.s. of (5.9) to give

$$\begin{bmatrix} x_1 + kw_1 \\ x_0 + kw_0 \\ x_{-1} + kw_{-1} \end{bmatrix} = \begin{bmatrix} G_0 & G_1 q & G_2 q^2 \\ G_1 q^{-1} & G_0 & G_1 q \\ G_2 q^{-2} & G_1 q^{-1} & G_0 \end{bmatrix} \begin{bmatrix} u_1 + y_1/\mu \\ u_0 + y_0/\mu \\ u_{-1} + y_{-1}/\mu \end{bmatrix} \quad (5.12)$$

in which $q = \exp.\, j\theta$ .. .. .. (5.13)

Expressions for q and q^{-1} are given by (4.17).

Many of the stability criteria can be simply expressed in terms of the coefficients G_n. The following relations are required in later Sections.

$$G_0 - G_2 = g/N = -1/R_E$$
$$= -(1 - kR_T/r_g)/(R_T + R_I/\mu) \quad (5.14)$$

This is obtained by integrating (4.8) by parts and using (4.14) and (5.10). It is independent of the form of $f(v)$. If the restriction that $f'(v)$ should not be negative is imposed, the following inequalities can be proved in the same way as for S_n.

$$G_0 > 0, \quad G_0 + G_2 > 0, \quad G_0 - G_2 > 0,$$
$$G_0(G_0 + G_2) - 2G_1^2 > 0 \ldots \quad \ldots \quad (5.15)$$

In Appendix 2 the values of G_0, G_1 and G_2 for a three-halves-law amplifier are calculated. Fig. 6 shows $G_2/(G_0 - G_2) = -G_2R_E$ and $-G_1R_E$ plotted as functions of the parameter $H = 1 - K + K/Y$. From these graphs the values of G_2/G_1 and G_0R_E are easily obtained. When V_{g1} is very small

$$\left.\begin{aligned} G_0 &= g(1 - Y)^{\frac{1}{2}} = -1/R_E, \\ G_1 &= -Y/4KR_E(1 - Y) \\ G_2 &= Y^2/32K^2R_E(1 - Y)^2 \end{aligned}\right\} \quad \ldots \quad (5.16)$$

When V_{g1} is large

$$G_2/G_1 = \frac{(1 - 15H/16 + 35H^2/256 + \ldots)}{(1 - 3H/16 - 5H^2/256 + \ldots)} \quad (5.17)$$

It is also shown in the Appendix that

$$G_1 > 0 \text{ and } G_1^2 - G_0G_2 > 0 \quad \ldots \quad (5.18)$$

In the foregoing analysis it has been tacitly assumed that when the amplifier is a tetrode or pentode the screen-grid voltage remains constant. If this condition is not satisfied the theory must be modified in the way discussed in Appendix 4.

6. Determinantal Equation for p

In the preceding Section the transient grid and anode currents were expressed in terms of the corresponding voltages and the amplifier parameters, but these currents and voltages are also related through the impedances of the feedback network. Written in operational form, these relations are

$$i_{ad} = -\{1/Z_t(D)\}\, v_{gd} - \{Z_0(D)/Z_t(D)\}\, i_{gd}$$
$$v_{ad} = \{Z_i(D)/Z_t(D)\}\, v_{gd} + Z_n(D)\, i_{gd}$$
$$\ldots \quad \ldots \quad \ldots \quad (6.1)$$

Now $Z(D)\exp.(p + jn\omega_0)\,t$
$$= \exp.(p + jn\omega_0)\,t\,Z(p + jn\omega_0)$$

Substituting in these equations for v_{gd}, i_{gd}, v_{ad}, and i_{ad} according to (5.2), (5.3), and (5.11), gives

$$\begin{bmatrix} u_1 + w_1(Z_0^+ - kZ_t^+) \\ u_0 + w_0(Z_0^0 - kZ_t^0) \\ u_{-1} + w_{-1}(Z_0^- - kZ_t^-) \end{bmatrix} + \begin{bmatrix} G_0Z_t^+ & G_1Z_t^+q & G_2Z_t^+q^2 \\ G_1Z_t^0q^{-1} & G_0Z_t^0 & G_1Z_t^0q \\ G_2Z_t^-q^{-2} & G_1Z_t^-q^{-1} & G_0Z_t^- \end{bmatrix} \begin{bmatrix} u_1(1 + Z_i^+/\mu Z_t^+) + w_1Z_n^+/\mu \\ u_0(1 + Z_i^0/\mu Z_t^0) + w_0Z_n^0/\mu \\ u_{-1}(1 + Z_i^-/\mu Z_t^-) + w_{-1}Z_n^-/\mu \end{bmatrix} = 0$$

$$x_n = -u_n/Z_t(p + jn\omega_0) - w_nZ_0(p + jn\omega_0)/Z_t(p + jn\omega_0)$$
$$y_n = u_nZ_i(p + jn\omega_0)/Z_t(p + jn\omega_0) + w_nZ_n(p + jn\omega_0)$$

In order to conserve space the following notation is adopted

$$Z_i(p + j\omega_0) = Z_i^+,$$
$$Z_i(p) = Z_i^0,\ Z_i(p - j\omega_0) = Z_i^-$$

with similar expressions for Z_0, Z_t, etc.

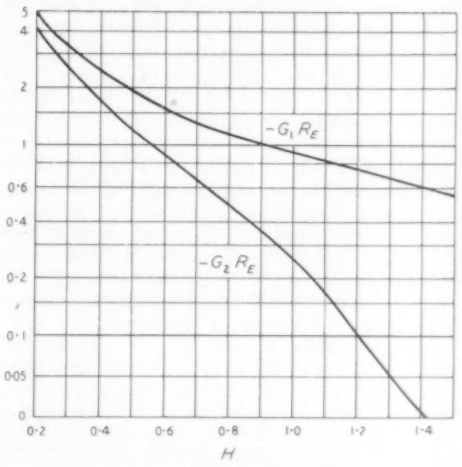

Fig. 6. *Anode conductance functions.*

It is convenient to refer to Z_i^+, Z_i^-, etc., as the high-frequency impedances, and to Z_i^0, etc., as the low-frequency impedances. Impedances without superscripts are meant, as in previous Sections, to refer to the oscillation frequency; e.g., $Z_T = Z_T(j\omega_0)$. When $p = 0$, $Z_i^0 = R_a$ and $Z_0^0 = R_g$ (the anode-decoupling and grid-leak resistances). When $p = \pm\frac{1}{2}j\omega_0$ the 'low' frequencies merge with the 'high' frequencies, but in most practical oscillators all the impedances are then negligible.

The above expressions for x_n and y_n are now substituted in (5.12) and both sides of the equation premultiplied by the diagonal matrix

$$\begin{bmatrix} Z_t^+ & 0 & 0^5 \\ 0 & Z_0^0 & 0 \\ 0 & 0 & Z_t^- \end{bmatrix}$$

The result is

Finally the w terms are substituted according to (5.4) to give a set of equations for u_n.

$$\begin{bmatrix} a_1 & b_1 & c_1 \\ a_0 & b_0 & c_0 \\ a_{-1} & b_{-1} & c_{-1} \end{bmatrix} \begin{bmatrix} u_1 \\ u_0 \\ u_{-1} \end{bmatrix} = 0 \quad .. \qquad (6.2)$$

The coefficients are as follows:

$$\begin{aligned}
a_1 &= 1 + G_0 (Z_t^+ + Z_i^+/\mu) + S_0 (Z_0^+ - kZ_t^+) + G_0S_0Z_n^+Z_t^+/\mu + G_1S_1qZ_n^0Z_t^+/\mu + G_2S_2q^2Z_n^-Z_t^+/\mu \\
b_1 &= G_1qZ_t^+ (1 + Z_i^0/\mu Z_t^0) + S_1 (Z_0^+ - kZ_t^+) + G_0S_1Z_n^+Z_t^+/\mu + G_1S_0qZ_n^0Z_t^+/\mu + G_2S_1q^2Z_n^-Z_t^+/\mu \\
c_1 &= G_2q^2Z_t^+ (1 + Z_i^-/\mu Z_t^-) + S_2 (Z_0^+ - kZ_t^+) + G_0S_2Z_n^+Z_t^+/\mu + G_1S_1qZ_n^0Z_t^+/\mu + G_2S_0q^2Z_n^-Z_t^+/\mu \\
a_0 &= G_1q^{-1}Z_t^0 (1 + Z_i^+/\mu Z_t^+) + S_1 (Z_0^0 - kZ_t^0) + G_0S_1Z_n^0Z_t^0/\mu + G_1S_0q^{-1}Z_n^+Z_t^0/\mu + G_1S_2qZ_n^-Z_t^0/\mu \\
b_0 &= 1 + G_0 (Z_t^0 + Z_i^0/\mu) + S_0 (Z_0^0 - kZ_t^0) + G_0S_0Z_n^0Z_t^0/\mu + G_1S_1Z_t^0 (q^{-1}Z_n^+ + qZ_n^-)/\mu \\
c_0 &= G_1qZ_t^0 (1 + Z_i^-/\mu Z_t^-) + S_1 (Z_0^0 - kZ_t^0) + G_0S_1Z_n^0Z_t^0/\mu + G_1S_0qZ_n^-Z_t^0/\mu + G_1S_2q^{-1}Z_n^+Z_t^0/\mu \\
a_{-1} &= G_2q^{-2}Z_t^- (1 + Z_i^+/\mu Z_t^+) + S_2 (Z_0^- - kZ_t^-) + G_0S_2Z_n^-Z_t^-/\mu + G_1S_1q^{-1}Z_n^0Z_t^-/\mu + G_2S_0q^{-2}Z_n^+Z_t^-/\mu \\
b_{-1} &= G_1q^{-1}Z_t^- (1 + Z_i^0/\mu Z_t^0) + S_1 (Z_0^- - kZ_t^-) + G_0S_1Z_n^-Z_t^-/\mu + G_1S_0q^{-1}Z_n^0Z_t^-/\mu + G_2S_1q^{-2}Z_n^+Z_t^-/\mu \\
c_{-1} &= 1 + G_0 (Z_t^- + Z_i^-/\mu) + S_0 (Z_0^- - kZ_t^-) + G_0S_0Z_n^-Z_t^-/\mu + G_1S_1q^{-1}Z_n^0Z_t^-/\mu + G_2S_2q^{-2}Z_n^+Z_t^-/\mu
\end{aligned} \qquad (6.3)$$

Neglecting the trivial case of $u_1 = u_0 = u_{-1} = 0$, the condition for the consistency of equations (6.2) is that the determinant of the coefficient matrix should vanish[18]. The auxiliary condition that at least one of the minors should not vanish is always satisfied. Since all the coefficients are functions of p the determinant is also a function of p. Let

$$D(p) = \begin{bmatrix} a_1 & b_1 & c_1 \\ a_0 & b_0 & c_0 \\ a_{-1} & b_{-1} & c_{-1} \end{bmatrix} \quad .. \quad .. \qquad (6.4)$$

The condition for consistency is then

$$D(p) = 0 \quad .. \quad .. \quad .. \qquad (6.5)$$

This is the characteristic equation of the oscillator the roots of which are the characteristic frequencies of the transient normal modes. When the determinant is multiplied out, the general expression for $D(p)$ is of extreme length even allowing for some cancellation of terms. In most practical examples, however, the expression can be greatly simplified, in one way or another, by making suitable approximations, but these depend on the particular form of oscillator and the type of instability being studied.

(To be continued)

REFERENCES

[1] E. V. Appleton and B. van der Pol, "On a Type of Oscillation Hysteresis in a Simple Triode Oscillator", *Phil. Mag.*, 1922, Vol. 43, p. 177.
[2] W. H. M. Greaves, "On the Stability of the Periodic States of the Triode Oscillator", *Proc. Camb. Phil. Soc.*, 1923, Vol. 22, p. 16.
[3] B. van der Pol, "On Oscillation Hysteresis in a Triode Generator with Two Degrees of Freedom", *Phil. Mag.*, 1922, Vol. 43, p. 700.
[4] N. Minorsky, "Introduction to Non-Linear Mechanics" (J. W. Edwards, Ann Arbor, 1947).
[5] N. Kryloff and N. Bogoliuboff, "Introduction to Non-Linear Mechanics" (Princeton University Press, 1947).
[6] A. A. Andronow and C. E. Chaikin, "Theory of Oscillations" (Princeton University Press, 1949).
[7] J. J. Stoker, "Non-Linear Vibrations in Mechanical and Electrical Systems" (Interscience Publishers Inc., New York, 1950).
[8] S. Lefschetz (Editor), "Contributions to the Theory of Non-Linear Oscillations" (Princeton University Press, Vol. 1, 1950, Vol. 2, 1952).
[9] J. van Slooten, "The Stability of a Triode Oscillator with Grid Condenser and Leak", *Wireless Engineer*, 1939, Vol. 16, p. 16.
[10] J. van Slooten, "Stability and Instability in Triode Oscillators", *Philips Tech. Rev.*, 1942, Vol. 7, pp. 40 and 171.
[11] W. A. Edson, "Intermittent Behaviour in Oscillators", *Bell Syst. Tech. J.*, 1945, Vol. 24, p. 1.
[12] W. A. Edson, "Vacuum-Tube Oscillators" (John Wiley & Sons Inc., New York, 1953).
[13] Ibid., p. 440.
[14] Ibid., Ch. 10.
[15] Ibid., p. 230.
[16] E. T. Whittaker and G. N. Watson, "Modern Analysis", 4th Edn., p. 412 (Cambridge University Press, 1940).
[17] Ibid., p. 415.
[18] A. C. Aitken, "Determinants and Matrices", 2nd Edn., Ch. 3 (Oliver & Boyd, Edinburgh, 1942).
[19] A. S. Gladwin, "Oscillation Amplitude in Simple Valve Oscillators", *Wireless Engineer*, 1949, Vol. 26, pp. 159 and 201.
[20] B. van der Pol, "Forced Oscillations in a Circuit with Non-Linear Resistance", *Phil. Mag.*, 1927, Vol. 3, p. 65.
[21] G. H. Hardy, "A Course of Pure Mathematics", 9th. Edn., p. 340 (Cambridge University Press, 1948).
[22] W. H. Bode, "Network Analysis and Feedback Amplifier Design", p. 24 (D. van Nostrand Co. Inc., New York, 1945).
[23] Ibid., p. 148.
[24] Ibid., p. 106.
[25] Ibid., p. 165.
[26] E. J. Routh, "A Treatise on the Stability of a given State of Motion Particularly Steady Motion", p. 28 (Macmillan & Co., London, 1877).
[27] Ibid., p. 23.
[28] A. Hurwitz, "Ueber die Bedingungen unter welchen eine Gleichung nur Wurzeln mit negativen reellen Theilen besitz", *Math. Ann.*, 1895, Vol. 46, p. 273.
[29] E. T. Copson, "Theory of Functions of a Complex Variable", p. 119 (Oxford University Press, 1935).
[30] H. Nyquist, "Regeneration Theory", *Bell Syst. Tech. J.*, 1932, Vol. 11, p. 126.
[31] L. S. Dzung, "The Stability Criterion", in "Automatic and Manual Control", p. 13 (Butterworth's Scientific Publications, London, 1952).
[32] E. E. Zepler, "Oscillation Hysteresis in Grid Detectors", *Wireless Engineer*, 1946, Vol. 23, p. 222.
[33] H. W. Turnbull, "Theory of Equations", Ch. 9 (Oliver & Boyd, Edinburgh, 1939).

ACTIVE LADDER NETWORK ANALYSIS

By Haim D. Polishuk, M.Sc.

SUMMARY.—An expression is developed, based on Thévenin's Theorem, for the voltage appearing across the final 'rung' of an active linear n-mesh ladder network, which yields a set of recurring admittance coefficients. It is shown how the compact representation of these coefficients sets the pattern for a straightforward and economical computational procedure of analysis. Examples are given, which illustrate the general applicability of the method offered to the analysis of all networks of the conventional ladder geometry.

Introduction

A VARIETY of analytical methods as well as fundamental theorems have been proposed for the analysis of electrical networks. The classical among these methods appears to be by means of determinants, based on Kirchhoff's laws and derived in terms of either the network junctions or meshes. Determinants provide a very generalized and concise way of expressing the required operations and results in the solution of networks. However, the algebraic manipulations involved and expansions of high-order determinants of multi-mesh networks do not constitute any rapid or straightforward process, and a considerable amount of care must be exercised to avoid errors in the repeated operations of reduction or in proper sign.

In dealing with active, asymmetrical, linear and time-invariant networks the primary problem that commonly presents itself is the determination of a definite circuit parameter or physical quantity, such as the current flowing through a branch, the voltage or impedance across a junction-pair, etc., by means of which the performance of the system may be studied or quantitatively evaluated.

The following treatment concerns itself with an analysis of a particular type of network, derivatives of which, nevertheless, characterize a considerable array of equivalent practical circuits encountered in the fields of radio-communication and electronics, by a method aimed at effecting computational economy. The voltage appearing across the final, n-th, 'rung' of an active, linear, unbalanced ladder network is expressed as a function of all the individual, randomly-distributed sources of e.m.f., in a process of network reduction by means of the successive application of Thévenin's Theorem to each of the n meshes in turn. This results in a set of admittance coefficients, the evaluation of which completes the quantitative determination of the required voltage. These coefficients turn out to be simple recurrent algebraic expressions of impedance and admittance products that provide an immediately applicable, compact and easily remembered process of obtaining the desired solution directly from the network or its equivalent form. Knowledge of this end-potential enables one to arrive rapidly at each of the other $n - 1$ junction potentials directly from Kirchhoff's current equations without actually solving them.

This fundamental mode of attack which purposely avoids the use of advanced matrix techniques should, it is believed, be more significant to the engineer who is interested in a practical method of solution. It should also be noted the proposed method is free from the inevitable redundancy inherent in the classical analysis by determinants, is readily adapted to practical computations, and becomes particularly useful when dealing with multi-mesh networks of the given general configuration.

Fig. 1. *An active, linear n-mesh ladder network.*

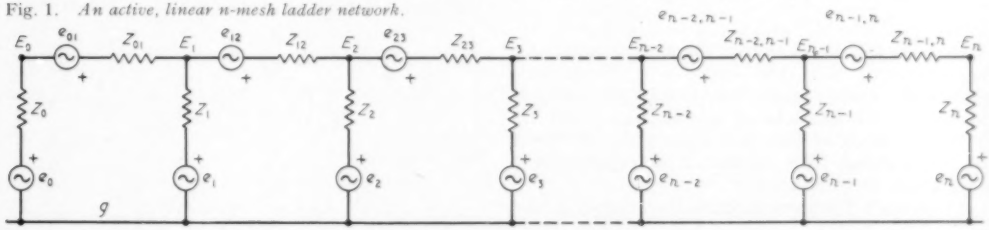

General Theory

An active ladder structure is shown in Fig. 1, composed of generators (all operating at any one given frequency) and linear bilateral impedances, appearing in both the series and shunt branches of an n-mesh network.

Let Z_k $(k = 0, 1, 2, \ldots, n)$ denote shunt impedances, and e_k the shunt generators, all terminating in the common reference-junction

MS accepted by the Editor, July 1954

g (which is of known potential). The series generators* and impedances, bridging every k-th and $(k+1)$-th terminals, will be denoted respectively by $e_{k,k+1}$ and $Z_{k,k+1}$. Furthermore, let V_{gk} and Z_{gk} signify, respectively, the equivalent Thévenin generator voltage and impedance; namely, the open-circuited voltage between g and any k-th terminal when the network to the right of these terminals is disconnected, in series with the impedance which would be measured looking back to the left of terminals $g-k$ with all generators inactive and replaced by their internal impedances.

One formal approach to the numerical solution of the given network is to apply Kirchhoff's voltage law to each of the n meshes in turn, to write down the resulting n linear simultaneous equations and to solve for each of the n loop currents by means of Cramer's rule, or by the method of systematic elimination of the variables. By the nature of the given geometry, the resulting determinant formed by the contour and mutual impedances of the n meshes will be a symmetric continuant which will, therefore, considerably simplify the otherwise formidable manipulations required of a completely expanded solution.

In terms of the unknown junction potentials E_k (measurable between terminals g and any k), and considering the k-th junction $(1 \leqslant k \leqslant n-1)$, the steady-state equilibrium equation can be expressed as

$$y_{k-1,k}E_{k-1} + (y_{k-1,k} + y_k + y_{k,k+1})E_k - y_{k,k+1}E_{k+1} = e_{k-1,k}y_{k-1,k} + e_k y_k - e_{k,k+1}y_{k,k+1} \quad \ldots \quad (1)$$

where any $y_k = Z_k^{-1}$ and $y_{k,k+1} = Z_{k,k+1}^{-1}$.

It is seen from (1) that if the end-potential E_n were known, then the entire set of junction potentials could easily be extracted through successive substitutions of known E_{k+1} and E_k in the respective junction equations, to yield E_{k-1}, by going from terminal n progressively backwards to terminal 0.

Thévenin's Theorem suggests that the structure given in Fig. 1 may be condensed into the one illustrated in Fig. 2 where a Thévenin equivalent generator is replaced across terminals g and $n-1$; and furthermore, that V_{gn} identically equals E_n. Equating short-circuit currents, it follows that

$$\frac{V_{gn}}{Z_{gn}} = \frac{e_{n-1,n} + V_{g,n-1}}{Z_{n-1,n} + Z_{g,n-1}} + \frac{e_n}{Z_n} = \frac{\dfrac{e_n}{Z_n}\left(1 + \dfrac{Z_{n-1,n}}{Z_{g,n-1}}\right) + \dfrac{e_{n-1,n}}{Z_{g,n-1}} + \dfrac{V_{g,n-1}}{Z_{g,n-1}}}{1 + \dfrac{Z_{n-1,n}}{Z_{g,n-1}}}, \quad (2)$$

but,

$$\frac{1}{Z_{gn}} = \frac{1}{Z_n} + \frac{1}{Z_{n-1,n} + Z_{g,n-1}} = \frac{\dfrac{1}{Z_n}\left(1 + \dfrac{Z_{n-1,n}}{Z_{g,n-1}}\right) + \dfrac{1}{Z_{g,n-1}}}{1 + \dfrac{Z_{n-1,n}}{Z_{g,n-1}}}, \quad \ldots \quad (3)$$

hence, substituting (3) into (2) gives,

$$V_{gn} = \frac{\dfrac{e_n}{Z_n}\left(1 + \dfrac{Z_{n-1,n}}{Z_{g,n-1}}\right) + \dfrac{e_{n-1,n}}{Z_{g,n-1}} + \dfrac{V_{g,n-1}}{Z_{g,n-1}}}{\dfrac{1}{Z_n}\left(1 + \dfrac{Z_{n-1,n}}{Z_{g,n-1}}\right) + \dfrac{1}{Z_{g,n-1}}}. \quad (4)$$

This last result is also obtainable by applying the dual of Thévenin's Theorem, or what is known as Norton's Theorem, to the situation depicted in Fig. 2.

If just a 2-mesh network $(n=2)$ is considered,

$$Vg_2 = \frac{\dfrac{e_2}{Z_2}\left(1 + \dfrac{Z_{12}}{Z_{g_1}}\right) + \dfrac{e_{12}}{Z_{g_1}} + \dfrac{V_{g_1}}{Z_{g_1}}}{\dfrac{1}{Z_2}\left(1 + \dfrac{Z_{12}}{Z_{g_1}}\right) + \dfrac{1}{Z_{g_1}}}, \quad (5)$$

but, from (2),

$$\frac{V_{g_1}}{Z_{g_1}} = \frac{\dfrac{e_1}{Z_1}\left(1 + \dfrac{Z_{01}}{Z_{g_0}}\right) + \dfrac{e_{01}}{Z_{g_0}} + \dfrac{V_{g_0}}{Z_{g_0}}}{1 + \dfrac{Z_{01}}{Z_{g_0}}} \quad \ldots \quad (6)$$

Substituting (6) into (5) and rearranging, yields,

$$V_{g_2} = \frac{\left[\dfrac{e_2}{Z_2}\left(1 + \dfrac{Z_{12}}{Z_{g_1}}\right) + \dfrac{e_{12}}{Z_{g_1}}\right]\left(1 + \dfrac{Z_{01}}{Z_{g_0}}\right) + \dfrac{e_1}{Z_1}\left(1 + \dfrac{Z_{01}}{Z_{g_0}}\right) + \dfrac{e_{01}}{Z_{g_0}} + \dfrac{V_{g_0}}{Z_{g_0}}}{\left[\dfrac{1}{Z_2}\left(1 + \dfrac{Z_{12}}{Z_{g_1}}\right) + \dfrac{1}{Z_{g_1}}\right]\left(1 + \dfrac{Z_{01}}{Z_{g_0}}\right)},$$

$$= \frac{\dfrac{e_0 + e_{01} + e_{12}}{Z_0} + \dfrac{e_1 + e_{12}}{Z_1}\left(1 + \dfrac{Z_{01}}{Z_{g_0}}\right) + \dfrac{e_2}{Z_2}\left(1 + \dfrac{Z_{01}}{Z_{g_0}}\right)\left(1 + \dfrac{Z_{12}}{Z_{g_1}}\right)}{\dfrac{1}{Z_0} + \dfrac{1}{Z_1}\left(1 + \dfrac{Z_{01}}{Z_{g_0}}\right) + \dfrac{1}{Z_2}\left(1 + \dfrac{Z_{01}}{Z_{g_0}}\right)\left(1 + \dfrac{Z_{12}}{Z_{g_1}}\right)}, \quad \ldots \quad (7)$$

* The reference polarities appended to generators assume an arbitrary potential rise, in the direction of positive current flow (clockwise for loop currents); affixed double-subscripts, when employed, refer to the datum junction g.

noticing that $V_{g0} = e_0$ and $Z_{g0} = Z_0$, while from (3), for $n = 2$,

$$\frac{1}{Z_{g1}}\left(1 + \frac{Z_{01}}{Z_{g0}}\right) = \frac{1}{Z_1}\left(1 + \frac{Z_{01}}{Z_{g0}}\right) + \frac{1}{Z_0}\,.$$

If a similar process is pursued for a 3-mesh network ($n = 3$), the following result is arrived at:—

$$V_{g3} = \frac{\dfrac{e_0 + e_{01} + e_{12} + e_{23}}{Z_0} + \dfrac{e_1 + e_{12} + e_{23}}{Z_1}\left(1 + \dfrac{Z_{01}}{Z_{g0}}\right) + \dfrac{e_2 + e_{23}}{Z_2}\left(1 + \dfrac{Z_{01}}{Z_{g0}}\right)\left(1 + \dfrac{Z_{12}}{Z_{g1}}\right) + \dfrac{e_3}{Z_3}\left(1 + \dfrac{Z_{01}}{Z_{g0}}\right)\left(1 + \dfrac{Z_{12}}{Z_{g1}}\right)\left(1 + \dfrac{Z_{23}}{Z_{g2}}\right)}{\dfrac{1}{Z_0} + \dfrac{1}{Z_1}\left(1 + \dfrac{Z_{01}}{Z_{g0}}\right) + \dfrac{1}{Z_2}\left(1 + \dfrac{Z_{01}}{Z_{g0}}\right)\left(1 + \dfrac{Z_{12}}{Z_{g1}}\right) + \dfrac{1}{Z_3}\left(1 + \dfrac{Z_{01}}{Z_{g0}}\right)\left(1 + \dfrac{Z_{12}}{Z_{g1}}\right)\left(1 + \dfrac{Z_{23}}{Z_{g2}}\right)}\,. \qquad (8)$$

By the method of mathematical induction one may readily deduce the general expression for the voltage V_{gn} appearing across the end terminals $g - n$ of the n-mesh network of Fig. 1. Thus,

$$\begin{aligned} E_n \equiv V_{gn} &= [(e_0 + e_{01} + e_{12} + \ldots + e_{n-1,n})\,\lambda_0 + (e_1 + e_{12} + \ldots + e_{n-1,n})\lambda_1 \\ &\quad + (e_2 + e_{23} + \ldots + e_{n-1,n})\,\lambda_2 + \ldots + (e_{n-1} + e_{n-1,n})\,\lambda_{n-1} \\ &\quad + e_n\lambda_n]/(\lambda_0 + \lambda_1 + \lambda_2 + \ldots + \lambda_n) \\ &= \sum_{k=0}^{k=n}\left(e_k + \sum_{j=k}^{j=n-1} e_{j,j+1}\right)\lambda_k \Big/ \sum_{k=0}^{k=n}\lambda_k\,, \qquad (9) \end{aligned}$$

where the coefficients λ_k ($k = 0,\ 1,\ 2,\ \ldots,\ n$), which are dimensionally admittances, are defined as follows:—

$$\left.\begin{aligned} \lambda_0 &= \frac{1}{Z_0} \\ \lambda_1 &= \frac{1}{Z_1}\left(1 + \frac{Z_{01}}{Z_{g0}}\right) \\ \lambda_2 &= \frac{1}{Z_2}\left(1 + \frac{Z_{01}}{Z_{g0}}\right)\left(1 + \frac{Z_{12}}{Z_{g1}}\right) \\ \lambda_3 &= \frac{1}{Z_3}\left(1 + \frac{Z_{01}}{Z_{g0}}\right)\left(1 + \frac{Z_{12}}{Z_{g1}}\right)\left(1 + \frac{Z_{23}}{Z_{g2}}\right) \\ &\cdots\cdots\cdots\cdots \\ \lambda_n &= \frac{1}{Z_n}\left(1 + \frac{Z_{01}}{Z_{g0}}\right)\left(1 + \frac{Z_{12}}{Z_{g1}}\right)\ldots\left(1 + \frac{Z_{n-2,n-1}}{Z_{g,n-2}}\right)\left(1 + \frac{Z_{n-1,n}}{Z_{g,n-1}}\right) \\ &= \frac{1}{Z_n}\prod_{k=0}^{k=n-1}\left(1 + \frac{Z_{k,k+1}}{Z_{gk}}\right). \end{aligned}\right\} \qquad (10)$$

Expression (9) which exhibits the principle of superposition as applied to linear network loops, states that the potential across the end terminals $g - n$ constitutes the sum of the component contributions of all active individual loops that pass through these end-terminals, considered separately, in a manner independent of the effects of all other voltage sources not series-connected along each such loop. The various factors involved in the individual coefficients λ_k may now be expanded and regrouped while doing away with the general impedances Z_{gk}. It should be noted in passing, that each of the admittances $Y_{gk} = Z_{gk}^{-1}$ is expressible in a continued fraction. With the shunt branches expressed as admittances and the series branches as impedances, this takes the form,

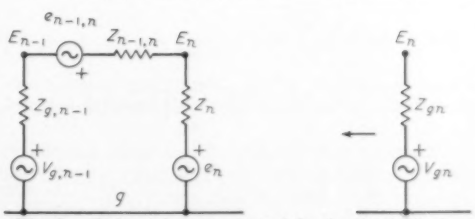

Fig. 2. *Thévenin's equivalent of the circuit of Fig. 1.*

$$Y_{gk} = y_k + \cfrac{1}{Z_{k-1,k} + \cfrac{1}{y_{k-1} + \cfrac{1}{Z_{k-2,k-1} + \cfrac{1}{y_{k-2} + \cfrac{1}{\ddots \; + \cfrac{1}{Z_{01} + \cfrac{1}{y_0}}}}}}}} \qquad \ldots \quad \ldots \quad (11)$$

To transform the expression of λ_k into a series of recurrence functions, use is made of relation (3):—

$$\left.\begin{aligned}
\lambda_0 &= \frac{1}{Z_0}\,, \\
\lambda_1 &= \frac{1}{Z_1}\left(1 + \frac{Z_{01}}{Z_{g0}}\right) = \frac{1}{Z_1}\left(1 + \lambda_0 Z_{01}\right), \\
\lambda_2 &= \frac{1}{Z_2}\left(1 + \frac{Z_{01}}{Z_{g0}}\right)\left(1 + \frac{Z_{12}}{Z_{g1}}\right) \\
&= \frac{1}{Z_2}\left[\left(1 + \frac{Z_{01}}{Z_{g0}}\right) + \left(1 + \frac{Z_{01}}{Z_{g0}}\right)\left(\frac{1}{Z_{01} + Z_{g0}} + \frac{1}{Z_1}\right) Z_{12}\right] \\
&= \frac{1}{Z_2}\left[1 + \lambda_0 (Z_{01} + Z_{12}) + \lambda_1 Z_{12}\right], \text{ and similarly,} \\
\lambda_3 &= \frac{1}{Z_3}\left[1 + \lambda_0 (Z_{01} + Z_{12} + Z_{23}) + \lambda_1 (Z_{12} + Z_{23}) + \lambda_2 Z_{23}\right], \\
&\text{— — — — — — — — — — — — —} \\
\lambda_n &= \frac{1}{Z_n}\Big[1 + \lambda_0 (Z_{01} + Z_{12} + \ldots + Z_{n-1,n}) + \lambda_1 (Z_{12} + Z_{23} + \ldots + Z_{n-1,n}) + \ldots \\
&\qquad + \lambda_{n-2} (Z_{n-2,n-1} + Z_{n-1,n}) + \lambda_{n-1} Z_{n-1,n}\Big] \\
&= \frac{1}{Z_n}\left[1 + \sum_{k=0}^{k=n-1} \lambda_k \left(\sum_{j=k}^{j=n-1} Z_{j,j+1}\right)\right].
\end{aligned}\right\} \quad (12)$$

Examination of (12) reveals the important relationship:—

$$Z_n \lambda_n = Z_{n-1} \lambda_{n-1} + \left(\sum_{k=0}^{k=n-1} \lambda_k\right) Z_{n-1,n}\,, \qquad (13)$$

and while generally,

$$Z_n \lambda_n = Z_{n-1} \lambda_{n-1}\left(1 + \frac{Z_{n-1,n}}{Z_{g,n-1}}\right), \qquad \ldots \quad (14)$$

it can easily be shown that

$$Z_{gn} = Z_n \lambda_n \Big/ \sum_{k=0}^{k=n} \lambda_k \quad \ldots \quad \ldots \quad \ldots \quad (15)$$

Thus, evaluation of the admittance coefficients, preferably by means of (13), completes the solution for E_n.

One may now readily notice that, should all series branches be shorted ($e_{k,k+1} = 0$ and $Z_{k,k+1} = 0$), then, while every $\lambda_k = y_k$, (9) reduces to what is known as Millman's Theorem, namely,

$$E_n = \frac{\sum_{k=0}^{k=n} e_k y_k}{\sum_{k=0}^{k=n} y_k}\,. \qquad \ldots \quad \ldots \quad \ldots \quad (16)$$

Recurrence relation (13) may also be normalized and expressed in terms of the dimensionless ratio $\lambda_k/\lambda_0 = \phi_k$. Thus,

$$Z_k \phi_k = Z_{k-1} \phi_{k-1} + \left[\sum_{j=0}^{j=k-1} \phi_j\right] Z_{k-1,k} \; (1 < k < n), \qquad \ldots \quad \ldots \quad (17)$$

with $\phi_0 = 1$. The introduction of ϕ_k will prove useful should $Z_0 = 0$, although, so far as the evaluation of E_n is concerned the series impedances Z_0 and Z_{01} may always be conveniently interchanged.

Illustrations

The following examples will serve to illustrate the application of the suggested method to two specific cases.

1. A detailed numerical solution of the 7-mesh network shown in Fig. 3 will start by the determination of E_7, the end-potential, for which λ_0 to λ_7, must first be evaluated. Relation (13) states that:—

$$Z_k\lambda_k = Z_{k-1}\,\lambda_{k-1} + (\lambda_0 + \lambda_1 + \ldots + \lambda_{k-1}) \times Z_{k-1,k}\ (1 \leqslant k \leqslant n)$$

with $Z_0\lambda_0 = 1$, and therefore provides a simple and systematic procedure for arriving at any λ.

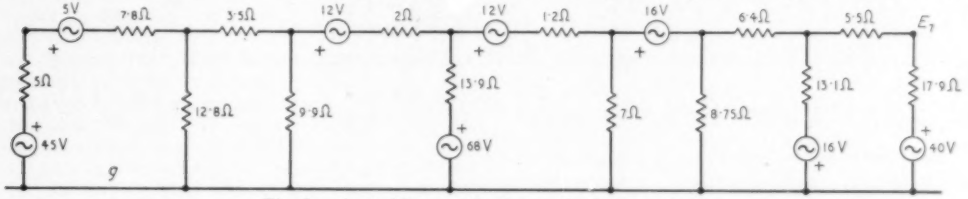

Fig. 3. *A specific example of an active ladder network.*

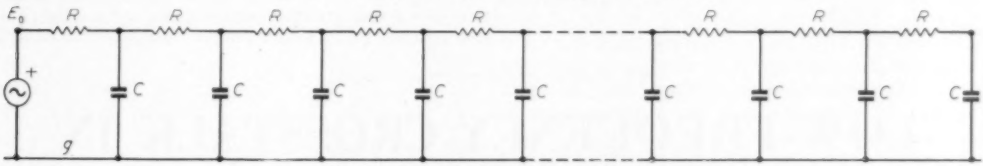

Fig. 4. *The n-section RC filter network.*

By inspection, and listing all arithmetical operations in tabulated order, the exact solution will take the following straightforward form:—

Z_k	λ_k	$= Z_{k-1}\,\lambda_{k-1} + [\lambda_0 + \ldots \lambda_{k-1}] \times Z_{k-1,k}$		$\therefore \lambda_k =$
5·0	λ_0	$= 1$	.. ..	$\lambda_0 = 0{\cdot}2$
12·8	λ_1	$= 1 + 0{\cdot}2 \times 7{\cdot}8 = 2{\cdot}56$	.. ..	$\lambda_1 = 0{\cdot}2$
9·9	λ_2	$= 2{\cdot}56 + 0{\cdot}4 \times 3{\cdot}5 = 3{\cdot}96$	.. ..	$\lambda_2 = 0{\cdot}4$
13·9	λ_3	$= 3{\cdot}96 + 0{\cdot}8 \times 2{\cdot}0 = 5{\cdot}56$	.. ..	$\lambda_3 = 0{\cdot}4$
7·0	λ_4	$= 5{\cdot}56 + 1{\cdot}2 \times 1{\cdot}2 = 7{\cdot}0$	.. ..	$\lambda_4 = 1{\cdot}0$
8·75	λ_5	$= 7{\cdot}0 + 2{\cdot}2 \times 0 = 7{\cdot}0$	.. ..	$\lambda_5 = 0{\cdot}8$
13·1	λ_6	$= 7{\cdot}0 + 3{\cdot}0 \times 6{\cdot}4 = 26{\cdot}2$	.. ..	$\lambda_6 = 2{\cdot}0$
17·9	λ_7	$= 26{\cdot}2 + 5{\cdot}0 \times 5{\cdot}5 = 53{\cdot}7$	.. ..	$\lambda_7 = 3{\cdot}0$

$$\therefore \sum_{k=0}^{k=7} \lambda_k = 8{\cdot}0$$

Applying now expression (9) directly,

$$E_7 = \frac{1}{8}\Big[(45 - 5 - 12 - 12 - 16) \times 0{\cdot}2 + (-12 - 12 - 16) \times 0{\cdot}2 + (-12 - 12 - 16) \times 0{\cdot}4 + (68 - 12 - 16) \times 0{\cdot}4 + (-16) \times 1{\cdot}0 + (0) \times 0{\cdot}8 + (-16) \times 2{\cdot}0 + (40) \times 3{\cdot}0\Big]$$

$$= +8{\cdot}0 \text{ volts.}$$

Also,

$$Z_{g7} = \frac{Z_7\,\lambda_7}{\sum_{k=0}^{k=7} \lambda_k} = \frac{53{\cdot}7}{8} = 6{\cdot}71\ \Omega,$$

2. Given an n-mesh ladder network made up of equal series resistors and equal shunt pure capacitors, excited by a single voltage source $E_0 = e\rho(t)$, as shown in Fig. 4, let it be required to determine the distribution of voltage throughout the various branches of this network in the sinusoidal steady-state. Without recourse to mesh or node equations and the use of elimination or substitution procedures, comparing this network with the general one in Fig. 1, it is readily seen from (9) that since only the first voltage source is involved,

$$E_n = \frac{E_0\,\lambda_0}{\sum_{k=0}^{k=n} \lambda_k} = \frac{E_0}{\sum_{k=0}^{k=n} \phi_k},$$

hence,

$$\frac{E_0}{E_n} = \sum_{k=0}^{k=n} \phi_k .$$

With $p = j\omega$, it follows that every series resistance divided by any shunt reactance equals pT where $T = RC$. Thus, referring to (17), and taking $Z_0 = 0$, the following sequence of polynomials becomes immediately evident:

$\phi_0 = 1$; $\phi_3 = 3\,(pT) + 4\,(pT)^2 + (pT)^3$

$\phi_1 = pT$; $\phi_4 = 4\,(pT) + 10\,(pT)^2 + 6\,(pT)^3 + (pT)^4$

$\phi_2 = 2\,(pT) + (pT)^2$; $\phi_5 = 5\,(pT) + 20\,(pT)^2 + 21\,(pT)^3 + 8\,(pT)^4 + (pT)^5$, etc.

Examination of the numerical coefficients of these polynomials will suggest that they can also be expressed in terms of the factorial fractions; i.e.,

$$\phi_k = \binom{k}{1}(pT) + \binom{k+1}{3}(pT)^2 + \binom{k+2}{5}(pT)^3 + \ldots + \binom{2k-1}{2k-1}(pT)^k$$
$$= \sum_{r=1}^{r=k} \binom{k+r-1}{2r-1}(pT)^r.$$

From elementary algebra it is known that:

$$\binom{a}{b} + \binom{a-1}{b} + \binom{a-2}{b} + \ldots + \binom{b}{b} = \binom{a+1}{b+1}$$

hence, applying this relation when summing all corresponding coefficients of $(pT)^k$,

$$\frac{E_0}{E_n} = \sum_{k=0}^{k=n} \phi_k = 1 + \binom{n+1}{2}(pT) + \binom{n+2}{4}(pT)^2 + \binom{n+3}{6}(pT)^3 + \ldots + \binom{n+n}{2n}(pT)^n$$
$$= \sum_{r=0}^{n} \binom{n+r}{2r}(pT)^r,$$

the familiar polynomial expressing the voltage transfer ratio in the analysis of the n-mesh RC filter network. Because of the linearity of the given network one may readily write down all n junction potentials in terms of E_n and thus express all possible driving point and transfer functions.

LOW-FREQUENCY CROSSTALK IN PULSE-PHASE MODULATION

By J. G. Little, B.Sc. (Eng.), A.M.I.E.E.

(Communication from the Staff of the Research Laboratories of the General Electric Company, Limited, Wembley, England.)

1. Introduction

In recent years several papers have dealt with the subject of crosstalk in pulse-amplitude (p.a.m.), pulse-width (p.w.m.) and pulse-phase (p.ph.m.) modulation systems. However, no satisfactory treatment of low-frequency crosstalk in pulse-phase modulation systems has yet appeared.

This was first discussed by Moskowitz, Diven, and Feit[1], who give a formula for the crosstalk when the time constant of the distorting network is short compared with the time interval between pulses. This was extended by Flood[2], who considers the case in which both disturbed and disturbing pulses are modulated. He also obtains an expression for crosstalk when the distorting time constant is long, by considering the effect upon the spectrum of the modulated pulses. It will be shown that this method is unsatisfactory in the case of pulse-phase modulation. Finally, Fagot[3] obtains an expression for crosstalk due to low-frequency distortion, but he makes conflicting approximations which invalidate his results.

MS accepted by the Editor, November 1954

LIST OF SYMBOLS

A	= pulse amplitude
C	= capacitance
dv/dt	= pulse slope at slicing level
f_m	= modulation frequency
f_r	= pulse repetition frequency
$J_n(x)$	= Bessel function of first kind of order n
k	= an integer
K	= RC = time constant of coupling
l	= pulse length
l_d	= peak time modulation
n	= an integer
R	= resistance
t	= time
t_1	= time deviation of a pulse
t_2	= separation of disturbed pulse from nearest disturbing pulse
t_3	= $1/f_r$ = repetition interval
ϕ	= phase angle of modulation
ω_m	= $2\pi f_m$ = angular modulation frequency

2. The Spectrum Approach

A circuit introducing low-frequency distortion will modify each component of the spectrum of a modulated pulse train. The effect of this will be the same as the addition to the pulse-train of a signal, each component of which is equal to the modification of the corresponding component in the spectrum of the pulse train. Crosstalk can be evaluated by considering the modification of those frequency components which involve the modulation frequency.

It can be shown that in pulse-amplitude and pulse-length modulation the only component whose modification is important from the point of view of crosstalk is the modulation-frequency component itself. It has been assumed by Flood[2] that this can be extended to pulse-phase modulation as well. This assumption will now be examined.

Consider the simple coupling circuit of Fig. 1. For a component of amplitude V_1 and frequency ω

$$V_2 = \frac{V_1 R}{R - j/\omega C}$$

$$= \frac{V_1(\omega^2K^2 + j\omega K)}{1 + \omega^2K^2} \text{ where } K = RC$$

$$\therefore V_2 - V_1 = \frac{V_1(-1 + j\omega K)}{1 + \omega^2K^2}$$

$$= \frac{jV_1}{\omega K} \text{ if } \omega K \gg 1 \quad .. \quad .. \quad (1)$$

Thus the distortion is inversely proportional to frequency.

If we assume that

$$x = 2\pi k l_d f_r \ll 1$$

Then $J_n(x) = \frac{x^n}{2^n n!}$

Also if $\pi l\,(kf_r + nf_m) \ll 1$

Then $\frac{\sin \pi l\,(kf_r + nf_m)}{kf_r + nf_m} = 1$

and equation (2) becomes:

$$F_1(t) = Alf_r\left\{ -\frac{l_d}{K} \cdot \sin(2\pi f_m t + \phi - \pi l f_m) - \sum_{k=1}^{\infty}\left[\frac{1}{\pi K k f_r} \cdot \sin 2\pi k f_r t \pm \frac{l_d}{K} \cdot \sin[2\pi(kf_r \pm f_m)t \pm \phi \mp \pi l f_m] \pm \frac{l_d}{K} \cdot \frac{\pi k l_d f_r}{2} \cdot \sin[2\pi(kf_r \pm 2f_m)t \pm 2\phi \mp 2\pi l f_m] \pm \ldots\right]\right\} \quad (3)$$

Since $2\pi k l_d f_r \ll 1$, the terms where $n > 1$ can be ignored relative to the remainder. The remaining terms which can cause crosstalk are those whose frequencies are f_m and $(kf_r \pm f_m)$. With the approximations which have been used, these all have the same amplitude $Alf_r l_d/K$. Thus it is incorrect to assume that crosstalk can be calculated by ignoring all components other than that of frequency f_m. A similar analysis for p.w.m. and p.a.m. shows that for these types of modulation the assumption is justified so long as $f_m \ll f_r$.



Fig. 1. *The simple RC-coupling circuit considered.*

Now the spectrum of a train of phase-modulated pulses is given by Fitch[4] as:

$$F(t) = Alf_r\left\{1 + 2\pi l_d f_m \cdot \frac{\sin \pi l f_m}{\pi l f_m} \cdot \cos(2\pi f_m t + \phi - \pi l f_m) + 2\sum_{\substack{k=1 \\ n=-\infty}}^{\infty} J_n(2\pi k l_d f_r) \cdot \frac{\sin \pi l\,(kf_r + nf_m)}{\pi k l f_r} \cdot \cos[2\pi(kf_r + nf_m)t + n\phi - \pi n l f_m]\right\}$$

From equation (1) the effect of the coupling circuit will be equivalent to adding to the pulse train a signal $F_1(t)$ where

$$F_1(t) = Alf_r\left\{1 - \frac{l_d}{K} \cdot \frac{\sin \pi l f_m}{\pi l f_m} \cdot \sin(2\pi f_m t + \phi - \pi l f_m) - 2\sum_{\substack{k=1 \\ n=-\infty}}^{\infty} \frac{J_n(2\pi\, k l_d\, f_r)}{2\pi\, K\,(kf_r + nf_m)} \cdot \frac{\sin \pi l\,(kf_r + nf_m)}{\pi k l f_r} \cdot \sin[2\pi(kf_r + nf_m)t + n\phi - \pi n l f_m]\right\} \quad (2)$$

Now $J_n(x) = \frac{x^n}{2^n n!}\left\{1 - \frac{x^2}{2(2n+2)} + \frac{x^4}{2.4\,(2n+2)(2n+4)} - \ldots\ldots\ldots\right\}$

3. The Waveform Approach

A better method of approach is to consider the distortion of the waveform of a single pulse, and then to sum the effects of all preceding disturbing pulses upon a given disturbed pulse.

In Fig. 2(a) a rectangular pulse is shown. Fig. 2(b) shows the same pulse after transmission through the network of Fig. 1. The amplitude of the 'tail' of the distorted pulse is

$$v_0(t) = -Ae^{-t/K}(e^{-l/K} - 1) \quad \text{where } K = RC$$
$$= -\frac{Al}{K} \cdot e^{-t/K} \text{ if } l \ll K \quad .. \quad .. \quad (4)$$

If the pulse of Fig. 2 (b) is displaced so that its trailing edge occurs at time t_1, equation (4) becomes

$$v_1(t) = -\frac{Al}{K} \cdot e^{-(t-t_1)/K}$$

and the amplitude change in the 'tail' due to this displacement is

$$v(t) = v_1(t) - v_0(t) = \frac{-Al}{K}[e^{-(t-t_1)/K} - e^{-t/K}]$$
$$= -\frac{Al}{K} \cdot e^{-t/K}(e^{t_1/K} - 1)$$
$$= -\frac{Alt_1}{K^2} \cdot e^{-t/K} \quad \text{if } t_1 \ll K \quad .. \quad (5)$$

Now let us consider a train of modulated pulses, and the sum of their effects upon a single unmodulated pulse.

Let $t_1 = l_d \exp. j(-nt_3\omega_m + \phi)$

$t = t_2 + nt_3$

where t_2 = separation of disturbed pulse from nearest disturbing pulse

$t_3 = 1/f_r$ = repetition interval

l_d = peak time modulation

ω_m = angular modulation frequency

ϕ = modulation phase angle

n = an integer

The sum of the disturbing voltages at time t_2 due to all preceding modulated pulses is given by:

$$v_{t_2} = \sum_{n=0}^{\infty} -\frac{All_d}{K^2} \cdot \exp. j(-nt_3\omega_m + \phi) \cdot \exp. -\frac{1}{K}(t_2 + nt_3)$$

$$= -\frac{All_d}{K^2} \cdot e^{-t_2/K} \cdot e^{j\phi} \cdot \sum_{n=0}^{\infty} \exp. -nt_3\left(j\omega_m + \frac{1}{K}\right)$$

This is the sum to infinity of a geometric progression.

$$\therefore v_{t_2} = -\frac{All_d}{K^2} \cdot e^{-t_2/K} \cdot e^{j\phi} \cdot \frac{1}{1 - \exp. -t_3(j\omega_m + 1/K)}$$
$$= -\frac{All_d}{K^2} \cdot e^{-t_2/K} \cdot e^{j\phi} \cdot \frac{1 - e^{-t_3/K}(\cos \omega_m t_3 + j \sin \omega_m t_3)}{1 + e^{-2t_3/K} - 2e^{-t_3/K} \cdot \cos \omega_m t_3}$$

Thus the crosstalk voltage v_{t_2} is sinusoidal, having an angular frequency ω_m and amplitude

$$V_{t_2} = \frac{All_d}{K^2} \cdot e^{-t_2/K} \cdot \frac{[(1 - e^{-t_3/K}\cos \omega_m t_3)^2 + (e^{-t_3/K} \sin \omega_m t_3)^2]^{\frac{1}{2}}}{1 + e^{-2t_3/K} - 2e^{-t_3/K} \cdot \cos \omega_m t_3}$$
$$= \frac{All_d}{K^2} \cdot e^{-t_2/K}(1 + e^{-2t_3/K} - 2e^{-t_3/K}\cos \omega_m t_3)^{-\frac{1}{2}}$$
$$.. \quad .. \quad (6)$$

This voltage will be superimposed on the pulse, causing amplitude modulation, and this will be converted into time modulation of the pulse flank by any slicing or squaring process. If the slope of the pulse at slicing level is dv/dt, then:

$$\frac{\text{signal amplitude}}{\text{crosstalk amplitude}} = \frac{l_d}{\delta t} = \frac{l_d}{V_{t_2} \cdot dt/dv}$$
$$= \frac{dv}{dt} \cdot \frac{K^2 e^{t_2/K}}{Al} \cdot (1 + e^{-2t_3/K} - 2e^{-t_3/K} \cdot \cos \omega_m t_3)^{\frac{1}{2}} \quad (7)$$

If $\omega_m \ll 1/t_3$

$$\frac{ld}{\delta t} = \frac{dv}{dt} \cdot \frac{K^2 e^{t_2/K}}{Al} \cdot (1 - e^{-t_3/K}) \quad .. \quad .. \quad (8)$$

If $K \ll t_3$

$$\frac{ld}{\delta t} = \frac{dv}{dt} \cdot \frac{K^2 e^{t_2/K}}{Al} \quad .. \quad .. \quad .. \quad (9)$$

This last result can be obtained from equation (23) of Reference 2, by letting $l \ll K$.

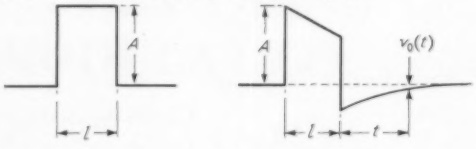

(a) (b)

Fig. 2. *Pulse waveform (a) and its shape after an RC-coupling circuit (b).*

If we take the particular case in which the pulse shape is a 'raised cosine',

i.e., $v = 0$ for $-\infty < t < -l$ and $l < t < \infty$

$$v = \frac{A}{2}(1 + \cos \frac{\pi t}{l}) \quad \text{for } -l < t < l$$

Then the maximum slope is at half height, where $\frac{dv}{dt} = \frac{\pi A}{2l}$

Substituting in equation (7)

$$\therefore \frac{ld}{\delta t} = \frac{\pi K^2 e^{t_2/K}}{2l^2} \cdot (1 + e^{-2t_3/K} - 2e^{-t_3/K}\cos \omega_m t_3)^{\frac{1}{2}} \quad (9)$$

These results are only correct for a single distorting network of the nature of a coupling or decoupling circuit. Unfortunately, they cannot easily be

extended to several such networks in successive stages of an amplifier, owing to the fact that the pulse 'tail' is no longer exponential, for the addition of the contributions of the various disturbing pulses becomes more difficult. However, they do give a guide to the order of low-frequency response necessary in such cases for the attainment of a given quality of transmission.

REFERENCES

[1] S. Moskowitz, L. Diven, and L. Feit: "Crosstalk Considerations in Time-Division Multiplex Systems", *Proc. Inst. Radio Engrs*, 1950, Vol. 38, p. 1330.

[2] J. E. Flood: "Crosstalk in Time-Division-Multiplex Communication Systems using Pulse-Position and Pulse-Length Modulation", *Proc. Instn elect. Engrs*, 1952, Vol. 99, Pt. IV, p. 64.

[3] J. Fagot: "The Various Causes of Crosstalk in Multiplex Pulse Systems", *Annales de Radioélectricité*, Oct. 1953, Vol. 8, No. 34, p. 267.

[4] E. Fitch: "The Spectrum of Modulated Pulses", *J. Instn elect. Engrs*, 1947, Vol. 94, Part IIIA, p. 556.

RADIATION FROM AERIALS

By Giorgio Barzilai*

(Polytechnic Institute of Brooklyn, New York.)

SUMMARY.—A formal expression for the complex power radiated by a thin, centre-driven aerial is derived in terms of the vector potential on the surface of the conductor, making no assumption on the distribution of current. A similar expression is then obtained for the complex power radiated by the same aerial, on the assumption of sinusoidal-current distribution. By letting the radius of the conductor approach zero, the asymptotic forms of the two aforesaid expressions are compared.

1. Introduction

It has been known for more than half a century[1,2,3] that, on thin conducting wires, energized at one point by a sinusoidal e.m.f., the current distribution is approximately sinusoidal. The sinusoidal approximation has been used by several authors[4,5,6] to compute the real and reactive power radiated by a thin centre-driven aerial. The method calls for the calculation of the tangential component of the electric field on the surface of the aerial. Schelkunoff has called this approach a radiation paradox, since the tangential electric field on the surface of the conductor, computed on the assumption of sinusoidal current, is inconsistent with the values imposed by the metallic boundaries.

The legitimacy of the said method of calculation has been discussed in the literature[8-13]. For the real power radiated by the aerial the method can be easily justified, at least asymptotically for infinitely thin wires. Less simple, and not usually discussed, is the question relative to the reactive power.

It is the purpose of this paper to derive a formal expression for the complex power radiated by a thin, centre-driven, perfectly conducting aerial, making no assumption on the distribution of current. A similar expression is then obtained for the complex power radiated by the same aerial, on the assumption of sinusoidal current distribution. By letting the radius of the conductor approach zero, the asymptotic forms of the two aforesaid expressions will be compared.

* At present at Istituto Superiore P.T., Fondazione U. Bordoni, Roma.

MS accepted by the Editor, September 1954

2. Statement of the Problem

The aerial in Fig. 1 is assumed to be perfectly conducting, and of circular cross-section. The applied voltage V_0 is assumed to act through the gap d of infinitesimal length. We have

$$E_z = -V_0\delta(z) \qquad (1)$$

where $E_z = E_z(z)$ is the tangential electric field on the surface of the aerial, and $\delta(z)$ is the Dirac function.

In the following we shall indicate with $I = I(z)$ the current in the aerial, and we shall assume

$$I(\pm h) = 0 \qquad (2)$$



Fig. 1. *Geometry of a centre-driven cylindrical aerial.*

The complex power P radiated can be expressed as follows

$$P = -\int_{-h}^{+h} E_z I^* \, dz = V_0 I^*(0) \qquad (3)$$

where the asterisk indicates the complex conjugate, and use has been made of the r.m.s. values.

If now we assume sinusoidal current distribution, the complex radiated power will be expressed by the integral

$$P_s = -\int_{-h}^{+h} E_z, {}_s I_m \sin\theta \, dz \qquad (4)$$

where I_m is the maximum amplitude of the sine wave, $\theta = k(h - |z|)$, $k = 2\pi/\lambda$, λ is the wave-

length, and the index s has been added to indicate that the relative quantities refer to sinusoidal current distribution.

Formulae to compute $E_{z,s}$ are given in the literature[14].

Our aim is to find analytical expressions for P and P_s which are suitable for comparison.

3. Formal Solution for the Current

With reference to Fig. 1 we have

$$-V_0\delta(z) = -j\omega\mu A - \frac{dV}{dz} \quad .. \quad (5)$$

$$\frac{dA}{dz} = -j\omega\epsilon V \quad .. \quad .. \quad .. \quad (6)$$

where $A = A(z)$ and $V = V(z)$ are vector and scalar potentials on the surface of the aerial†, ω is the angular frequency, and ϵ and μ are the dielectric constant and the magnetic permeability of the medium surrounding the aerial.

From (5) and (6) we obtain

$$A = B\cos\theta + C\sin\theta \quad .. \quad .. \quad (7)$$

$$V = j\eta\,[B\sin\theta - C\cos\theta]\,\epsilon(z) \quad .. \quad (8)$$

where $\eta = \sqrt{\mu/\epsilon} \approx 120\pi$, for free space.

$$\epsilon(z) = \begin{matrix} +1 & z > 0 \\ -1 & z < 0 \end{matrix},$$

and B and C are constants of integration.

On the other hand the integral expression of A in terms of I is well known. Equating this expression to the right-hand side of (7) we obtain the following integral equation for the current

$$\frac{1}{4\pi}\int_{-h}^{+h} G(z, z')\,I(z')\,dz' = B\cos\theta + C\sin\theta \quad (9)$$

$$G(z, z') = \frac{1}{2\pi}\int_0^{2\pi} \frac{e^{-jkr}}{r}\,d\alpha \quad .. \quad .. \quad (10)$$

$$r = [(z - z')^2 + 2a^2(1 - \cos\alpha)]^{1/2}$$

Equation (9), with a simplified kernel, has been solved by Hallèn[15,16], in terms of the applied voltage V_0. In our case it is more convenient to prescribe the current $I(z_0)$ in an arbitrary point $z = z_0$. V_0 will therefore become an unknown quantity.

It can be shown that the integral on the left of (9) can be written as follows

$$A(z) = \frac{1}{4\pi}\,[\Omega I(z) + f(z)] \quad .. \quad .. \quad (11)$$

$$\Omega = 2\log_e\frac{2h}{a}$$

In (11), $f(z)$ is a function dependent upon the current distribution, and therefore generally unknown, but it is continuous at $a = 0$.

We shall now express the constants B and C in (7) and (8), in terms of the vector potentials at $z = h$ and $z = z_0$. Taking into account (11) we obtain

$$B = A(h) \qquad C = \frac{1}{4\pi}[I_m\Omega + \phi(z_0)] \quad .. \quad (12)$$

where we put

$$I_m = \frac{I(z_0)}{\sin\theta_0};\quad \phi(z_0) = \frac{f(z_0) - f(h)\cos\theta_0}{\sin\theta_0} \quad (13)$$

and $\theta_0 = k(h - |z_0|) \neq (n+1)\pi$, $n = 0, 1, 2, \ldots$

Upon taking into account (11) and (12), (9) can be formally solved as follows

$$I(z) = I_m\sin\theta + \frac{1}{\Omega}[f(h)\cos\theta - f(z) + \phi(z_0)\sin\theta]$$

$$= I_s(z) + I_c(z) \quad .. \quad .. \quad .. \quad (14)$$

The current $I(z)$ can be thought of as the sum of two components: a sinusoidal principal current

$$I_s(z) = I_m\sin\theta, \quad .. \quad .. \quad .. \quad (15)$$

and a complementary current $I_c(z)$, whose definition follows from (14) and (15).

In virtue of the continuity of $f(z)$ at $a = 0$, from (14) it follows that

$$\lim_{a\to 0} I(z) = I_m\sin\theta \quad .. \quad .. \quad (16)$$

It is emphasized that, as Aharoni points out[17], it would be incorrect to conclude from (16) that (15) is the asymptotic solution of (9) for $a \to 0$. The complementary current, in fact, brings a significant contribution to the integral in (9), even in the limit for $a \to 0$. This can be easily proved by inserting (14) into (9) and then taking the limit for $a \to 0$. The details of the proof are evident if one notices that

$$\lim_{a\to 0}\int_{-h}^{+h} G(z, z')\,\frac{f(z')}{\Omega}\,dz'$$

$$= \lim_{a\to 0}\int_{-h}^{+h} \frac{e^{-jkr_0}}{\Omega r_0}\,f(z')\,dz' = f_s(z)$$

where we put

$$r_0 = [(z - z')^2 + a^2]^{1/2}$$

$$\lim_{a\to 0} f(z) = f_s(z) \quad .. \quad .. \quad .. \quad (17)$$

In virtue of the continuity of $f(z)$ at $a = 0$, an explicit expression[18] for $f_s(z)$ can be found from the definition (11), assuming the current distribution (15). The approximation made on the kernel (10) causes, as Schelkunoff points out[19], an error in the evaluation of the integral of the order of a^2.

4. Analytical Expressions for P and P_s

To compute the power P we recall that

$$V_0 = 2V(0^+) \quad .. \quad .. \quad .. \quad (18)$$

where $V(0^+)$ is the value approached by $V(z)$, when $z \to 0$ from the positive side. (18) follows from (5) if this equation is integrated with

† Because of the one dimensional character of the problem the vector potential can be treated as a scalar quantity.

respect to z from $-b$ to $+b$, and then the limit is taken for $b \to 0$. Using (3), (8), (18), (13) and (14), we obtain

$$P = 2V(0^+)\, I^*(0) = 2jI_m\eta \left\{ A(h) - \left[A(0) + \frac{\Omega}{4\pi} I_c^*(0) \right] \cos kh + \frac{H}{\Omega} \right\} \quad .. \quad .. \quad .. \quad (19)$$

where $I_c(0)$ is the value of the complementary current at $z = 0$, and H is a function continuous at $a = 0$.

It is easy to cast the power P_s in a form suitable for our purposes. From (4) we obtain

$$P_s = I_m \int_{-h}^{+h} \left[j\omega\mu A_s + \frac{dV_s}{dz} \right] \sin\theta \, dz = 2jI_m\eta \left[A_s(h) - A_s(0) \cos kh \right] \quad .. \quad .. \quad .. \quad (20)$$

where the index s refers to quantities computed using (15), and the last step in (20) is easily justified by integrating by parts the second integral on the right, twice, first with respect to $(dV_s/dz)dz$, and then with respect to $V_s dz$. In performing this integration we have to recall (6), and to notice that $(d|z|/dz) = \epsilon(z)$, $(d\epsilon(z)/dz) = 2\delta(z)$, and that A_s and V_s are respectively even and odd functions of z. The result (20) can also be obtained by simple inspection of the integral expression (4), if in place of $E_{z,s}$ we substitute the expression for this quantity obtained from the well-known formulae [14] for the field of a sinusoidal filament of current.

By comparing (19) and (20) and keeping in mind (14) and (15), we can write

$$P = P_s - j\Omega\frac{\eta}{\pi} \operatorname{Re} I_c(0) \cos kh + \frac{H'}{\Omega} \quad .. \quad (21)$$

where H' is a function of a, continuous at $a = 0$. From (21) we can conclude that asymptotically when $a = 0$

$$P = P_s \qquad \text{if } kh = (2n+1)\frac{\pi}{2} \qquad (22)$$

$$P = P_s \qquad \text{if } kh = (n+1)\pi \qquad (23)$$

$$\operatorname{Re} P = \operatorname{Re} P_s \qquad \text{if } kh \neq n\frac{\pi}{2} \quad .. \quad (24)$$

$$\operatorname{Img} P \begin{matrix} = \\ \neq \end{matrix} \operatorname{Img} P_s \quad \begin{matrix} z_0 = 0 \\ z_0 \neq 0 \end{matrix}$$

Where Re and Img indicate the real and imaginary parts respectively and $n = 0, 1, 2, \ldots$

The result (22) has been obtained numerically for $n = 0$, and $n = 1$ using Hallèn's expansion[20]. The result (23), which is the typical relationship between input and output power in a uniform transmission line of length $\lambda/4$, can be derived from Schelkunoff's theory[7].

The result (24) states that when $kh \neq n\pi/2$ the difference between the reactive powers approaches zero when $a \to 0$, only if the current on the aerial is prescribed at the input terminals; i.e., $I_c(0) = 0$. In this case, however, both reactive powers approach infinity.

REFERENCES

[1] H. C. Pocklington, "Electrical Oscillations in Wires", *Proc. Camb. Phil. Soc.*, 25th October 1897, Vol. 9, pp. 324–332.

[2] F. E. Pidduck, "Current in Aerials and High Frequency Networks", Oxford University Press, 1946, pp. 6–10.

[3] G. W. O. H.: Editorial, Dr. H. C. Pocklington, *Wireless Engineer*, October 1952, Vol. 29, No. 349, pp. 255–256.

[4] A. A. Pistolkors, "The Radiation Resistance of Beam Antennas", *Proc. Inst. Radio Engrs*, March 1929, Vol. 17, pp. 562–579.

[5] P. S. Carter, "Circuit Relations in Radiating Systems and Applications to Antenna Problems", *Proc. Inst. Radio Engrs*, June 1932, Vol. 20, pp. 1004–1041.

[6] J. Labus, "Rechnerische Ermittlung des Impedanz von Antennen", *Hochfrequenz und Elektroakustik*, 1933, Bd41, pp. 17–23.

[7] S. A. Schelkunoff, "Theory of Antennas of Arbitrary Size and Shape", *Proc. Inst. Radio Engrs*, Sept. 1941, Vol. 29, pp. 493–521.

[8] J. C. Slater, "Microwave Transmission", McGraw-Hill Book Co., 1942, pp. 219–232.

[9] L. Brillouin, "The Antenna Problem", *Quarterly of Applied Mathematics* (Brown University), April 1943–Jan. 1944, p. 354.

[10] R. E. Burgess, "Aerial Characteristics," *Wireless Engineer*, April 1944, Vol. 21, p. 154.

[11] L. Brillouin, "Antennae for Ultra-high Frequencies, Wide-band Antennae", *Elect. Communication*, 1944, Vol. 22, pp. 11–39.

[12] G. Barzilai, and B. Peroni, "Considerazioni sulla Irradiazione delle Antenne", *Ricerca Scientifica e Ricostruzione*, Anno 16, 5–6, Maggio-Giugno 1946.

[13] S. A. Schelkunoff and H. T. Friis, "Antennas—Theory and Practice", John Wiley and Sons, 1952, p. 373 and pp. 407–408.

[14] S. A. Schelkunoff, "Electromagnetic Waves", D. Van Nostrand Co., 1943, pp. 368–373.

[15] E. Hallèn, "Theoretical Investigations into the Transmitting and Receiving Qualities of Antennas", *Nove Acta* (*Uppsala*), 1938, Vol. 11, No. 4.

[16] C. J. Bouwkamp, "Hallèn's Theory for a Straight Perfectly Conducting Wire, Used as Transmitting or Receiving Aerial", *Physica*, July 1942, Vol. 9, pp. 609–631.

[17] J. Aharoni, "Antennae", Oxford University Press, 1946, p. 160.

[18] R. King and D. Middleton, "The Cylindrical Antenna: Current and Impedance", *Quarterly of Applied Mathematics* (Brown University), Jan. 1946, Vol. 3, No. 4, pp. 302–335.

[19] S. A. Schelkunoff, "Advanced Antenna Theory", John Wiley and Sons, 1952, pp. 149–150.

[20] J. Aharoni: loc. cit., p. 159.

CORRECTION

In the June Editorial it was stated that a breakdown in any one of the individual transmitters at the B.B.C. f.m. stations would cause a reduction of signal strength of only 3 db. This figure should be 6 db, since one-half of the power is then radiated by only one-half of the aerial and the resulting reduction of aerial gain produces an extra 3-db loss. Similarly, a fault in one-half of the aerial will cause a 6-db drop in the signals for all three programmes, since it not only halves the aerial gain but makes three transmitters ineffective.

POST OFFICE APPOINTMENTS

Sir Gordon Radley has been appointed Director-General of the Post Office in succession to Sir Alexander Little. He is the first engineer to become Director-General.

R. J. P. Harvey and S. D. Sargent have been appointed Deputy Directors-General in succession to Sir Gordon Radley and Sir Dudley Lumley.

NEW BOOKS

Transistor Audio Amplifiers

By RICHARD F. SHEA. Pp. 219 + xiii. Chapman & Hall Ltd., 37 Essex Street, London, W.C.2. Price 52s.

The outstanding feature of this book is that it is so much more practical in its outlook than most books dealing with transistors. It is confined to the junction transistor at audio frequencies. There is a short introductory chapter on theoretical matters and then a lengthy one on transistor parameters. These are derived from the conventional black box and with them some equivalent circuits.

The parameters and equivalent circuit which are chiefly used in the book are not the usual ones. The so-called *h* parameters are used with an equivalent circuit comprising a pair of resistances, a collector circuit constant-current generator and an input-circuit constant-voltage generator. It is claimed that these *h* parameters are not only easier to measure but are less affected by changes of operating conditions than others. The nomenclature, however, is obviously inconvenient, when the same letter with only different subscripts stands for resistance and also for dimensionless quantities, such as current and voltage amplification factors. Some 48 pages in Chapter 2 are devoted to tabulated data on American junction transistors.

Chapter 3 deals with basic amplifier design and Chapter 4 with multi-stage amplifiers. Chapter 5 is entitled "Preamplifiers" and deals with a diversity of subjects, such as noise, impedance considerations, the effect of frequency and gain control. This last well illustrates the practical outlook of the book, for quite a bit of space is devoted to matters which are important in practice, but which are often overlooked in purely theoretical discussions. Chapters 6 and 7 are devoted to power amplification, both class A and class B, and the final chapter is descriptive and, to some extent analytic, of some complete amplifier designs.

Throughout the book the importance of stabilizing the operating point and of temperature are kept well to the fore. It is a book which will undoubtedly be of considerable use to amplifier designers.

W. T. C.

Servomechanism Practice

By WILLIAM R. AHRENDT. Pp. 349 + vii. McGraw-Hill Publishing Co. Ltd., 95 Farringdon Street, London, E.C.4. Price 50s.

This book is of an elementary character and is almost entirely devoid of mathematics. The outlook is practical rather than theoretical. After an introductory chapter, descriptive of a simple servomechanism, there are two chapters describing the physical form and characteristics of potentiometers and synchros. Chapters on double-speed synchronization; demodulators and modulators; network and various amplifiers (electronic, magnetic, rotating) follow. Other chapters cover rate generators, servomotors and hydraulic systems. There is a chapter on design and one on manufacture.

The general form of treatment is descriptive and the book forms a useful introduction to the subject.

W. T. C.

Remote Control by Radio (2nd Edition)

By A. H. BRUINSMA. Philips' Technical Library, Popular Series. Pp. 97 + viii. Cleaver-Hume Press Ltd., 31 Wright's Lane, Kensington, London, W.8. Price 8s. 6d.

Precision Electrical Measurements

Proceedings of a Symposium held at the National Physical Laboratory, 17th–20th November 1954. Pp. 329 + xxii. H.M. Stationery Office, York House, Kingsway, London, W.C.2. Price 27s. 6d.

CABMA Register of British Products and Canadian Distributors, 1955-56.

Pp. 760. Published jointly by Kelly's Directories Ltd. and Iliffe & Sons Ltd. for the Canadian Association of British Manufacturers and Agencies. Obtainable in the U.K. from Iliffe & Sons, Dorset House, Stamford Street, London, S.E.1, price 44s.; in Canada, from Managers of British Trade Centres: Royal Bank Building, Toronto; Arrowhead Building, Montreal; and Hall Building, Vancouver.

In its Buyers' Guide, this book provides an alphabetical list of some 4,000 British products available to the Canadian market, together with their suppliers. French equivalents of the headings are listed in a separate Glossary. There is also a directory of 4,500 British firms with details of their Canadian distribution arrangements. A further section enables products to be identified from proprietary names and trade marks.

STANDARD-FREQUENCY TRANSMISSIONS

(Communication from the National Physical Laboratory)

Values for June 1955

Date 1955 June	Frequency deviation from nominal: parts in 10^8		Lead of MSF impulses on GBR 1000 G.M.T. time signal in milliseconds
	MSF 60 kc/s 1429-1530 G.M.T.	Droitwich 200 kc/s 1030 G.M.T.	
1	+0·4	+1	−8·8
2	+0·5	+1	−7·2
3	+0·5	+1	−7·8
4	+0·5	+2	NM
5	+0·5	0	NM
6	+0·4	+2	NM
7	+0·4	+2	NM
8	+0·4	+1	NM
9	+0·5	+1	−4·2
10	+0·5	+1	−2·9
11	+0·5	+1	NM
12	+0·5	+1	NM
13	+0·5	+1	−0·7
14	+0·5	+1	−0·3
15	+0·5	+1	−0·2
16	+0·5	0	NM
17	+0·5	+1	NM
18	NM	+1	NM
19	NM	+1	NM
20	−0·2	+2	+5·7
21	−0·3	+1	+4·1
22	−0·3	+1	+4·4
23	−0·3	+1	+2·6
24	−0·3	+1	+5·7
25	NM	+1	NM
26	NM	+1	NM
27	−0·2	+1	+7·3
28	−0·2	+2	+7·7
29	−0·2	+2	+8·2
30	−0·3	+1	+6·2

The values are based on astronomical data available on 1st July 1955.
NM = Not Measured.

Change in MSF pulse modulation: From the 1st July 1955 the 60th pulse in each minute of pulse modulation is lengthened from 5 msec to 100 msec and the 59th pulse, previously suppressed, is restored.

The *improved*

EDISWAN

STABILISED POWER SUPPLY UNIT TYPE R.1103A

PRICE REMAINS UNALTERED AT £57. 0. 0 NETT.

An improved version of the Ediswan Stabilised power supply unit type R1103 is now available. The R.1103A provides an additional fixed unstabilised D.C. output of between 515 and 670 volts and its characteristics have been improved in two ways:—

(1) Voltage range increased to 200V.–400V. (Previous minimum 250 volts.)

(2) Full load current of 200 mA. can now be taken at all output voltages. (Previously limited to 150 mA. above 350 volts.)

BRIEF SPECIFICATION:

INPUT.—200–250 volts 40–100 c.p.s.

OUTPUT.—High stability D.C. output 200–400 volts adjustable in three ranges. In addition, a fixed unstabilised output of 515–670 volts and two unstabilised 6.3 volt A.C. heater supplies are provided.

LOAD.—Maximum 200 mA.

STABILITY.—A 10 volt change in mains input voltage results in an output change of less than 0.15 volts. A change from zero to full load results in an output change of less than 0.5 volts.

OUTPUT RESISTANCE.—Less than 3 ohms.

RIPPLE.—Approximately 5 mV. R.M.S.

OUTPUT CIRCUITS.—All circuits isolated from earth. Heater supplies can be operated at up to 500 volts from earth.

MOUNTING.—The unit is designed for standard rack mounting or bench use.

Further information on this and other Ediswan Stabilised Power Units available on request.

THE EDISON SWAN ELECTRIC COMPANY LIMITED

Member of the A.E.I. Group of Companies

155 Charing Cross Road, London, W.C.2 and Branches *Telephone: Gerrard 8660. Telegrams: Ediswan, Westcent, London*

S.P.116

THIS INTERESTING QUARTERLY WILL BE MAILED FREE TO ANY PART OF THE WORLD

For almost a century Muirhead & Co. Limited have manufactured precision electrical instruments, and to-day the range of products include measuring instruments for education and industry, synchros and remote control systems and facsimile transmitters and recorders.

Each issue of "Technique" contains details of the newest Muirhead products and of scientific developments in which Muirhead instruments have played an important part. If you think this publication would interest you, we shall be pleased to place your name on our mailing list. Write under your business letterhead to the address given below.

MUIRHEAD

PRECISION ELECTRICAL INSTRUMENTS

136

MUIRHEAD & CO. LIMITED · BECKENHAM · KENT · ENGLAND

McMURDO STANDARD CONNECTORS

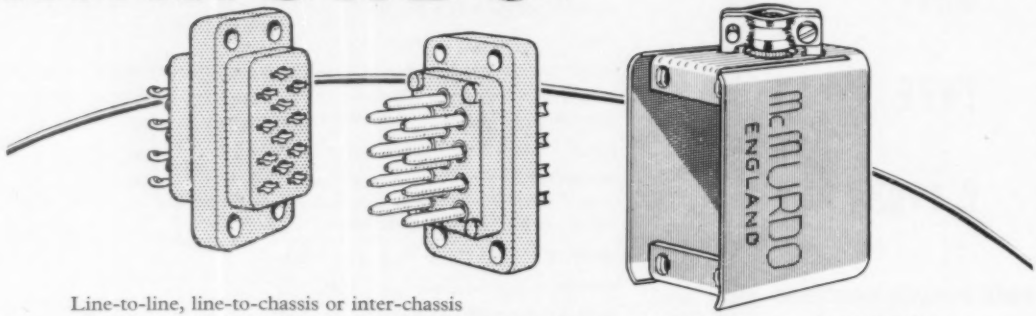

Line-to-line, line-to-chassis or inter-chassis connectors. Adequate contact "float" allows for slight mis-alignment of male or female units. Sockets fitted with McMurdo No. 9 Octal valveholder contacts which have proved their reliability on many jobs. Low contact resistance with reasonable insertion and withdrawal forces. Life tests prove that low contact resistance persists through more than 5,000 insertions. AVAILABLE IN 8, 12, 18 AND 25 WAY ALSO COVERS WITH TOP SIDE OR END CABLE ENTRY.

For full details apply to:—

THE McMURDO INSTRUMENT COMPANY LTD. Victoria Works, Ashtead, Surrey. Tel.: Ashtead 3401

good magnetic characteristics *demand* THOROUGH MECHANICAL INSPECTION

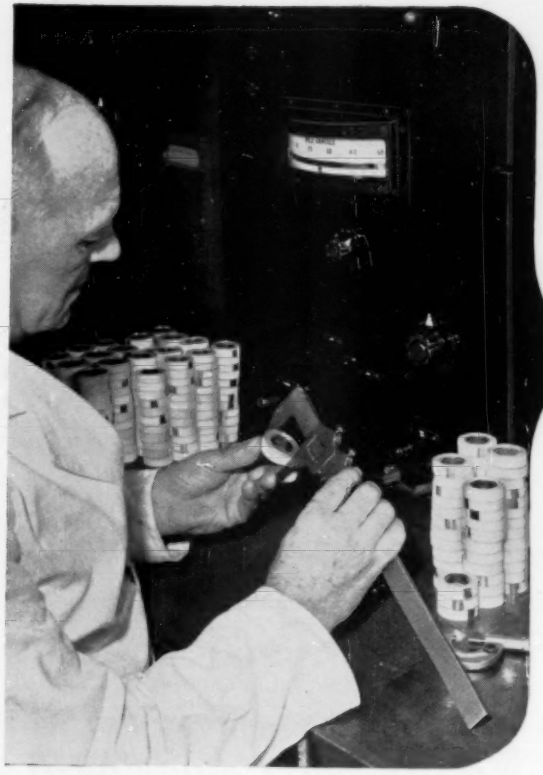

Standard **maintains its established leadership in the manufacture of high permeability magnetic alloys by constant vigilance in the control of each and every production process, one of which is illustrated here. Produced by a Company which has the unique advantage of being a large-scale user of its own magnetic materials, a long experience of the applications of these materials gives full appreciation of the properties essential for uniform electrical characteristics and stable performance.**

It will pay you to investigate the capabilities of *Standard* magnetic alloys with relation to your specific requirements.

- PERMALLOY 'C' for highest initial permeability, useful for wide-band frequency transformers, current transformers, chokes, relays and magnetic shielding.
- PERMALLOY 'B' has lower initial permeability than Permalloy 'C' but higher values of flux density. Suitable where high permeability to alternating field is required superimposed upon a steady polarising field.
- PERMALLOY 'D' for very high resistivity without undue lowering of the maximum flux density. Variation of permeability with frequency is small. Ideal for H.F. applications.
- PERMALLOY 'F' for high flux density, very rectangular hysteresis loop, with a retentivity of at least 95% of its saturation value and low coercive force. Ideal for saturable reactors, magnetic amplifiers, digital computors, memory devices, etc.
- V-PERMENDUR for high permeability with a very high value of maximum flux density. Finds special application for use as high quality receiver diaphragms, also motor generators and servo-mechanisms in aircraft where weight and volume are important factors.

Standard Telephones and Cables Limited

Registered Office: Connaught House, Aldwych, W.C.2

TELEPHONE LINE DIVISION: North Woolwich, London, E.16

1 Megohm/Volt

The **UNIQUE** Instrument

TRANS RANGER

- Independence from mains voltage
- Very high input resistance
- Equipped with D.C. Transistor amplifier
- No current drain—instant readings

This multi-range transistor voltmeter is the *first* instrument of its kind to measure true open circuit voltages in high resistance circuits—having a resistance of one megohm per volt. Independence from valve maintenance results in the instrument being immediately ready for operation, no warming up period being necessary. Complete specification will be supplied on request.

Circuit covered by British patent No. 710514.

BRITISH PHYSICAL LABORATORIES

Radlett, HERTS Tel: RADLETT 5674/5/6

dm BP. 47

Quartz Crystals of any shape and size cut and ground precisely to specification and coated, if required, with Gold, Silver, Aluminium or Rhodium, etc.

BROOKES

Brookes Crystals Ltd.

Suppliers to Ministry of Supply, Home Office, B.B.C., etc.

181/3 TRAFALGAR ROAD, LONDON, S.E.10

Phone: GREenwich 1828 *Grams:* Xtals, Green, London

Excellence in design...

Specialists in Sub-miniature Telecommunication Components



Actual Size

CIRCULAR STAND-OFF INSULATOR

1,000 Volts working—·5pF capacity to earth
Diameter ·5″—Height ·35″
Fixing hole diameter ·12″

OXLEY

DEVELOPMENTS CO. LTD.

ULVERSTON NORTH LANCS *Tel:* Ulverston 3306

A *New* MARCONI FM SIGNAL GENERATOR

TYPE TF 1077/2

FREQUENCY RANGE 19.7 to 102.5 Mc/s DEVIATION up to 100 kc/s

"MARCONI INSTRUMENTATION"

a technical bulletin published quarterly, is freely available on request. Ask for your name to be placed on the mailing list.

MARCONI INSTRUMENTS

SIGNAL GENERATORS · BRIDGES · VALVE VOLTMETERS · Q METERS · WAVEMETERS
FREQUENCY STANDARDS · WAVE ANALYSERS · BEAT FREQUENCY OSCILLATORS

MARCONI INSTRUMENTS LTD · ST. ALBANS · HERTS · Telephone: ST. ALBANS 6160/9

30 Albion Street, Kingston-upon-Hull. Phone: Hull Central 16144. 19 The Parade, Leamington Spa. Phone: 1408

Managing Agents in Export:
MARCONI'S WIRELESS TELEGRAPH CO. LTD. · MARCONI HOUSE, STRAND, LONDON, W.C.2.

TC 66

BEAT FREQUENCY OSCILLATOR type 1012

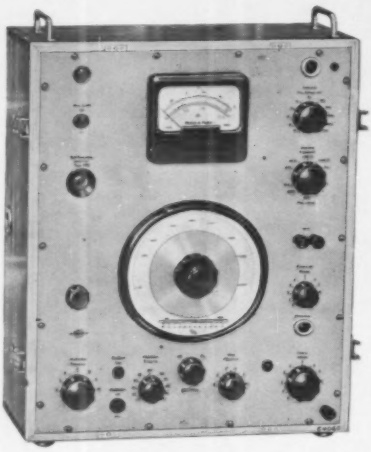

This versatile audio-signal generator is designed to meet the many and varied requirements of a signal source in Electrical, Electro-Acoustical and Acoustical Measurements.

Outstanding Features.

Large illuminated scale, for the frequency range 20 c/s - 20 kc/s according to C C I standards.

Incremental scale, for exact frequency selection over the range − 50 to + 50 c/s.

Two separate output controls, one giving impedance matching, the second via a 100db. calibrated attenuator, variable in steps of 10db.

Built-in compressor, for regulation, allowing measurements with constant voltage or current, or, using a feedback microphone, constant sound-pressure.

Warble-tone, of variable modulation frequency and band-width for acoustical measurements.

Provision for mechanical coupling to the **High-Speed Level Recorder, type 2304,** making fully automatic frequency response measurements possible.

For **SALES AND SERVICE** *in United Kingdom, please write to*

ROCKE INTERNATIONAL LTD.
59 Union Street, London, S. E. 1.
Tel.: HOP 4567

B K

Brüel & Kjær

Adr. Nærum, Denmark . Telephone: Nærum 500 . Cable: Brukja, Copenhagen

CARPENTER POLARIZED RELAYS



have these outstanding features

HIGH OPERATIONAL SPEED • HIGH SENSITIVITY
FREEDOM FROM CONTACT REBOUND
NO POSITIONAL ERROR • HIGH CONTACT PRESSURES
EXCEPTIONAL THERMAL STABILITY • EASE OF ADJUSTMENT • ACCURACY OF SIGNAL REPETITION





The Carpenter Polarized Relay will respond to weak, ill-defined or short-duration impulses of differing polarity, or it will follow weak alternating current inputs of high frequencies and so provide a continuously operating symmetrical changeover switch between two different sources. Five basic types are available with a wide range of single and multiple windings. Particulars of the type best suited to your purpose will be gladly supplied if you will send us your circuit details.

Manufactured by the sole licensees

TELEPHONE MANUFACTURING CO. LTD

Contractors to Governments of the British Commonwealth and other Nations

HOLLINGSWORTH WORKS, DULWICH, LONDON, SE21

Telephone GIPsy Hill 2211

FERRANTI

Three Phase Resin Cast Transformers

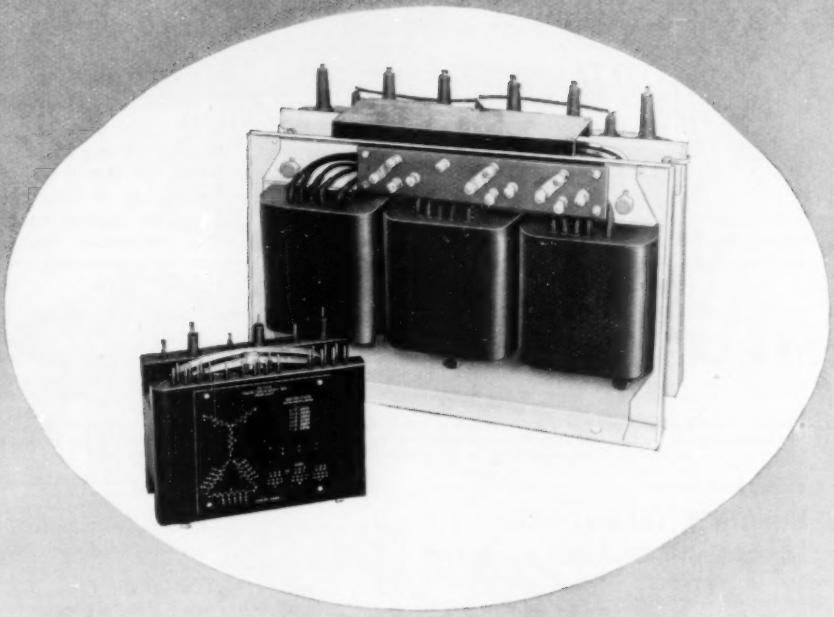

The 'Pentland' Series of Resin Cast Components has been extended to include Three-Phase Transformers with ratings up to approximately 4 kVA at 50 c.p.s. Correspondingly greater ratings are available at the higher frequencies.

List ES/T/6a includes full details of the range

FERRANTI LTD · CREWE TOLL
FERRY ROAD · EDINBURGH 5
London Office : KERN HOUSE, 36 KINGSWAY, W.C.2

FERRANTI

ES/T10

AIRMEC

KLYSTRON POWER UNIT

Type 698B

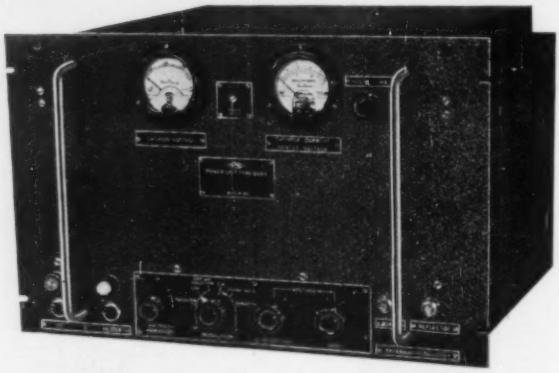

THE POWER UNIT TYPE 698B is designed to provide H.T. and L.T. supplies for high-voltage Klystron valves. All the H.T. supplies are stabilized, the output voltage change being less than 0·5% of the input voltage change. Internal oscillators provide square-wave and sawtooth modulation, and switching enables either the internal modulation, or modulation from an external source, to be applied to the grid or reflector voltages. A switch position is also provided for operation under c.w. conditions. This instrument, which operates from 210-250 volts, 50 c/s mains, is suitable for bench use, or flush mounting on a standard 19-in. rack.

Full details of this or any other Airmec instrument will be forwarded gladly upon request

AIRMEC LIMITED — HIGH WYCOMBE — BUCKINGHAMSHIRE — ENGLAND

Telephone: High Wycombe 2060 — *Cables:* Airmec, High Wycombe

APPOINTMENTS—The engagement of persons answering these advertisements must be made through the local office of the Ministry of Labour and National Service, etc., if the applicant is a man aged 18-64 or a woman 18-59 inclusive, unless he or she or the employer is excepted from the provisions of The Notification of Vacancies Order, 1952.

SUBMINIATURE TRANSFORMERS

for audio and control frequency circuits

The following types are particularly intended for junction transistors, and samples are available from stock. Screened and encapsulated versions can also be supplied.

TYPE S ($\frac{1}{4}$" × $\frac{3}{8}$" × $\frac{3}{8}$") ratios 2, 3, 4½, or 10
primary 4·5 H at 0·4 mA: 900 ohms d.c.

TYPE R ($\frac{3}{8}$" × $\frac{3}{8}$" × $\frac{3}{8}$") ratios 2, 3, 4½, or 10
primary 4·5 H at 0·8 mA: 500 ohms d.c.
or, primary 10 H at 0·4 mA: 1200 ohms d.c.
or, primary 38 H at 0·2 mA: 3200 ohms d.c.

TYPE T ($\frac{7}{16}$" × $\frac{1}{2}$" × $\frac{5}{8}$") ratios 2½, 3½, 5, or 8½
primary 12 H at 0·3 mA: 1200 ohms d.c.
or, primary 7 H at 0·75 mA: 1200 ohms d.c.

TYPE N ($\frac{7}{16}$" × $\frac{5}{8}$" × $\frac{5}{8}$") ratios 2½, 3½, 4½, or 8½
primary 30 H at 0·3 mA: 1500 ohms d.c.
or, primary 12 H at 0·75 mA: 1500 ohms d.c.

TYPE MM ($\frac{5}{8}$" × $\frac{3}{4}$" × $\frac{3}{4}$") a multi-ratio transformer with 15 ratios, 4 of which are push-pull.
MM-1A primary 15 H at 0·4 mA: 350 ohms d.c.
MM-1B primary 5 H at 2·0 mA: 350 ohms d.c.

FORTIPHONE LTD. — COMPONENT DIVISION
247, Regent Street, London, W.1

VICKERS-ARMSTRONGS (AIRCRAFT) LIMITED

have the following vacancies in their Guided Weapons Development Department:—

(1) **CALIBRATION ENGINEER.** An Engineer is required for work on calibration of electrical and electronic instruments and to investigate associated measurement techniques. Applicants for this position should have a degree or equivalent in engineering or physics and preferably have experience in electrical measurement and allied techniques.

(2) **ENGINEER DRAUGHTSMAN (Electronic).** A Draughtsman is required to engineer equipment from laboratory circuit information to prototype stage. Adequate facilities are available for the development of original techniques. A knowledge of M.O.S. requirements is desirable. The minimum academic qualification required is Higher National Certificate in Electrical Engineering or equivalent.

(3) **DRAUGHTSMEN (Electrical).** Two Draughtsmen are required to engineer prototype electronic equipment under the direction of an engineer draughtsman. A knowledge of M.O.S. requirements is desirable. Minimum qualification Ordinary National Certificate or equivalent.

Applications, quoting date and prefix number of advertisement, to: Employment Manager, Vickers-Armstrongs (Aircraft) Ltd., Weybridge Works, Weybridge, Surrey.

Weybridge is 30 minutes from London on the main Waterloo/Portsmouth Line.

Additional buses operate to and from the Works at starting and finishing times.

Canteen facilities.

Applicants should be in a position to arrange their own housing accommodation. Assistance can only be given with individual lodgings.

Holidays already arranged by applicants this year taken into account.

'Delaron' Copper-Clad completes the circuit . . .

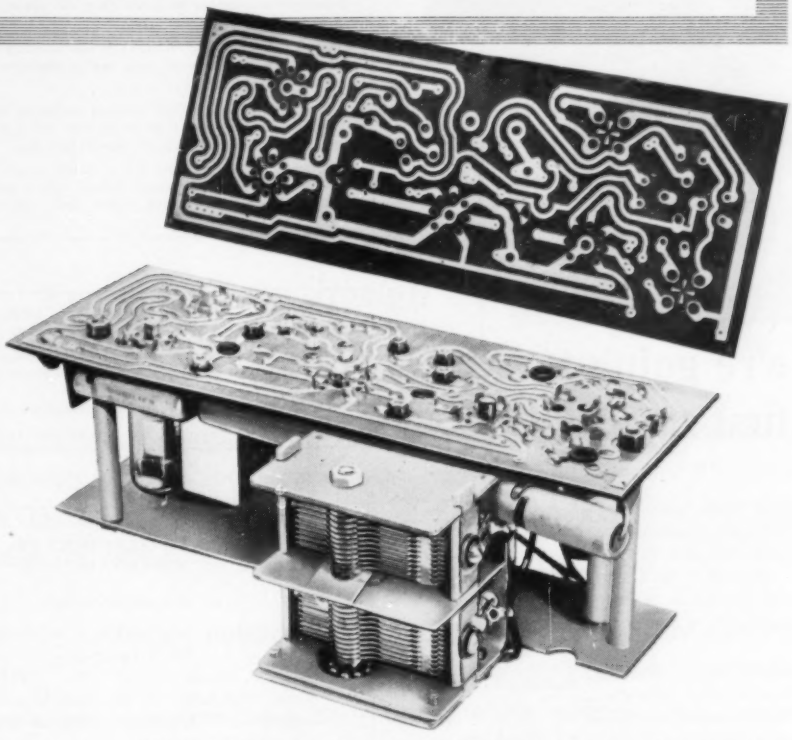

YOUR TOUR of the exhibition will not be complete until you have seen 'DELARON' Copper-Clad material on Stand 214. This grade of 'DELARON' Laminated Plastic has unique advantages in the construction of radio and television receivers and of radar and electronic equipment. When etched, Copper-Clad provides a permanent electric conductor circuit which virtually eliminates hand-wiring and facilitates uniform reproduction. You can see these printed circuits on our stand, the ceiling of which is made of alternate squares of copper-clad already etched.

There are many grades of 'DELARON' Laminated Plastic, made to meet every British Standard and Ministry specification. They have high insulation values, low water absorbtion, and can be machined easily and quickly. No wonder that 'DELARON' Laminated Plastic has many uses in varied industries.

Delaron
LAMINATED PLASTIC
MADE BY
DE LA RUE

'DELARON' is a registered trade mark

STAND 214

Write for full information to:

THOMAS DE LA RUE & CO. LIMITED (PLASTICS DIVISION) DEPT. CC6, 84-86 REGENT STREET, LONDON, W.1. TELEPHONE: REGent 2901

'We're going to need really first rate rubber...

For over a century when a problem like that has arisen, men responsible for production planning and buying have thought at once of P. B. Cow. Knowing the vast resources of the P. B. Cow organisation were always at their service.

Today, we are proud to offer an *unparalleled service to every industry*. A large team of experts, experienced in the latest and most up-to-date methods of production, is available to solve *your* problem. Experts who will bring to the job all the knowledge acquired in advising and supplying leading companies the world over.

So whenever you have a problem that concerns rubber, write or phone for one of our technicians to call. He will be fully qualified to help and advise you.

P. B. COW SERVE

Agriculture
Dairy
Motor Car
Radio
Television
Shipbuilding
Public Utilities
General Engineering
Pharmaceutical

WE SPECIALISE IN:

Production of Rubber to Metal bonded parts, Anti-vibration and Resilient Mountings, Oil Seals, Handmade Fabricated Parts, Proofed Fabrics in Natural or Synthetic Rubbers for every purpose, and Air Buoyancy work of all descriptions.

... get in touch with P. B. COW

RUBBER THAT IS RUBBER

P. B. Cow & Company Ltd., Rubber Manufacturing Specialists for every Industry. Industrial Division: 470 Streatham High Road, London, S.W.16.
Phone: Pollards 4481.

PBC

ATOMIC ENERGY RESEARCH ESTABLISHMENT, HARWELL,

has a vacancy for an **Electronic Technician** to work on the calibration, tests and fault finding of standard laboratory electronic equipment.

Applicants should have served a recognized electrical engineering apprenticeship and have good subsequent experience of electronic engineering or a good training in radio and radar. Possession of technical qualification such as Higher National or City and Guilds Certificates would be an advantage, but the successful candidate will have ample opportunity to gain experience and further his education in the electronic field.

The successful candidate will be appointed with the grade of Technical Class Grade III (£575 at age 26 rising to £715 p.a.) and will be required to join the Authority's contributory superannuation scheme.

A house will be available within a reasonable period of time for the selected officer if he is married and lives outside the radius of the Establishment's transport facilities.

Requests for Application Form should be sent on a POST CARD to the Establishment Officer, U.K. Atomic Energy Authority, A.E.R.E., Harwell, Didcot, Berks, quoting 2/103/324.

THE POLYTECHNIC, 309 REGENT STREET, W.1.
DEPARTMENT OF MATHEMATICS AND PHYSICS

A course of lectures on **Modern Electric Network Theory** will be held on Friday evenings from 7.00—9.00 commencing 7th October, 1955.

Full particulars may be obtained on application to the Head of the Department.

THE ENGLISH ELECTRIC CO. LTD. STEVENAGE

invite application for a

SENIOR METHODS ENGINEER (ELECTRONIC)

with experience of the manufacture and assembly of Electronic Units for medium quantity production.

Applicants, who should have served an apprenticeship and possess H.N.C. or equivalent together with some years' workshop experience, will have the opportunity of reviewing designs for suitability of manufacture. They should also be capable of estimating and have some knowledge of tooling required.

Some experience of service and/or Ministry requirements would be advantageous.

Housing assistance will be available to successful applicant from the Greater London Area and those resident elsewhere will have consideration. Applications to Dept. C.P.S., 336-7 Strand, London, W.C.2, quoting Ref. 1343E

MARCONI'S WIRELESS TELEGRAPH COMPANY LIMITED

Chelmsford

Essex

★

Leaders in the Design and Manufacture of Electronic Equipment

are expanding their development activities. Excellent opportunities therefore exist for both Junior and Senior Engineers and Physicists to make careers in this famous organization for work on wide range of interesting projects.

In particular, there are vacancies in connection with the development of Television Cameras, Transmitters, Telecine and other associated equipment for both black, white pictures and colour. In addition, there are also opportunities for working in the field of Marine Radar and Communication equipment.

All the appointments are permanent and pensionable and offer excellent prospects of promotion. In addition, training at the world-famous Marconi College will be given to selected applicants.

Please apply giving full details of qualifications and experience to Dept. C.P.S., 336/7, Strand, London, W.C.2, quoting Ref. S.A. 55c.

ELECTRONIC TUBES LIMITED

AN ASSOCIATED COMPANY
of
ELECTRIC & MUSICAL INDUSTRIES LTD.

have vacancies for several **Experimental Officers** and **Assistant Experimental Officers** to be trained, at full salary, on experimental valve projects. Successful candidates will be engaged upon the design, construction and electrical measurements of valves in the research and development stages. Qualifications required are:

(*a*) *Experimental Officers:* Pass degree or higher national certificate in physics, or electrical engineering or equivalent.

(*b*) *Assistant Experimental Officers:* General certificate of education with advanced level in general science or ordinary national certificate.

The above requirements may be waived in the case of applicants with experience in a suitable technical field.

Salaries are based on qualifications, experience and age, and are in keeping with present-day levels. General prospects within the organization are excellent and there is a generous pension scheme. Apply to Personnel Officer, Electronic Tubes Ltd., Kingsmead Works, High Wycombe, Bucks.

TECHNICAL AUTHOR (ELECTRONIC)

required by

THE GUIDED WEAPONS DIVISION

of THE ENGLISH ELECTRIC CO. LTD.

This is a senior post of great technical interest, carrying responsibility for the preparation of handbooks for the guidance and information of Senior Engineers.

Previous experience in this work is not necessary, but the applicants should have sound theoretical knowledge of electronics, preferably to degree standard, together with the ability to write concise English.

The post will be at Luton initially, later at **STEVENAGE, HERTS**, and successful candidates can be considered for housing assistance, especially if resident in the Greater London Area.

Applications to Dept. C.P.S., 336/7 Strand, London, W.C.2, quoting Ref. 1392D.

FEDERATION OF NIGERIA

Vacancies exist in the Posts and Telegraphs Department of the Federation of Nigeria for Engineers, Area Engineers, Staff Engineers and Assistant Staff Engineers.

Duties include the supervision of staff; installation and maintenance of equipment, particularly carrier and V.H.F.; planning, construction and maintenance of telegraph and telephone systems and overhead and underground lines; general duties at H.Q., study of maintenance methods; fault control, etc.

Appointments are on contract in the salary range £1,116–£2,250 per annum gross according to the particular post, with a gratuity of £150 per annum. Engineers may also be appointed on pensionable terms in the salary range £910–£1,560 per annum gross. Quarters are provided. Generous leave. Free first-class passages.

Candidates for **Engineers** appointments should be between 25 and 35 years of age and must have passed or be exempt from Sections A and B of the examination for A.M.I.E.E. or be Assistant Engineers in the British Post Office with experience in modern telecommunications practice. Experience with V.H.F. multichannel equipment an advantage; for **Area Engineers,** must be Corporate Members of the Institution of Electrical Engineers or have passed the British Post Office examination for Executive Engineers and have at least five years' experience in a responsible position in industry or as an Executive Engineer; and for **Staff Engineers and Assistant Staff Engineers,** must be either Corporate Members of the Institution of Electrical Engineers or have passed the British Post Office examination for Executive Engineers and have at least seven years' experience. **Post Office candidates for Staff Engineers should hold the rank of Senior Executive Engineer.**

Further particulars on application in writing to Director of Recruitment, Colonial Office, London, S.W.1, quoting the Reference No. BCD108/14/05D27, and post of which particulars are required. **All Post Office candidates should submit applications through their Personnel Department.**

Closing date for receipt of initial enquiries 31st August 1955.

A. V. ROE & CO., LTD.
offer interesting vacancies for Technicians
in the following fields

Servomechanisms
Applied Electronics
Mechanical Engineering
Hydraulic Engineering

Normal qualification H.N.C. or the equivalent, but young applicants without qualifications in the above fields will be considered. This is an opportunity to join a newly-formed Division whose laboratories are situated in a rural area.

Apply to:
THE CHIEF ENGINEER,
WEAPONS RESEARCH DIVISION,
A. V. ROE & CO., LTD.,
WOODFORD, CHESHIRE.

FEDERATION OF MALAYA

ASSISTANT CONTROLLERS OF TELECOMMUNICATIONS (ENGINEERING)

Duties include staff management and responsibility for the maintenance, installation and operation of telecommunications equipment, including exchanges, carrier equipment, telegraph and railway signalling equipment and minor radio stations.

Appointments on contract/gratuity terms with salary according to qualifications and experience in the range $718 to $1,645 (£1,001 to £2,303 per annum). Variable cost of living allowance also payable. Substantial gratuity; free passages; quarters provided if available at low rental or rent allowance in lieu; generous leave.

Candidates, under 40 years of age, should be corporate or graduate members of the Institution of Electrical Engineers or hold a degree or diploma acceptable by the Institution for corporate membership and have at least two years' practical experience in telecommunications work.

Further details on application to the Director of Recruitment, Colonial Office, Great Smith Street, London, S.W.1, in writing, giving brief details of age, qualifications and experience and quoting reference number BCD 133/23/03. Closing date for receipt of initial enquiries 17th September, 1955.

THE STANDARD TELECOMMUNICATION LABORATORIES

invite applications from suitably qualified and/or experienced personnel for interesting and progressive positions in the following fields:—

Microwave communication systems, antennae, and millimetre waves.

Digital circuit techniques.

Transistor development and applications.

Circuit development for telecommunications and television.

The overall performance of communication systems of all types.

Requests for further details or for an informal interview should be addressed to Mr. P. J. Rogers, Personnel Manager, Standard Telecommunication Laboratories Limited, Progress Way, Great Cambridge Road, Enfield, Middlesex.

HER MAJESTY'S OVERSEA CIVIL SERVICE

Applications are invited for the following post:—

Telecommunications Engineer, Posts and Telegraphs Department, Sierra Leone

Duties cover all general branches of telecommunications engineering, maintenance and construction of overhead and underground line plant, all types of telephone exchanges, telegraph apparatus, and point to point radio networks.

Appointment is either pensionable in the salary range £822-£1,562 p.a. gross or on contract for two tours of 18-24 months each, in the salary range £886-£1,758 p.a. gross, plus a gratuity of £25 to £37 10s. for each completed three months' satisfactory service. Free first-class passages for the officer, his wife and up to two children under 10 years of age. Government quarters are provided, if available, at low rentals. Leave is granted at the rate of seven days for each month of resident service.

Candidates should be A.M.I.E.E. or have passed or be exempt from Parts A and B of the Institution's examination. A sound knowledge of the theory of telecommunications engineering is necessary and extensive experience of its application.

Apply in writing to the Director of Recruitment, Colonial Office, Great Smith Street, London, S.W.1, giving briefly age, qualifications and experience. Mention the reference number BCD 108/15/03. Closing date for the receipt of initial applications 17th September, 1955.

Senior Radio Superintendents required for the **East Africa High Commission Directorate of Civil Aviation** for permanent and pensionable employment subject to a probationary period of two years. Established civil servants could be appointed on "temporary transfer" terms. Salary scale (including inducement pay and present 10 per cent. temporary allowance) £1,320 rising to £1,498 a year. Free passages. Liberal leave on full salary. Candidates preferably between 30 and 40, must have had ten years in civil aviation with considerable experience of flying or aeronautical ground station operating. They should have had extensive experience in installation and maintenance work and the organization of communication and maintenance systems. Preference will be given to candidates with a City and Guilds Full Technicological Certificate. Write to the Crown Agents, 4 Millbank, London, S.W.1. State age, name in block letters, full qualifications and experience and quote M2C/40895/WJ.

TELEPHONE CABLE ENGINEER

British Insulated Callender's Cables Ltd. require an experienced engineer to specialize in telephone transmission and distribution schemes. In this rapidly expanding field the post offers good opportunities for the right man. Applicants should have a good technical background coupled, preferably, with experience in the design or installation of telephone cable systems. Some experience of the associated terminal and repeater equipment would be an advantage. Replies quoting reference number P/88/55, should be addressed to the Staff Officer, B.I.C.C. Ltd., Prescot, Lancs.

Supervising Technicians (Aeradio) required by the **East Africa High Commission Directorate of Civil Aviation** for permanent and pensionable employment subject to a probationary period of two years. Established civil servants could be appointed on " temporary transfer " terms. Salary scale (including inducement pay and present 10 per cent. temporary allowance) £1,161 rising to £1,280 a year. Free passages. Liberal leave on full salary. Candidates should preferably have served an engineering apprenticeship and should have had at least five years' experience in the installation and servicing of aeronautical telecommunications equipment including radio and radar aids to navigation. They should have an up-to-date knowledge of workshop practice with experience in servicing diesel generators. Preference will be given to candidates who possess a City and Guilds Intermediate Certificate in Radio Communications or equivalent qualification. Write to the Crown Agents, 4 Millbank, London, S.W.1. State age, name in block letters, full qualifications and experience and quote M2C/40899/WJ.

Wireless Operator Mechanics required by **Falkland Islands Dependencies Survey** for service at isolated British bases in the Antarctic. Must be able to transmit and receive morse at 20 words a minute (plain language or code) and be capable of elementary maintenance of wireless transmitting and receiving equipment. Salary according to age in scale £330 rising to £420 a year with all found, including clothing and canteen stores. Candidates should be keen young men, between 20 and 30 years, preferably single, of good education and high physical standard, with a genuine interest in polar research and travel and willing to spend 18 or 30 months under conditions which are a test of character and resource. Write to the Crown Agents, 4 Millbank, London, S.W.1. State age, name in block letters, full qualifications and experience and quote M2C/41024/WJ.

Assistant Chief Engineer required by the Electronics Division of a well-known Radio Company in the Home Counties. Excellent prospects exist for a first-class man with an up-to-date knowledge of electronic equipment design, in particular Radio Communication and Radar Systems, and the ability to plan and organize research and development work in these fields. Applications, which should give full details of experience, qualifications, age and salary expected, are invited to Box No. 380, 6 Aldford Street, London, W.1.

A. V. ROE & CO. LTD.
offer
Applied Research and Development work in the following fields for young Graduates in Science or Engineering:—

Servomechanisms
Applied Electronics
Supersonic Aerodynamics
Mechanical Engineering
Hydraulic Engineering

Attractive salaries depending on experience and qualifications. This is an opportunity to join new laboratories situated in rural surroundings.

Apply to:
THE CHIEF ENGINEER,
WEAPONS RESEARCH DIVISION,
A. V. ROE & CO. LTD.,
WOODFORD, CHESHIRE.

EXPERIENCED RADIO TESTERS AND INSPECTORS
Required for production of communication and radio apparatus. Also instrument makers, wirers and assemblers for factory test apparatus. Apply Personnel Manager, E. K. Cole, Ltd., Ekco Works, Malmesbury, Wilts.

BBC invites applications for post in Recording Section of Engineering Designs Department. University degree or equivalent in electrical engineering essential, experience in audio frequency electronics and design of light mechanisms desirable. Work is largely on own initiative in carrying out investigations and development work in connection with various methods of sound recording. Salary, according to qualifications and experience, within range £725 to £1,280. Requests for application forms to Engineering Establishment Officer, Broadcasting House, London, W.1, quoting reference E.210/W.E.

D.S.I.R. require **Assistant Experimental Officer** at Radio Research Station, Datchett, Berks, for abstracting scientific and technical articles on radio research and development. Quals. in Physics or Electrical Eng. Min.: G.C.E. (Advanced Level) in two scientific subjects, or equiv. Candidates over 22 expected to have pass degree, H.N.C. or equiv. Some knowledge and experience radio research and development necessary, ability to read technical French and German an advantage. 45½-hour week—Men £297 (age 18)—£659, Women £297 (age 18)—£570 p.a., subject to improvement under equal pay scheme. Application forms from M.L.N.S., Technical and Scientific Register (K), 26 King Street, London, S.W.1, quoting A114/5A. Closing date 20th August, 1955.

Radio and Television Service Manager required. Ten miles from Manchester. Main Agencies. Applicant must have had similar previous experience and be able to take complete control, engaging his own staff when necessary. Permanent post with prospect of directorship in private company. Salary £800 per annum rising to £1,000. No accommodation provided. Successful applicant will be expected to purchase own house in district. Apply in confidence to Box 5046, c/o *Wireless Engineer*.

COVENTRY TECHNICAL COLLEGE
Required.—Lecturer in Electronic Engineering for September, 1955, or later by arrangement. Candidates should hold degree or equivalent and have had recent industrial experience in Line Communication or Industrial Electronics. Burnham Technical Scale Salary £965 × £25—£1,065. Application forms and further particulars from Director of Education, Council House, Coventry.

Maintenance Technician required by the National Film Board of Canada for duty in sound recording studios in Ottawa and Montreal. Applicant must have had several years' experience in either Film Broadcasting or Recording studios and should be familiar with transmission testing of audio equipment. Salary $5,500 by yearly contract with air transportation paid.

SALES REPRESENTATIVE
Airmec Limited, High Wycombe, have a vacancy for a Technical Sales Representative. Able to drive and willing to travel abroad if necessary. Apply, giving full details of experience and salary required to Personnel Officer.

ELECTRONICS

The English Electric Co. Ltd. have vacancies for **Engineers** with the **Guided Weapons Division** at **Luton** and **Stevenage, Herts,** as follows:—

Senior Microwave Engineer—Applicant should have background to degree standard and experience of design or engineering of microwave equipment. The work includes investigation of new methods of construction with a view to miniaturization and weight reduction.

Senior Engineer—for work on general circuit development, with sound fundamental knowledge of electronics and the ability to apply it.

Senior Engineer—with not less than three years' experience on general pulse circuit development as applied to radar displays. Experience of magnetic amplifiers and analogue computors desirable but not essential.

Senior Radar and Electronic Engineers—for development and field and flight experiments on **Radar Equipment.** Degree or H.N.C. standard preferred, applicants without these qualifications but with a wide experience of this work considered.

These posts offer attractive salaries and excellent opportunities. Housing assistance can be given in some cases.

Apply to Dept. C.P.S., 336-7 Strand, London, W.C.2, quoting Ref. No. 1160D.

CHIEF OF RESEARCH AND DEVELOPMENT

Thermionic Valves

A leading electronic valve and cathode ray tube manufacturer invites applications for the position of

CHIEF OF RESEARCH AND DEVELOPMENT

Applicants should have high technical qualifications and administrative ability as the appointment is an important one carrying with it the responsibility of control and administration of existing staff of physicists, engineers and chemists.

The sphere of duties would embrace:

(*a*) direction of technical services and development work on product utilization.

(*b*) direction of research work throughout the company in pursuance of an agreed policy.

(*c*) ensuring the maximum contribution of the laboratories to process improvement and economic production.

(*d*) the appointment would carry the responsibility of expanding the existing organization within agreed limits.

Salary commensurate with qualifications and experience. Generous pension and other arrangements.

Fully detailed applications should be addressed in confidence to Box No. 4956, c/o *Wireless Engineer*.

TELECOMMUNICATION ENGINEERS (TWO)

are required as Section Leaders for submerged repeater development by the firm which is manufacturing the major portion of the transatlantic telephone cable. Applicants should possess extensive experience of carrier telephone systems as applied to long-distance land cables. They should also have specialized knowledge on the selection of filters or feedback amplifiers. Minimum academic qualifications: Second class honours degree in Physics or Engineering. Ability to read technical German preferred. The work is interesting and in clean surroundings. Salary according to experience £800-£1,000 per annum; bonus normally added after qualifying period. Applicants having the same academic qualifications but less experience will be considered for posts as junior engineers on the same work. Salary in the range £600-£800 per annum plus bonus. Women applicants will also be considered. Pension Scheme, five-day week, all welfare facilities. Write details to: Personnel Manager, Submarine Cables, Ltd., Telcon Works, Greenwich, London, S.E.10.

E. K. COLE, LTD. (MALMESBURY DIVISION)

The Malmesbury Division of E. K. Cole is engaged in the development and production of radar and communication equipment associated with high priority defence projects. Vacancies exist in the Development Department for Project Engineers, Engineers and Assistant Engineers with training and experience in the following fields:—

Pulse Circuits	Pulse Modulators. Strobe Systems. Video Amplifiers. Time Base Generators, etc.
H.F. and V.H.F. Communication ..	Airborne and Ground Receivers, Transmitters and Aerial Systems.

Applicants should have had technical training to Degree or Higher National Certificate standard, and in the case of Project Engineers and Engineers appropriate technical design experience is necessary. Commencing salaries will be dependent on qualifications and experience and will compare favourably with scales prevailing in the radio industry. A superannuation scheme is in operation. Applicants should apply in the first instance for a technical staff application form to Personnel Manager, E. K. Cole, Ltd., Malmesbury, Wilts.

THE WORLD'S GREATEST BOOKSHOP

FOYLES

• FOR BOOKS •

New and secondhand Books on every subject. Large Technical dept. Stock of over three million volumes.

119-125 CHARING CROSS ROAD, LONDON, W.C.2

Gerrard 5660 (16 lines) ★ Open 9—6 (inc. Sat.)

RADIO
ELECTRONICS
ELECTRICAL ENGINEERING
BOOKS

A LARGE SELECTION ALWAYS IN STOCK and in the SCIENTIFIC AND TECHNICAL LENDING LIBRARY (Yearly Subscription 25s.)

H. K. LEWIS & Co. Ltd. 136 Gower Street, London, W.C.1. EUS 4282

Development Engineer (with Degree) required for telecommunication cables and testing equipment. Permanent and progressive position with pension scheme. Please apply, giving full particulars to Box No. 5397, c/o *Wireless Engineer*.

ENGINEERS AND PHYSICISTS

Ferranti Limited, in their new Laboratories are engaged in a programme of electronic development of great industrial importance. The work involves the use of digital computers to control machines and industrial processes and covers a wide and expanding field of application, offering long-term interest to those engaged in it.

Development activity for these projects is taking place in the field of electronic circuitry (including pulse technique), digital computers, magnetic recording and servomechanisms. Engineers and Physicists having experience as well as interest in one or more of these subjects are invited to apply.

The appointments are permanent and offer full scope for initiative in an expanding organization. A salary commensurate with the qualifications required will be paid. Staff Pension Scheme. Application Form will be sent on request (quoting Ref. EP/AL) to the Personnel Officer, Ferranti Limited, Ferry Road, Edinburgh, 5.

Development and Production of Industrial and Trade Moulding by Injection and Compression techniques. Specialists in P.V.C. mouldings, and work incorporating metal inserts for the Aircraft, Electrical and Electronic Industries.

BRITISH PLASTICS DEVELOPMENTS Ltd.

PARKGATE · NEWDIGATE · SURREY

TELEPHONE NEWDIGATE 269

Anderton

Cyril Circlip's stock ranges from 1/16" to 10"

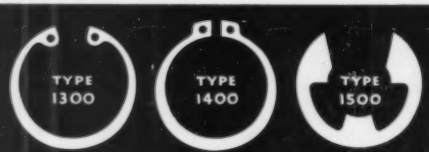

Write for DATA SHEETS to Dept. A.3., ANDERTON SPRINGS LTD., BINGLEY

Telephone: 2226 & 2351
Telegrams: Circlips, Bingley

CIRCLIPS

Index to Advertisers

	PAGE
Aero Research, Ltd.	14
Airmec, Ltd.	26
Anderton Springs, Ltd.	34
Appointments Vacant	26, 28, 29, 30, 31, 32, 33, 34
Automatic Coil Winder & Electrical Equipment Co., Ltd., The	Cover ii
Belling & Lee, Ltd.	10
British Insulated Callender's Cables, Ltd.	6
British Physical Laboratories	22
British Plastics Developments, Ltd.	34
Brookes Crystals, Ltd.	22
Brüel & Kjær	24
Cinema Television, Ltd.	15
Cow, P. B. & Co., Ltd.	28
De La Rue, Thomas & Co., Ltd.	27
Edison Swan Electric Co., Ltd.	19
Electro-Methods, Ltd.	8
English Electric Valve Co., Ltd.	3
Ferranti, Ltd.	25
Fortiphone, Ltd.	26
Foyle, W. & G., Ltd.	34
General Electric Co., Ltd., The	9
Lewis, H. K. & Co., Ltd.	34
Lyons, Claude, Ltd.	1
Marconi Instruments, Ltd.	23
Marconi's Wireless Telegraph Co., Ltd.	12
McMurdo Instrument Co., Ltd.	20
Muirhead & Co., Ltd.	20
Mullard, Ltd.	16, 18
Multicore Solders, Ltd.	Cover iv
Oxley Developments Co., Ltd.	22
Rola-Celestion, Ltd.	11
Salford Electrical Instruments, Ltd.	4
Standard Telephones & Cables, Ltd.	21
Steatite & Porcelain Products, Ltd.	2
Telegraph Condenser Co., Ltd., The	Cover iii
Telephone Mfg. Co., Ltd.	24
Thomas, Richard & Baldwins, Ltd.	5
Unbrako Socket Screw Co., Ltd.	13
Welwyn Laboratories, Ltd.	7

Printed in Great Britain for the Publishers, Iliffe & Sons, Ltd., Dorset House, Stamford Street, London, S.E.1 by W. P. Griffith & Sons, Ltd., London and Bedford.

T.C.C. — intimately associated with every major Radio development since the earliest days of Broadcasting — were among the first to grasp the far-reaching potentialities of Printed Circuitry.

For months past, in fact, a team of T.C.C. Research Engineers has been actively engaged in the development of Printed Circuits for such diverse applications as radio, television, radar, instrumentation and national defence.

This technical service, incorporating the advantages of Condensers specially developed for the purpose, is now made freely available to all manufacturers. Printed Circuits reduce production costs and ensure greater uniformity and accuracy on such items as aerial filters, T/V tuners, I.F. transformers, aerial cross-over networks for Bands I and III, and F.M. tuners. Why not take advantage of our experience in these developments?

Those interested *in various applications of Printed Circuits in the electronic industry are invited to register their names to receive our Technical Bulletins as issued. Manufacturers should apply to our Special Products Division for details of service available.*

TCC

THE TELEGRAPH CONDENSER CO. LTD

SPECIAL PRODUCTS DIVISION · North Acton · London W3 · Tel: ACOrn 0061

AT THE NATIONAL RADIO EXHIBITION

1947	1949	1950	1951	1952	1953	1954
BUSH RADIO LTD.	EMI/HMV	GEC LTD.	E. K. COLE LTD.	PYE LTD.	PHILIPS ELECTRICAL LTD.	FERGUSON RADIO CORPORATION

Now- R·G·D demonstrates soldering with ERSIN MULTICORE

On the Multicore stand (number 63, in the main hall) at this year's Radio Show, operatives will solder and assemble R.G.D. Mains/Battery Portable Radio Receivers. They will be using Ersin Multicore 5-core Solder because, like other leading manufacturers of radio and T/V equipment, R.G.D. rely on Ersin Multicore to preserve the high standard of their sets.

7 LB. REEL

Ersin Multicore 5-core Solder is available as standard in 6 alloys and 9 gauges on 7 lb. and 1 lb. reels. Finer gauges, from 24 s.w.g. to 34 s.w.g., are supplied on ½ lb. reels. Prices on application.

PRINTED CIRCUITS

Full details of a complete soldering process developed by the Multicore Laboratories for efficient soldering of printed circuits, are contained in leaflet P.C.101. It also includes details of Multicore Activated Surface Preservative, a protective coating which prevents oxidation during storage.

Bib WIRE STRIPPER AND CUTTER

This handy tool strips insulation without nicking the wire, cuts wire cleanly and splits plastic extruded twin flex. Adjustable to most wire thicknesses. 3/6 each (subject)

Bib RECORDING TAPE SPLICER Enables recording tape to be jointed quickly and accurately. 18/6 each (subject)

MULTICORE SOLDERS LTD., MULTICORE WORKS, HEMEL HEMPSTEAD, HERTS. (BOXMOOR 3636)